

# PC900V0NSZX/ PC900V0YSZX

## ■ Features

1. Normal OFF operation, open collector output
2. TTL and LSTTL compatible output
3. Operating supply voltage  $V_{CC}$ :3 to 15V
4. Isolation voltage (Viso (rms)):5kV
5. Recognized by UL, file No.E64380  
Approved by TÜV (VDE0884) (PC900V0YSZX)
6. 6-pin DIP package

## ■ Applications

1. Programmable controllers
2. PC peripherals
3. Electronic musical instruments

## ■ Model Line-up

Model No.	* Safety Standard Approval		Package	Packing
	UL	TÜV (VDE0884)		
PC900V0NSZX	○	—	DIP	Sleeve
PC900V0YSZX	○	○		

\* Application Model No. PC900V

## ■ Absolute Maximum Ratings

( $T_a=25^{\circ}\text{C}$ )

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	70	mW
Output	Supply voltage	$V_{CC}$	16	V
	High level output voltage	$V_{OH}$	16	V
	Low level output current	$I_{OL}$	50	mA
	Power dissipation	$P_O$	150	mW
	Total power dissipation	$P_{tot}$	170	mW
	*2 Isolation voltage	$V_{iso}$ (rms)	5	kV
	Operating temperature	$T_{opr}$	-25 to +85	$^{\circ}\text{C}$
	Storage temperature	$T_{stg}$	-40 to +125	$^{\circ}\text{C}$
	*3 Soldering temperature	$T_{sol}$	260	$^{\circ}\text{C}$

\*1 Pulse width $\leq 100\mu\text{s}$ , Duty ratio=0.001


\*2 40 to 60%RH, AC for 1 min

\*3 For 10 s

## Digital Output Type OPIC Photocoupler

## ■ Outline Dimensions

(Unit : mm)

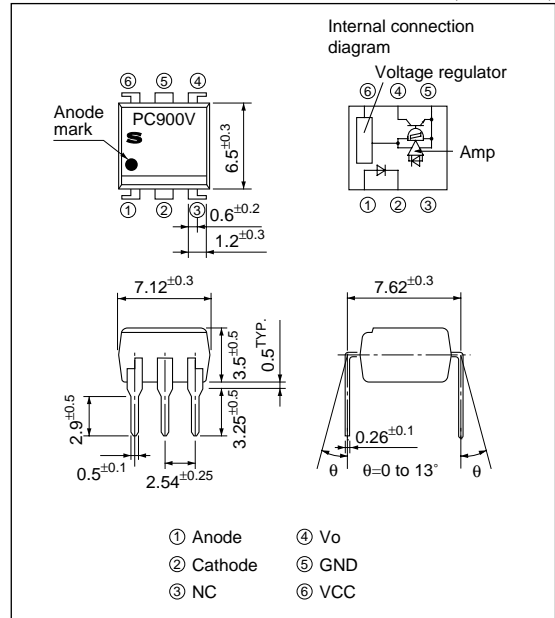

\* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.  
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Electro-optical Characteristics

(Ta=0 to 70°C unless spesified)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =4mA	-	1.1	1.4	V
			I <sub>F</sub> =0.3mA	0.7	1.0	-	
	Reverse current	I <sub>R</sub>	Ta=25°C, V <sub>R</sub> =3V	-	-	10	μA
	Terminal capacitance	C <sub>t</sub>	Ta=25°C, V=0, f=1kHz	-	30	250	pF
Output	Operating supply voltage	V <sub>CC</sub>		3	-	15	V
	Low level output voltage	V <sub>OL</sub>	I <sub>oL</sub> =16mA, V <sub>CC</sub> =5V, I <sub>F</sub> =4mA	-	0.2	0.4	V
	High level output current	I <sub>OH</sub>	V <sub>O</sub> =V <sub>CC</sub> =15V, I <sub>F</sub> =250μA	-	-	100	μA
	Low level supply current	I <sub>CCL</sub>	V <sub>CC</sub> =5.5V, I <sub>F</sub> =0	-	2.5	5.0	mA
	High level supply current	I <sub>CCH</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =0	-	1.0	5.0	mA
	*4 "High→Low" threshold input current	I <sub>FHL</sub>	Ta=25°C, V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	-	1.1	2.0	mA
			V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	-	-	4.0	
	*5 "Low→High" threshold input current	I <sub>FLH</sub>	Ta=25°C, V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.4	0.8	-	mA
			V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.3	-	-	
	*6 Hysteresis	I <sub>FLH</sub> /I <sub>FHL</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.5	0.7	0.9	-
Isolation resistance	R <sub>ISO</sub>	Ta=25°C, DC=500V, 40 to 60%RH	5×10 <sup>10</sup>	10 <sup>11</sup>	-	Ω	
Transfer characteristics	*7 Response time	"High→Low" propagation delay time	Ta=25°C V <sub>CC</sub> =5V, I <sub>F</sub> =4mA R <sub>L</sub> =280Ω	-	1	3	μs
		"Low→High" propagation delay time		-	2	6	
		Fall time		-	0.05	0.5	
		Rise time		-	0.1	0.5	


\*4 I<sub>FHL</sub> represents forward current when output goes from high to low.

\*5 I<sub>FLH</sub> represents forward current when output goes from low to high.


\*6 Hysteresis stands for I<sub>FLH</sub>/I<sub>FHL</sub>.

\*7 Test circuit for response time is shown below.


Fig.1 Test Circuit for Response Time

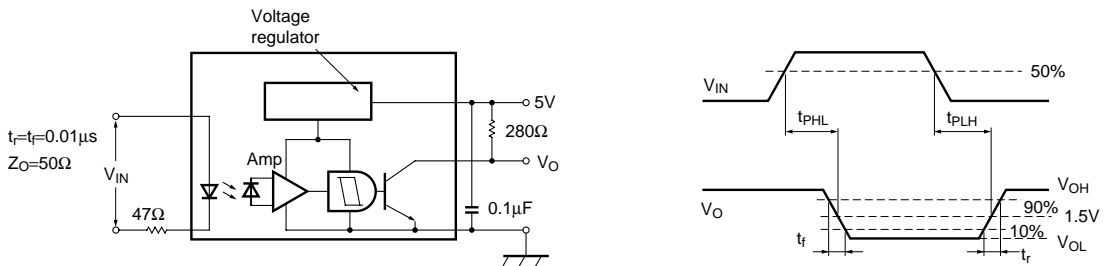


**Fig.2 Forward Current vs. Ambient Temperature**

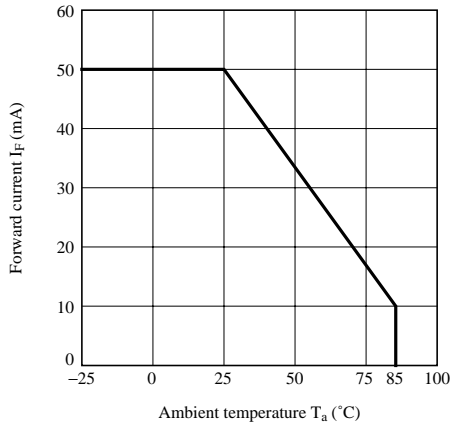


**Fig.3 Power Dissipation vs. Ambient Temperature**

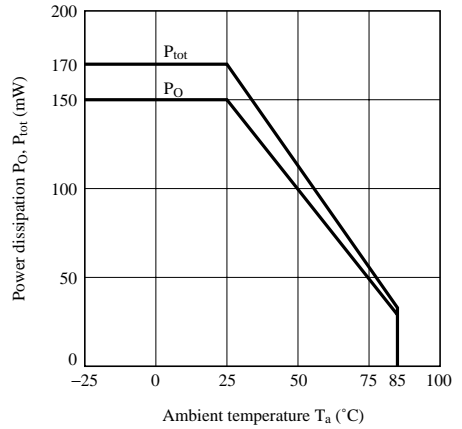


**Fig.4 Forward Current vs. Forward Voltage**

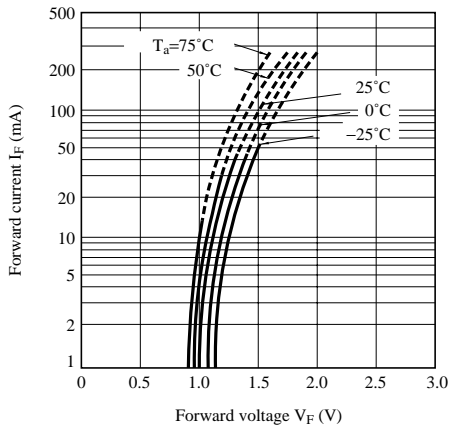


**Fig.5 Relative Threshold Input Current vs. Supply Voltage**

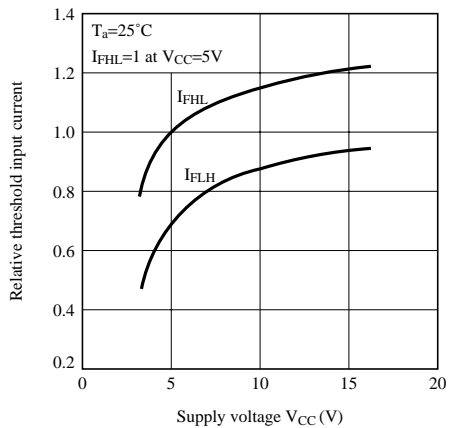


**Fig.6 Relative Threshold Input Current vs. Ambient Temperature**

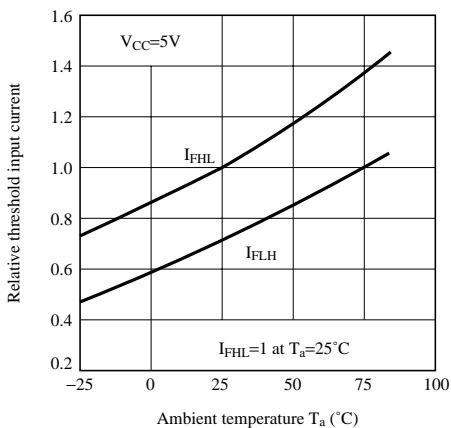


**Fig.7 Low Level Output Voltage vs. Low Level Output Current**

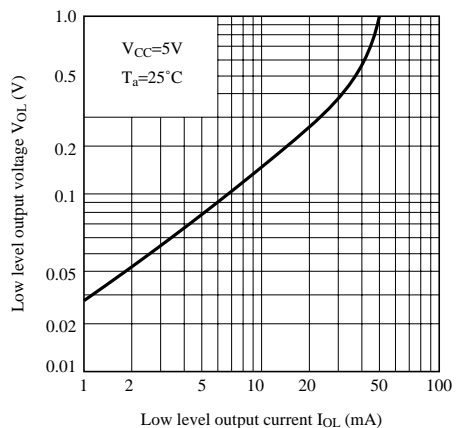


**Fig.8 Low Level Output Voltage vs. Ambient Temperature**

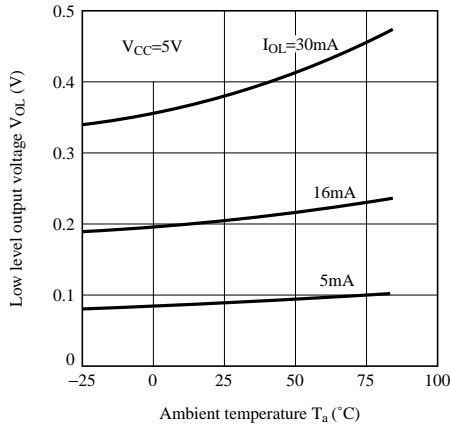


**Fig.9 Supply Current vs. Supply Voltage**

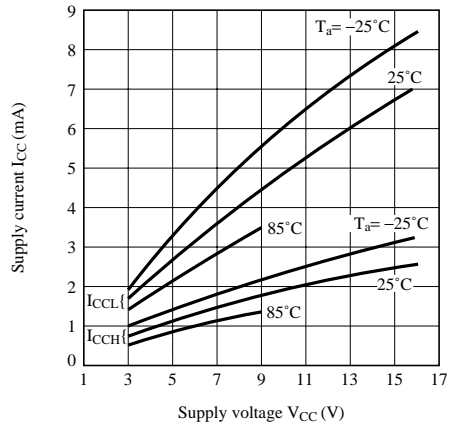

**Fig.10 Propagation Delay Time vs. Forward Current**

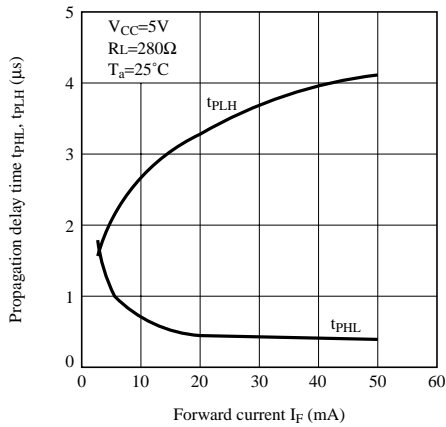

**Fig.11 Rise Time, Fall Time vs. Load Resistance**

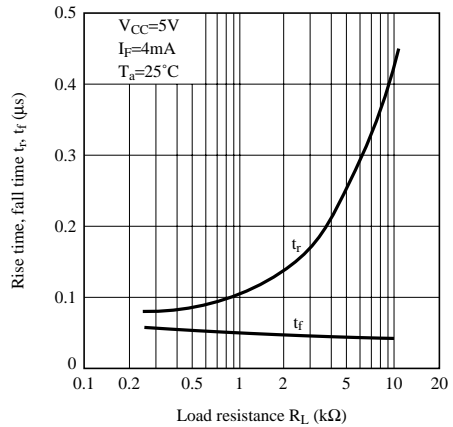

**■ Precautions for Use**

1. It is recommended that a by-pass capacitor of more than 0.01μF is added between  $V_{CC}$  and GND near the device in order to stabilize power supply line.
2. Handle this product the same as with other integrated circuits against static electricity.

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

# PC900V0NIZX/ PC900V0NIPX

## ■ Features

1. Normal OFF operation, open collector output
2. TTL and LSTTL compatible output
3. Operating supply voltage  $V_{CC}$ : 3 to 15V
4. Isolation voltage (Viso (rms)): 5kV
5. Recognized by UL, file No.E64380
6. 6-pin DIP package (Lead forming type)

## ■ Applications

1. Programmable controllers
2. PC peripherals
3. Electronic musical instruments

## ■ Model Line-up

Model No.	* Safty Standard Approval		Package	Packing
	UL	TÜV (VDE0884)		
PC900V0NIZX	○	—	Surface Mount	Sleeve
PC900V0NIPX	○	—	Mount	Taping

\* Application Model No. PC900V

## ■ Absolute Maximum Ratings

( $T_a=25^{\circ}\text{C}$ )

	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	*1 Peak forward current	$I_{FM}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P$	70	mW
Output	Supply voltage	$V_{CC}$	16	V
	High level output voltage	$V_{OH}$	16	V
	Low level output current	$I_{OL}$	50	mA
	Power dissipation	$P_O$	150	mW
	Total power dissipation	$P_{tot}$	170	mW
	*2 Isolation voltage	$V_{iso}$ (rms)	5	kV
	Operating temperature	$T_{opr}$	-25 to +85	$^{\circ}\text{C}$
	Storage temperature	$T_{stg}$	-40 to +125	$^{\circ}\text{C}$
	*3 Soldering temperature	$T_{sol}$	260	$^{\circ}\text{C}$

\*1 Pulse width $\leq$ 100 $\mu$ s, Duty ratio=0.001


\*2 40 to 60%RH, AC for 1 min

\*3 For 10 s

## Digital Output Type OPIC Photocoupler

## ■ Outline Dimensions

(Unit : mm)

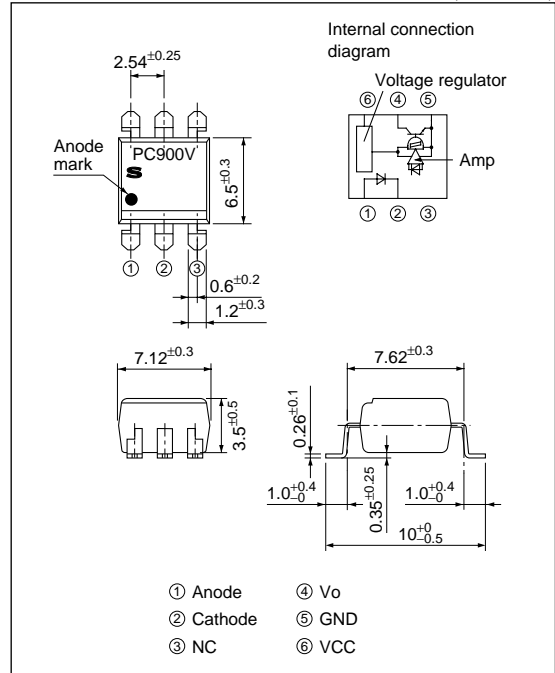

\* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.  
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Electro-optical Characteristics

(Ta=0 to 70°C unless spesified)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =4mA	-	1.1	1.4	V
			I <sub>F</sub> =0.3mA	0.7	1.0	-	
	Reverse current	I <sub>R</sub>	Ta=25°C, V <sub>R</sub> =3V	-	-	10	μA
	Terminal capacitance	C <sub>t</sub>	Ta=25°C, V=0, f=1kHz	-	30	250	pF
Output	Operating supply voltage	V <sub>CC</sub>		3	-	15	V
	Low level output voltage	V <sub>OL</sub>	I <sub>oL</sub> =16mA, V <sub>CC</sub> =5V, I <sub>F</sub> =4mA	-	0.2	0.4	V
	High level output current	I <sub>OH</sub>	V <sub>O</sub> =V <sub>CC</sub> =15V, I <sub>F</sub> =250μA	-	-	100	μA
	Low level supply current	I <sub>CCL</sub>	V <sub>CC</sub> =5.5V, I <sub>F</sub> =0	-	2.5	5.0	mA
	High level supply current	I <sub>CCH</sub>	V <sub>CC</sub> =5V, I <sub>F</sub> =0	-	1.0	5.0	mA
	*4 "High→Low" threshold input current	I <sub>FHL</sub>	Ta=25°C, V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	-	1.1	2.0	mA
			V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	-	-	4.0	
	*5 "Low→High" threshold input current	I <sub>FLH</sub>	Ta=25°C, V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.4	0.8	-	mA
			V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.3	-	-	
	*6 Hysteresis	I <sub>FLH</sub> /I <sub>FHL</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =280Ω	0.5	0.7	0.9	-
Isolation resistance	R <sub>ISO</sub>	Ta=25°C, DC=500V, 40 to 60%RH	5×10 <sup>10</sup>	10 <sup>11</sup>	-	Ω	
Transfer characteristics	*7 Response time	"High→Low" propagation delay time	Ta=25°C V <sub>CC</sub> =5V, I <sub>F</sub> =4mA R <sub>L</sub> =280Ω	-	1	3	μs
		"Low→High" propagation delay time		-	2	6	
		Fall time		-	0.05	0.5	
		Rise time		-	0.1	0.5	


\*4 I<sub>FHL</sub> represents forward current when output goes from high to low.

\*5 I<sub>FLH</sub> represents forward current when output goes from low to high.


\*6 Hysteresis stands for I<sub>FLH</sub>/I<sub>FHL</sub>.

\*7 Test circuit for response time is shown below.


Fig.1 Test Circuit for Response Time

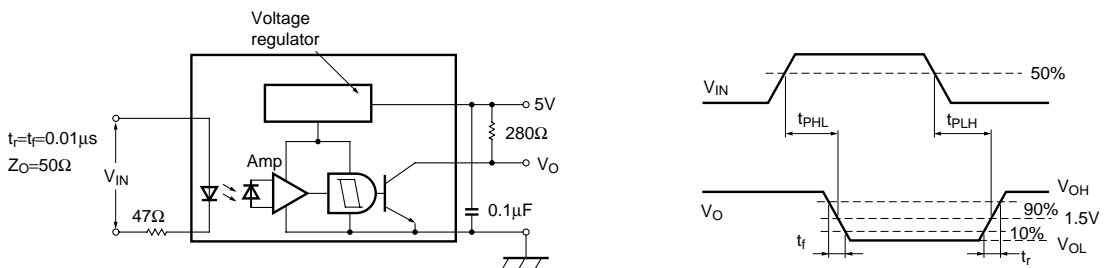


**Fig.2 Forward Current vs. Ambient Temperature**

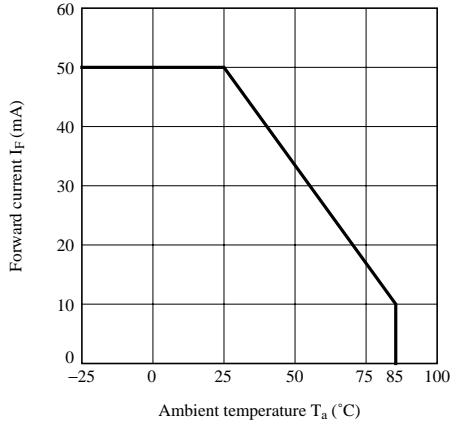


**Fig.3 Power Dissipation vs. Ambient Temperature**

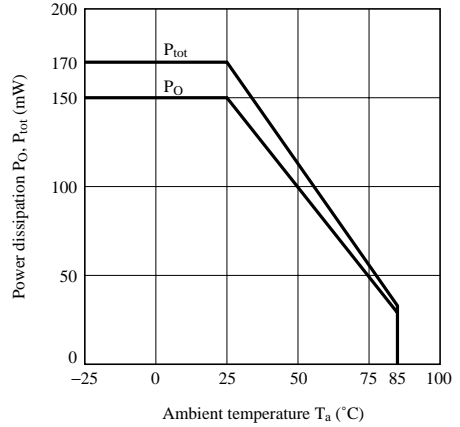


**Fig.4 Forward Current vs. Forward Voltage**

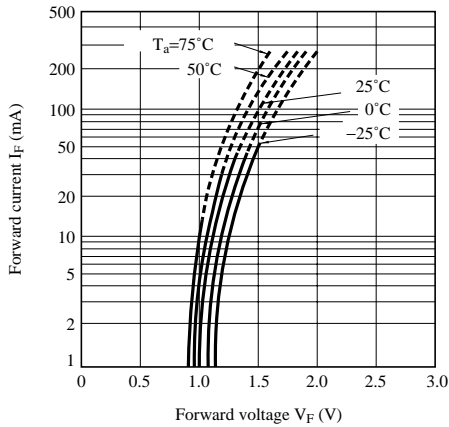


**Fig.5 Relative Threshold Input Current vs. Supply Voltage**

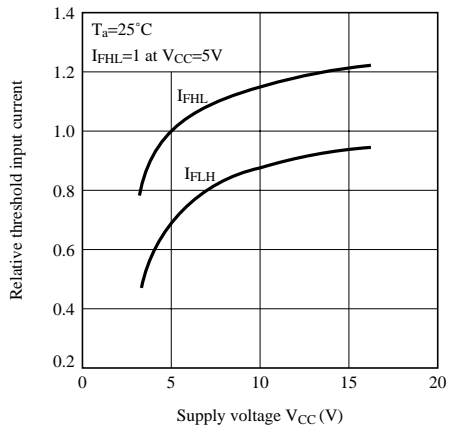

**Fig.6 Relative Threshold Input Current vs. Ambient Temperature**

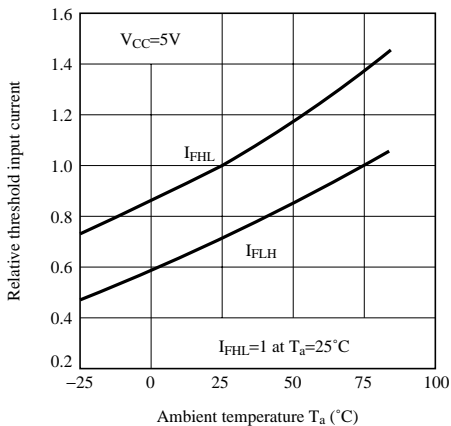


**Fig.7 Low Level Output Voltage vs. Low Level Output Current**

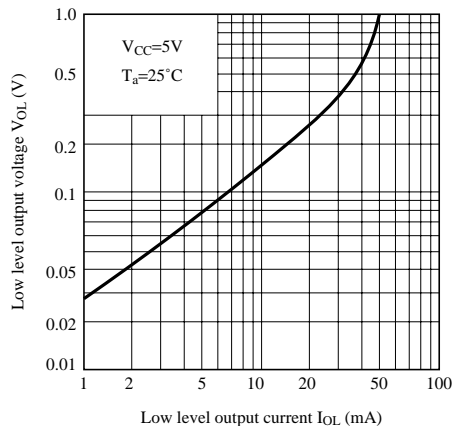





**Fig.8 Low Level Output Voltage vs. Ambient Temperature**

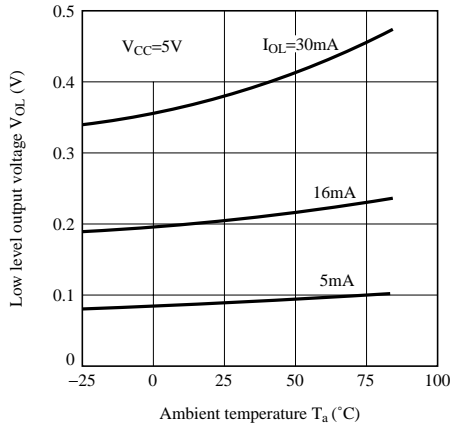


**Fig.9 Supply Current vs. Supply Voltage**

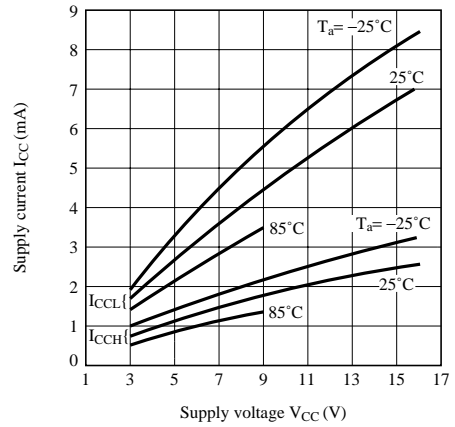

**Fig.10 Propagation Delay Time vs. Forward Current**

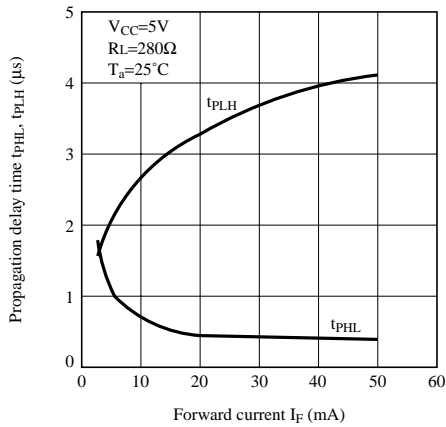

**Fig.11 Rise Time, Fall Time vs. Load Resistance**

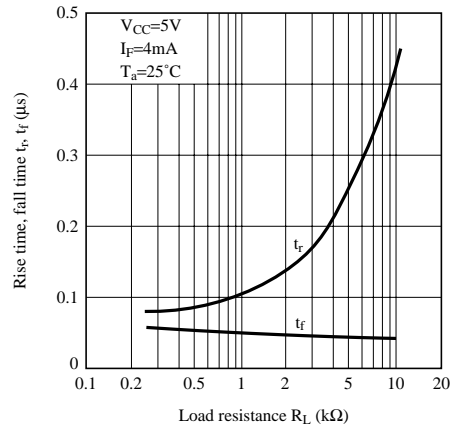

**■ Precautions for Use**

1. It is recommended that a by-pass capacitor of more than 0.01μF is added between  $V_{CC}$  and GND near the device in order to stabilize power supply line.
2. Handle this product the same as with other integrated circuits against static electricity.

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.