


Model:	LP501230	Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)	130
Battery pack specification (电芯组规格)	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)	140	
	Nominal Voltage 标称电压 (V)	3.7	
	Internal impedance 内阻 (≅) (mΩ, AC 1KHz)	450	
	Charge Temp. 充电温度 (°C)	0~45	
	Discharge Temp. 放电温度 (°C)	-20~60	
	Humidity (湿度)	65±20%	
Ambient Conditions (环境温度)	Battery protection Related Value: (相关的电芯保护值)		
	Overdischarge Detection Voltage (V)	3.0±0.1	
	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 0.4 (A)	constant (A) 持续 0.1 (A)	
	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 (A)	constant (A) 持续 (A)	
<small>If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)</small>			

Remark(备注):
 1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电芯表面无划痕、变形、污点及漏液等现象).
 2. Rols compliant(严格按照ROHS要求生产).

		Drawn:	zhuhaoran	Revise No.:	E4-2009
Title	LP501230-PCM-LD/	Checked 1:	Shannon	Projection:	
File NO.	A09152	Checked 2:		Page:	1/1
		Approved:		Scale:	1.5 : 1
		Draw Date:	2014/02/06	Unit:	mm

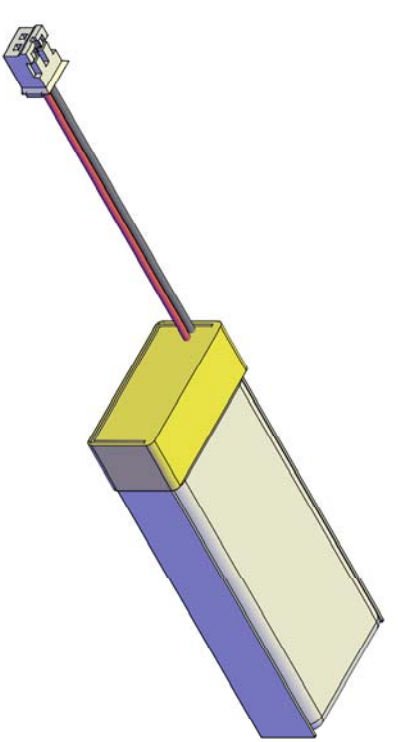

1 2 3 4 5 6