



# SPECIFICATIONS FOR LCD MODULE

MODEL NO.  
BC2004B series  
VER.02

FOR MESSRS:

---

ON DATE OF:

---

APPROVED BY:

---

## History of Version

Version	Contents	Date	Note
01	<b>NEW VERSION</b>	2003/08/16	SPEC.
02	1. Modify 12.1 Drawing	2005/9/16	SPEC

# CONTENTS

1. Numbering System .....	4
2. Precautions in use of LCD Modules .....	5
3. General Specification .....	5
4. Absolute Maximum Rating .....	6
5. Electrical Characteristics .....	6
6. Optical Characteristics .....	7
7. Interface Pin Function .....	9
8. Power supply for LCD Module and LCD operating voltage adjustment .....	10
9. Backlight information .....	11
10. Quality Assurance .....	13
11. Reliability .....	14
12. Appendix (Drawing , EL inverter data , KS0066 controller data) .....	15
12-1 Drawing	
12-2 KS0066 controller data	
12-2.1 Function description	
12-2.2 C.G ROM table. table 2	
12-2.3 Instruction table	
12-2.4 Timing characteristics	
12-2.5 Initializing soft ware of LCM	

# 1. Numbering System

<b>B</b>	<b>C</b>	<b>2004B</b>	<b>B</b>	<b>G</b>	<b>P</b>	<b>L</b>	<b>E</b>	<b>B</b>	<b>xxx</b>
<b>0</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>

<b>0</b>	Brand	Bolymin
<b>1</b>	Module Type	C= character type G= graphic type P= TAB/TCP type O= COG type F= COF type
<b>2</b>	Format	2002=20 characters, 4 lines 12232= 122 x 32 dots
<b>3</b>	Version No.	A type
<b>4</b>	LCD Color	G=STN/gray Y=STN/yellow-green C=color STN B=STN/blue F=FSTN T=TN
<b>5</b>	LCD Type	R=positive/reflective P=positive/transflective M=positive/transmissive N=negative/transmissive
<b>6</b>	Backlight type/color	L=LED array/ yellow-green H=LED edge/white R=LED array/red G=LEDEdge/yellow-green F=RGB D=LED edge/blue E=EL/white B=EL/blue C=CCFL/white Y=LED Bottom/yellow O=LED array/orangr K=LED edge/green
<b>7</b>	CGRAM Font (applied only on character type)	J=English/Japanese Font E=English/European Font C=English/Cyrillic Font H=English/Hebrew Font
<b>8</b>	View Angle/ Operating Temperature	B=Bottom/Normal Temperature H=Bottom/Wide Temperature U=Bottom/Ultra wide Temperature T=Top/Normal Temperature W=Top/Wide Temperature C=9H/Normal Temperature
<b>9</b>	Special Code	3=3 volt logic power supply n=negative voltage for LCD c=cable/connector xxx=to be assigned on data sheet t=temperature compensation for LCD p=touch panel

## 2. Precaution in use of LCD Module

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8) Don't touch the elastmer connector, especially insert a backlight panel (EL or CCFL)

## 3. General Specification

### (1) Mechanical Dimension

Item	Dimension	Unit
Number of Characters	20characters x 4 Lines	-
Module dimension ( L x W x H )	146.0 x 62.5 x 13.6 (Max)—LED B/L 146.0 x 62.5 x 10.1 (Max)—EL or No B/L	mm
View area	123.5 x 43.0	mm
Active area	118.84 x 38.47	mm
Dot size	0.92 x 1.10	mm
Dot pitch	0.98 x 1.16	mm
Character size ( L x W )	4.84 x 9.22	mm
Character pitch ( L x W )	6.0 x 9.75	mm

### (2) Controller IC: **KS0066 (or Equivalent) controller**

### (3) Temperature Range

	Normal	Wide
Operating	0 ~+50	-20 ~+70
Storage	-10 ~+60	-30 ~+80

## 4. Absolute Maximum Ratings

Electrical Absolute Maximum Ratings

(V<sub>SS</sub>=0V, T<sub>a</sub>=25 )

Item	Symbol	Min	Max	Unit
Supply Voltage (Logic)	V <sub>DD</sub> -V <sub>SS</sub>	-0.3	7	V
Supply Voltage (LCD driver)	V <sub>DD</sub> -V <sub>O</sub>	-0.3	13	V
Input Voltage	V <sub>I</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V
Normal Type	TOP	0	+50	
	TSTG	-10	+60	
Wide Temperature Type	Top	-20	+70	
	Tstg	-30	+80	

## 5. Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V <sub>DD</sub> -V <sub>SS</sub>	-	4.5	-	5.5	V
Supply Voltage For LCD  * Wide Temp、 Type	V <sub>DD</sub> -V <sub>O</sub>	* Ta=-20	-	5.0	-	V
		Ta=0	-	4.7	-	V
		Ta=25	-	<b>4.5</b>	-	V
		Ta=50	-	4.2	-	V
		* Ta=+70	-	3.9	-	V
Input High Volt.	V <sub>IH</sub>	-	2.2	-	V <sub>DD</sub>	V
Input Low Volt.	V <sub>IL</sub>	-	-	-	0.6	V
Output High Volt.	V <sub>OH</sub>	-	2.4	-	-	V
Output Low Volt.	V <sub>OL</sub>	-	-	-	0.4	V
Supply Current	I <sub>DD</sub>	V <sub>DD</sub> =5V	-	1.5	3.0	mA
Supply Current (with negative Volt)	I <sub>DD</sub>	V <sub>DD</sub> =5V	-	6.0	10.0	mA

## 6. Optical Characteristics

### a. STN


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V)	CR 2	10	-	45	deg
	(H)	CR 2	-30	-	30	deg
Contrast Ratio	CR	-	-	3	-	-
Response Time 25	T rise	-	-	100	150	ms
	T fall	-	-	150	200	ms

### b. FSTN


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V)	CR 3	10	-	60	deg
	(H)	CR 3	-45	-	45	deg
Contrast Ratio	CR	-	-	5	-	-
Response Time 25	T rise	-	-	100	150	ms
	T fall	-	-	150	200	ms

## 6.1 Definitions

### View Angles

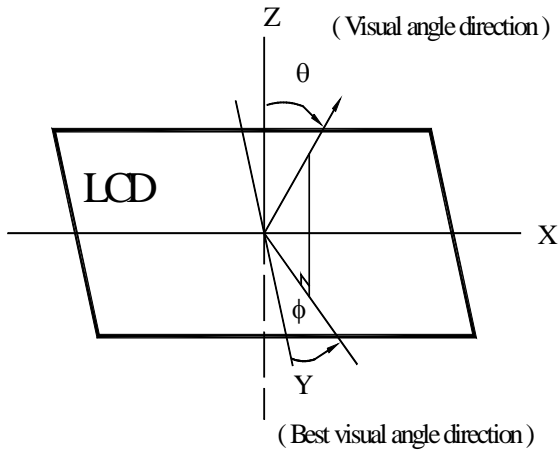

### Contrast Ratio

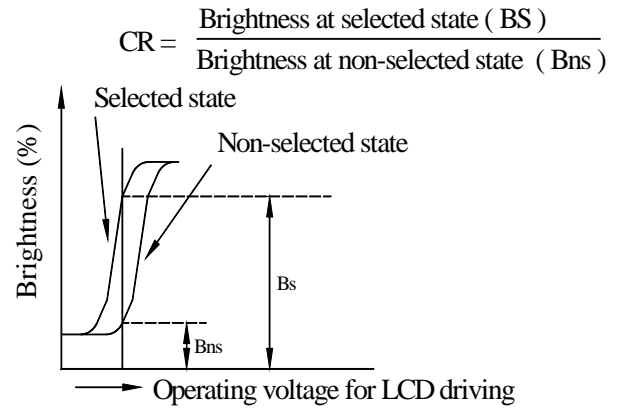


### Response Time

Nonselected Condition

Selected Condition

Nonselected Condition

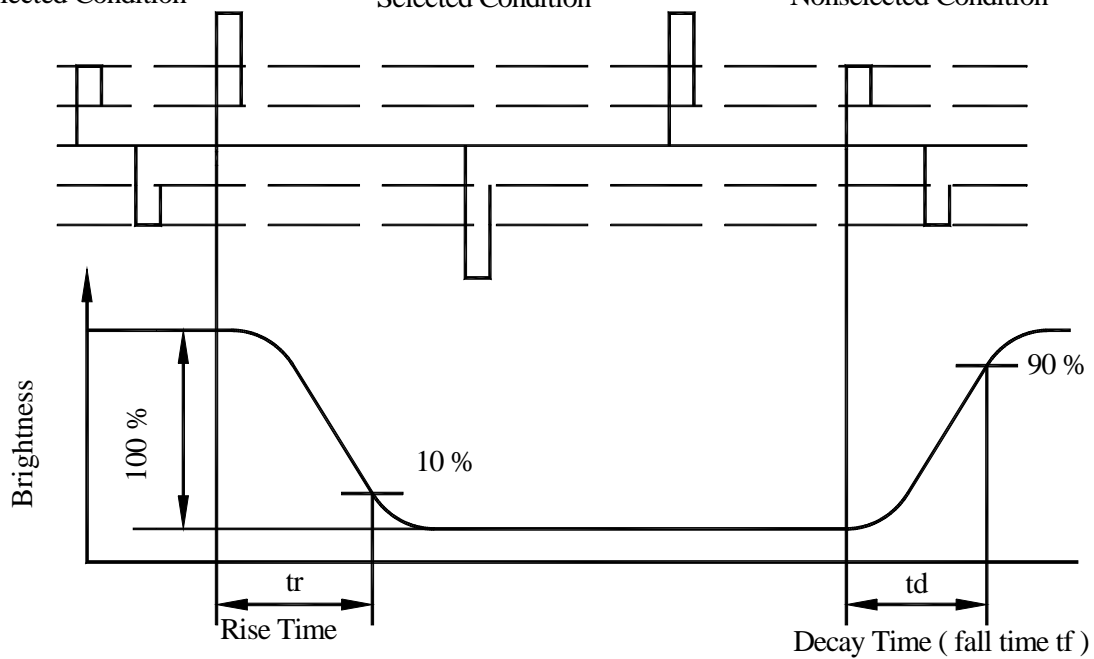




## 7. Interface Pin Function


Pin No.	Symbol	Level	Description
1	Vss	0V	Ground
2	Vdd	5.0V	Supply Voltage for logic ( <b>+3V option</b> )
3	Vo	(Variable)	Operating voltage for LCD
4	RS	H/L	H:DATA, L:Instruction code
5	R/W	H/L	H:Read(MPU Module)L:Write(MPU Module)
6	E	H,H L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	A	-	Power supply for LED backlight ( + )
16	K	-	Power supply for LED backlight (GND )
17	NC/Vee	-	No connection/ Negative voltage output
18	NC	-	No connection/

## 8. Power Supply for LCD Module and LCD Operating Voltage a Adjustment

\* Standart Type

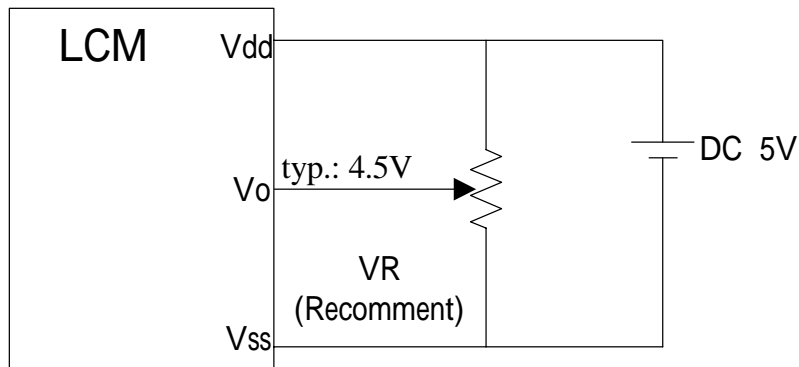


\* (Option) LCM operating on " DC 3V " input with external negative voltage

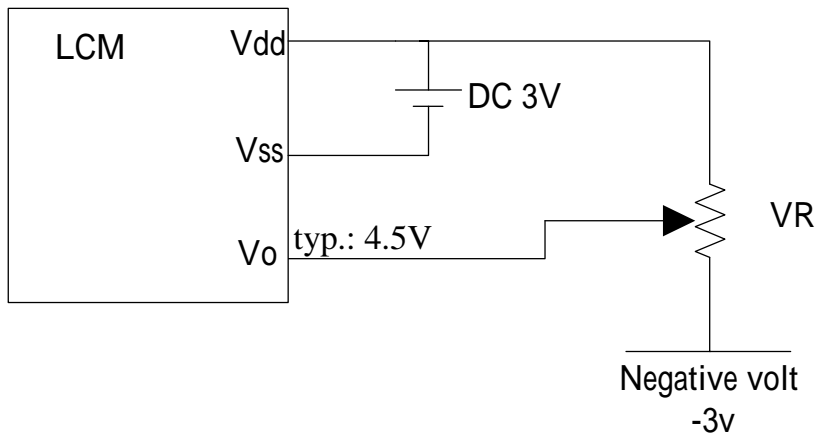

\*

(Option) LCM operating on " DC 3V " input with internal negative voltage

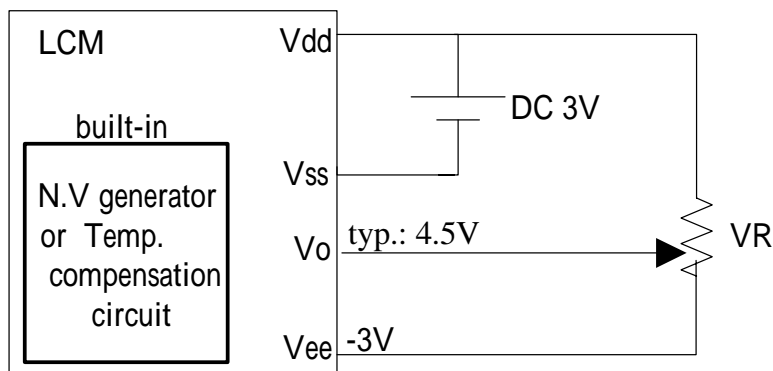

## 9. Backlight Information

### 9.1 Specification

#### (1) LED array / yellow-green

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I <sub>LED</sub>	-	540	-	mA	V=4.2V
Supply Voltage	V	-	4.2	4.3	V	-
Reverse Voltage	V <sub>R</sub>	-	-	8	V	-
Luminous Intensity	I <sub>V</sub>	80	-	-	cd / m <sup>2</sup>	I <sub>LED</sub> =540mA
Wave Length	p	-	573		nm	I <sub>LED</sub> =540mA
Life Time	-	-	100000	-	Hr.	V 4.2
Color	Yellow Green					

#### (2) LED edge / Blue

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I <sub>LED</sub>	-	100	-	mA	V=3.5V
Supply Voltage	V	3.2	3.5	3.6	V	-
Reverse Voltage	V <sub>R</sub>	-	-	8	V	-
Luminous Intensity	I <sub>V</sub>	60	-	-	cd / m <sup>2</sup>	I <sub>LED</sub> =100mA
Wave Length	p	-	573		nm	I <sub>LED</sub> =100mA
Life Time	-	-	100000	-	Hr.	V 3.6
Color	BLUE					

(3) LED edge / White

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I <sub>LED</sub>	-	100	-	mA	V=3.5V
Supply Voltage	V	3.2	3.5	3.6	V	-
Reverse Voltage	V <sub>R</sub>	-	-	8	V	-
Luminous Intensity	I <sub>V</sub>	100	-	-	cd / m <sup>2</sup>	I <sub>LED</sub> =100mA
Wave Length	p	-	573		nm	I <sub>LED</sub> =100mA
Life Time	-	-	20000	-	Hr.	V 3.6
Color	WHITE					


(4) EL white / blue

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Drive Voltage	V <sub>max</sub>	-	110	170	V <sub>rms</sub>	25°C
Drive Wave	F <sub>max</sub>	-	400	1000	Hz	25°C
Brightness	-	20	-	-	cd/m <sup>2</sup>	110V/400Hz
Power Consumption	-	-	48.3	-	mW	110V/400Hz
Chromatism	X	-	0.3019 (white)	-	-	110V/400Hz
			0.330 (blue)			
	Y	-	0.3929 (white)	-	-	110V/400Hz
			0.365 (blue)			
Life time	5000			hour	110V/400Hz	
Color	White / Blue			-	Light on 110V/400Hz	

## 9.2 Backlight driving methods


- a. LED B/L drive from pin15 (LED+) pin16 (LED-) array / yellow-green

### LCM

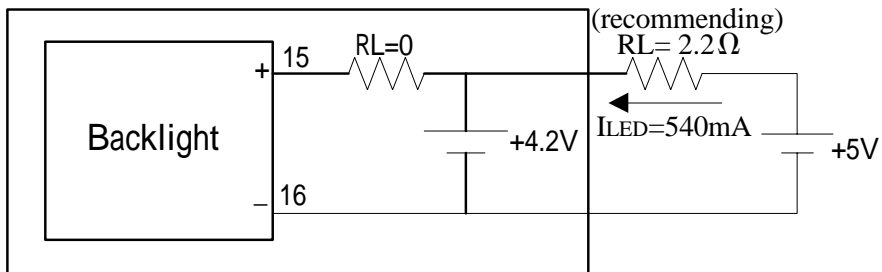


edge/ white (blue)

### LCM

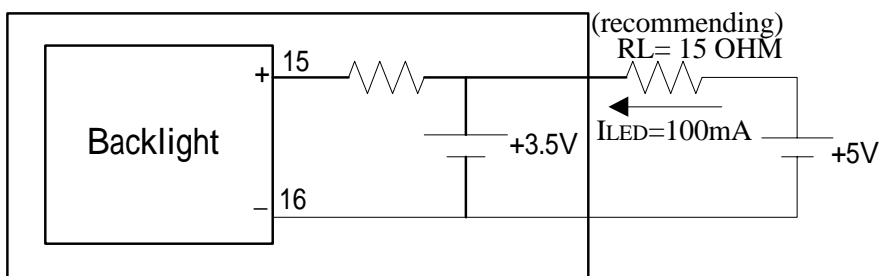


- b. LED B/L drive from A.K directly array / yellow-green

### LCM

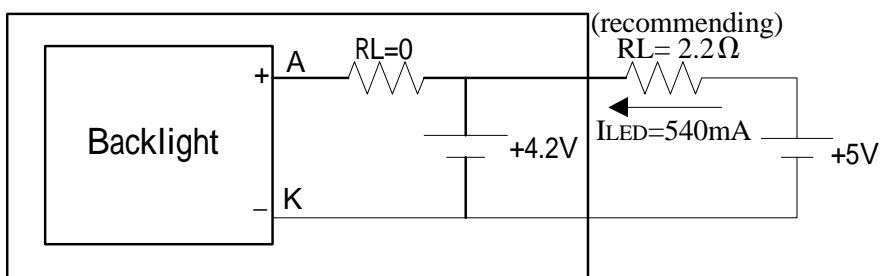


c. \* (Option) LED B/L drive from pin1 (Vss) pin2 (Vdd)

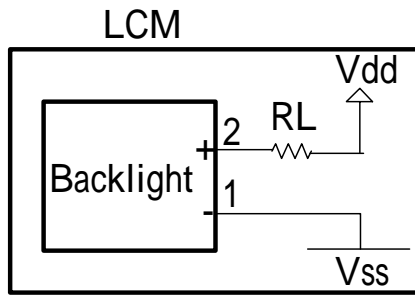

- (1) Jump 1,2 Short
- (2) Current Resistor required on RL
- (3) Jump 15,16 open
- (4) To be sure of enough current supply for both Vdd + LED B/L

d. EL B/L drive from A.K directly

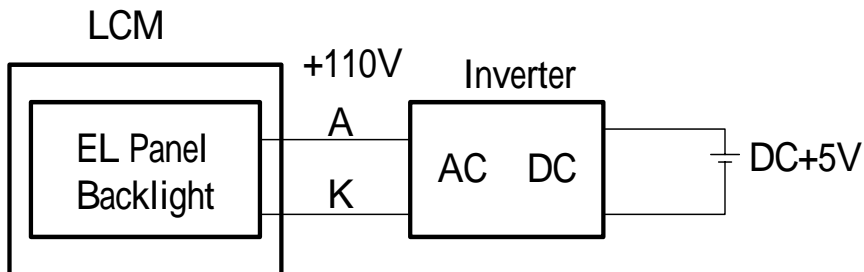


## 10. Quality Assurance

### Screen Cosmetic Criteria

Item	Defect	Judgment Criterion	Partition																				
1	Spots	<p>A)Clear</p> <table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>d ≤ 0.1</td> <td>Disregard</td> </tr> <tr> <td>0.1 &lt; d ≤ 0.2</td> <td>6</td> </tr> <tr> <td>0.2 &lt; d ≤ 0.3</td> <td>2</td> </tr> <tr> <td>0.3 &lt; d</td> <td>0</td> </tr> </tbody> </table> <p>Note: Including pin holes and defective dots which must be within one pixel size.</p> <p>B)Unclear</p> <table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>d ≤ 0.2</td> <td>Disregard</td> </tr> <tr> <td>0.2 &lt; d ≤ 0.5</td> <td>6</td> </tr> <tr> <td>0.5 &lt; d ≤ 0.7</td> <td>2</td> </tr> <tr> <td>0.7 &lt; d</td> <td>0</td> </tr> </tbody> </table>	Size: d mm	Acceptable Qty in active area	d ≤ 0.1	Disregard	0.1 < d ≤ 0.2	6	0.2 < d ≤ 0.3	2	0.3 < d	0	Size: d mm	Acceptable Qty in active area	d ≤ 0.2	Disregard	0.2 < d ≤ 0.5	6	0.5 < d ≤ 0.7	2	0.7 < d	0	Minor
Size: d mm	Acceptable Qty in active area																						
d ≤ 0.1	Disregard																						
0.1 < d ≤ 0.2	6																						
0.2 < d ≤ 0.3	2																						
0.3 < d	0																						
Size: d mm	Acceptable Qty in active area																						
d ≤ 0.2	Disregard																						
0.2 < d ≤ 0.5	6																						
0.5 < d ≤ 0.7	2																						
0.7 < d	0																						
2	Bubbles in Polarize	<table border="1"> <thead> <tr> <th>Size: d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>d ≤ 0.3</td> <td>Disregard</td> </tr> <tr> <td>0.3 &lt; d ≤ 1.0</td> <td>3</td> </tr> <tr> <td>1.0 &lt; d ≤ 1.5</td> <td>1</td> </tr> <tr> <td>1.5 &lt; d</td> <td>0</td> </tr> </tbody> </table>	Size: d mm	Acceptable Qty in active area	d ≤ 0.3	Disregard	0.3 < d ≤ 1.0	3	1.0 < d ≤ 1.5	1	1.5 < d	0	Minor										
Size: d mm	Acceptable Qty in active area																						
d ≤ 0.3	Disregard																						
0.3 < d ≤ 1.0	3																						
1.0 < d ≤ 1.5	1																						
1.5 < d	0																						
3	Scratch	In accordance with spots cosmetic criteria. When the light reflects on the panel surface, the scratches are not to be remarkable.	Minor																				
4	Allowable Density	Above defects should be separated more than 30mm each other.	Minor																				
5	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-light type should be judged with back-light on state only.	Minor																				

## 11. Reliability

### Content of Reliability Test

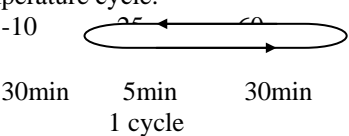Environmental Test			
Test Item	Content of Test	Test Condition	Applicable Standard
High Temperature storage	Endurance test applying the high storage temperature for a long time.	60 200hrs	-
Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-10 200hrs	-
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	50 200hrs	-
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	0 200hrs	-
High Temperature/ Humidity Storage	Endurance test applying the high temperature and high humidity storage for a long time.	60 ,90%RH 96hrs	-
High Temperature/ Humidity Operation	Endurance test applying the electric stress (Voltage & Current) and temperature / humidity stress to the element for a long time.	50 ,90%RH 96hrs	-
Temperature Cycle	Endurance test applying the low and high temperature cycle. 	-10 /60 10 cycles	-
Mechanical Test			
Vibration test	Endurance test applying the vibration during transportation and using.	10~22Hz 1.5mmp-p 22~500Hz 1.5G Total 0.5hrs	-
Shock test	Constructional and mechanical endurance test applying the shock during transportation.	50G Half sign wave 11 msedc 3 times of each direction	-
Atmospheric pressure test	Endurance test applying the atmospheric pressure during transportation by air.	115mbar 40hrs	-
Others			
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5k CS=100pF 1 time	-



\*\*\*Supply voltage for logic system=5V. Supply voltage for LCD system =Operating voltage at 25



## 12. Appendix ( Drawing , KS0066 controller data)

### 12-1 Drawing

PIN NO.	SYMBOL
1	V <sub>SS</sub>
2	V <sub>DD</sub>
3	V <sub>O</sub>
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K
17	V <sub>EE</sub>
18	NC

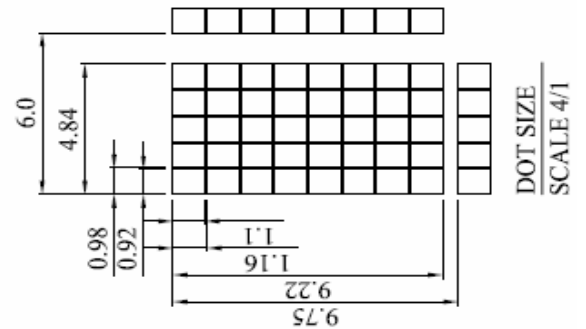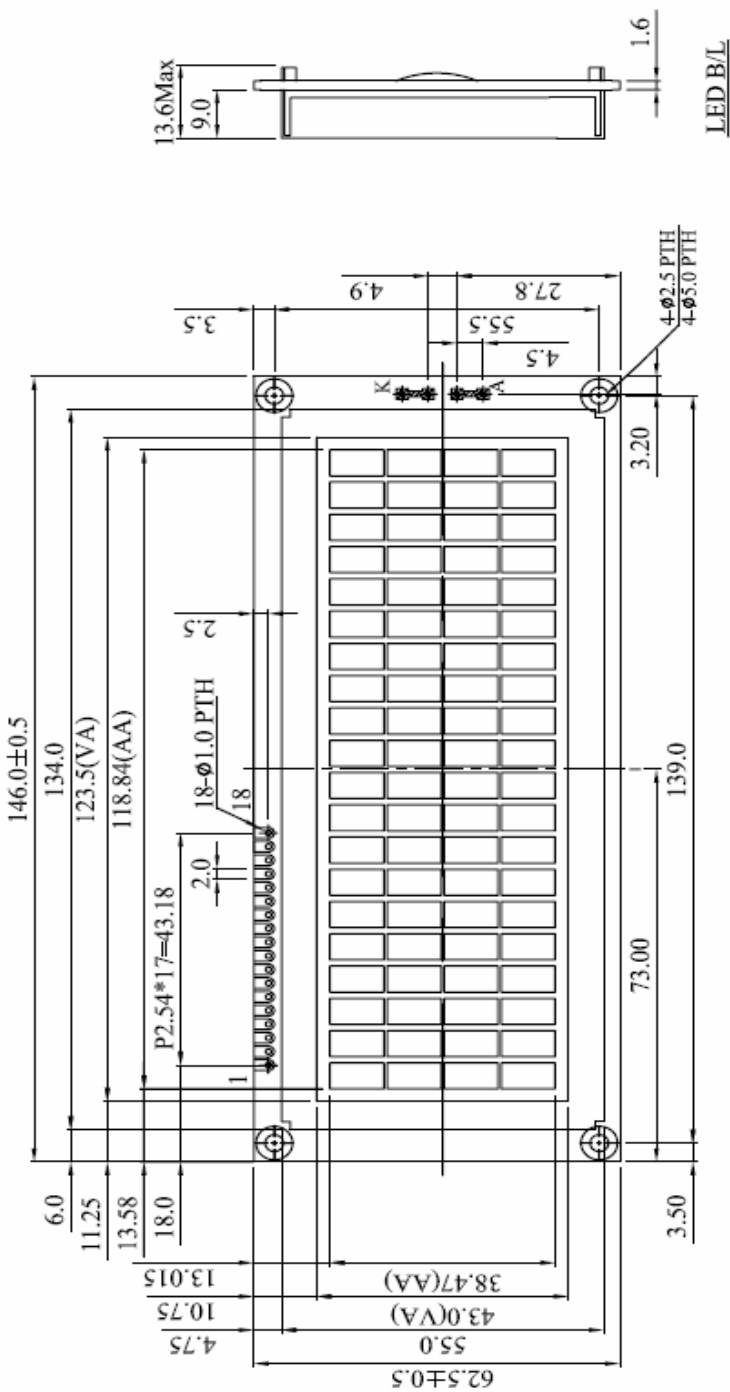

The non-specified tolerance of dimension is  $\pm 0.3$  mm .

## 12-2 KS0066 controller data

### 12-2.1 Function description

The LCD display Module is built in a LSI controller, the controller has two 8-bit registers, an instruction register (IR) and a data register (DR).

The IR stores instruction codes, such as display clear and cursor shift, and address information for display data RAM (DDRAM) and character generator (CGRAM). The IR can only be written from the MPU. The DR temporarily stores data to be written or read from DDRAM or CGRAM. When address information is written into the IR, then data is stored into the DR from DDRAM or CGRAM. By the register selector (RS) signal, these two registers can be selected.

RS	R/W	Operation
0	0	IR write as an internal operation (display clear, etc.)
0	1	Read busy flag (DB7) and address counter (DB0 to DB7)
1	0	Write data to DDRAM or CGRAM (DR to DDRAM or CGRAM)
1	1	Read data from DDRAM or CGRAM (DDRAM or CGRAM to DR)

#### Busy Flag (BF)


When the busy flag is 1, the controller LSI is in the internal operation mode, and the next instruction will not be accepted. When RS=0 and R/W=1, the busy flag is output to DB7. The next instruction must be written after ensuring that the busy flag is 0.

#### Address Counter (AC)

The address counter (AC) assigns addresses to both DDRAM and CGRAM

#### Display Data RAM (DDRAM)

This DDRAM is used to store the display data represented in 8-bit character codes. Its extended capacity is 80×8 bits or 80 characters. Below figure is the relationship between DDRAM addresses and positions on the liquid crystal display.

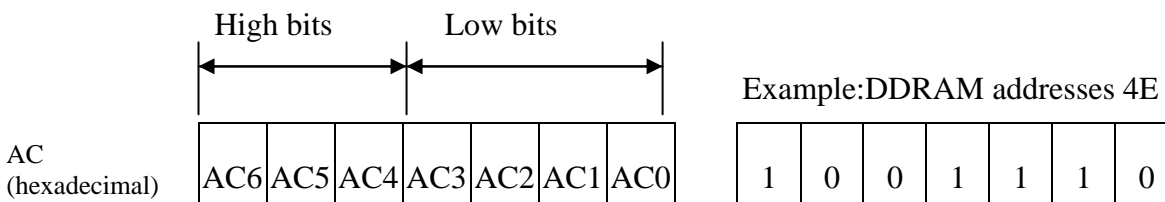

## DDRAM Address

Display position DDRAM address

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F

Example: 2-Line by 16-Character Display

## Character Generator ROM (CGROM)

The CGROM generate 5×8 dot or 5×10 dot character patterns from 8-bit character codes. See Table 2.

## Character Generator RAM (CGRAM)

In CGRAM, the user can rewrite character by program. For 5×8 dots, eight character patterns can be written, and for 5×10 dots, four character patterns can be written.

Write into DDRAM the character code at the addresses shown as the left column of table 1. To show the character patterns stored in CGRAM.

## Relationship between CGRAM Addresses, Character Codes (DDRAM) and Character Patterns (CGRAM Data)

For 5 \* 8 dot character patterns

Character Codes ( DDRAM data )		CGRAM Address		Character Patterns ( CGRAM data )	
7 6 5 4 3 2 1 0		5 4 3 2 1 0		7 6 5 4 3 2 1 0	
High	Low	High	Low	High	Low
0 0 0 0 * 0 0 0		0 0 0	0 0 0	* * *	0 0 0 0
			0 0 1	* * *	0 0 0 0
			0 1 0	* * *	0 0 0 0
			0 1 1	* * *	0 0 0 0
			1 0 0	* * *	0 0 0 0
			1 0 1	* * *	0 0 0 0
			1 1 0	* * *	0 0 0 0
			1 1 1	* * *	0 0 0 0
			0 0 0	* * *	0 0 0 0
			0 0 1	* * *	0 0 0 0
			0 1 0	* * *	0 0 0 0
			0 1 1	* * *	0 0 0 0
0 0 0 0 * 0 0 1		0 0 1	1 0 0	* * *	0 0 0 0
			1 0 1	* * *	0 0 0 0
			1 1 0	* * *	0 0 0 0
			1 1 1	* * *	0 0 0 0
			0 0 0	* * *	
			0 0 1	* * *	
0 0 0 0 * 1 1 1		1 1 1	1 0 0	* * *	
			1 0 1	* * *	
			1 1 0	* * *	
			1 1 1	* * *	

Character pattern( 1 )  
 Cursor pattern  
 Character pattern( 2 )  
 Cursor pattern

For 5 \* 10 dot character patterns

Character Codes ( DDRAM data )		CGRAM Address		Character Patterns ( CGRAM data )	
7 6 5 4 3 2 1 0		5 4 3 2 1 0		7 6 5 4 3 2 1 0	
High	Low	High	Low	High	Low
0 0 0 0 * 0 0 0		0 0	0 0 0 0	* * *	0 0 0 0 0 0
			0 0 0 1	* * *	0 0 0 0 0 0
			0 0 1 0	* * *	0 0 0 0 0 0
			0 0 1 1	* * *	0 0 0 0 0 0
			0 1 0 0	* * *	0 0 0 0 0 0
			0 1 0 1	* * *	0 0 0 0 0 0
			0 1 1 0	* * *	0 0 0 0 0 0
			0 1 1 1	* * *	0 0 0 0 0 0
			1 0 0 0	* * *	0 0 0 0 0 0
			1 0 0 1	* * *	0 0 0 0 0 0
			1 0 1 0	* * *	0 0 0 0 0 0
			1 1 1 1	* * *	* * * * * *

Character pattern  
 Cursor pattern

■ : " High "

12-2.2 C.G ROM table. table 2

Code J: English – Japanese Font

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)			0	1	2	3	4				5	6	7	8	9
LLLH	(2)		!	!	!	!	!	!			!	!	!	!	!	!
LLHL	(3)		"	"	"	"	"	"			"	"	"	"	"	"
LLHH	(4)		#	#	#	#	#	#			#	#	#	#	#	#
LHLL	(5)		\$	\$	\$	\$	\$	\$			\$	\$	\$	\$	\$	\$
LHLH	(6)		%	%	%	%	%	%			%	%	%	%	%	%
LHHL	(7)		&	&	&	&	&	&			&	&	&	&	&	&
LHHH	(8)		'	'	'	'	'	'			'	'	'	'	'	'
HLLL	(1)		(	(	(	(	(	(			(	(	(	(	(	(
HLLH	(2)		)	)	)	)	)	)			)	)	)	)	)	)
HLHL	(3)		*	*	*	*	*	*			*	*	*	*	*	*
HLHH	(4)		+	+	+	+	+	+			+	+	+	+	+	+
HHLL	(5)		,	,	,	,	,	,			,	,	,	,	,	,
HHLH	(6)		-	-	-	-	-	-			-	-	-	-	-	-
HHHL	(7)		.	.	.	.	.	.			.	.	.	.	.	.
HHHH	(8)		/	/	/	/	/	/			/	/	/	/	/	/

# Code E: English - European Fon

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)															
LLLH	CG RAM (2)															
LLHL	CG RAM (3)															
LLHH	CG RAM (4)															
LHLL	CG RAM (5)															
LHLH	CG RAM (6)															
LHHL	CG RAM (7)															
LHHH	CG RAM (8)															
HLLL	CG RAM (1)															
HLLH	CG RAM (2)															
HLHL	CG RAM (3)															
HLHH	CG RAM (4)															
HHLL	CG RAM (5)															
HHLH	CG RAM (6)															
HHHL	CG RAM (7)															
HHHH	CG RAM (8)															

Code C: English - Cyrillic Font

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)			0	1	2	3	4			5	6	7	8	9	0
LLLH	CG RAM (2)	!		1	2	3	4	5			6	7	8	9	0	1
LLHL	CG RAM (3)	"		2	3	4	5	6			7	8	9	0	1	2
LLHH	CG RAM (4)	#		3	4	5	6	7			8	9	0	1	2	3
LHLL	CG RAM (5)	\$		4	5	6	7	8			9	0	1	2	3	4
LHLH	CG RAM (6)	%		5	6	7	8	9			0	1	2	3	4	5
LHHL	CG RAM (7)	&		6	7	8	9	0			1	2	3	4	5	6
LHHH	CG RAM (8)	'		7	8	9	0	1			2	3	4	5	6	7
HLLL	CG RAM (1)	(		8	9	0	1	2			3	4	5	6	7	8
HLLH	CG RAM (2)	)		9	0	1	2	3			4	5	6	7	8	9
HLHL	CG RAM (3)	*		0	1	2	3	4			5	6	7	8	9	0
HLHH	CG RAM (4)	+		1	2	3	4	5			6	7	8	9	0	1
HHLL	CG RAM (5)	,		2	3	4	5	6			7	8	9	0	1	2
HHLH	CG RAM (6)	-		3	4	5	6	7			8	9	0	1	2	3
HHHL	CG RAM (7)	.		4	5	6	7	8			9	0	1	2	3	4
HHHH	CG RAM (8)	/		5	6	7	8	9			0	1	2	3	4	5

### 12-2.3 Instruction table


Instruction	Instruction Code										Description	Execution time (fosc=270Khz)
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "00H" to DDRAM and set DDRAM address to "00H" from AC	1.53ms
Return Home	0	0	0	0	0	0	0	0	1	-	Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.53ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	39 μ s
Display ON/OFF Control	0	0	0	0	0	0	1	D	C	B	Set display (D), cursor (C), and blinking of cursor (B) on/off control bit.	39 μ s
Cursor or Display Shift	0	0	0	0	0	1	S/C	R/L	-	-	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	39 μ s
Function Set	0	0	0	0	1	DL	N	F	-	-	Set interface data length (DL:8-bit/4-bit), numbers of display line (N:2-line/1-line)and, display font type (F:5×11 dots/5×8 dots)	39 μ s
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	39 μ s
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in address counter.	39 μ s
Read Busy Flag and Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μ s
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	43 μ s
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	43 μ s

- " : don't care



## 12-2.4 Timing characteristics


### 12-2.4.1 Write Operation

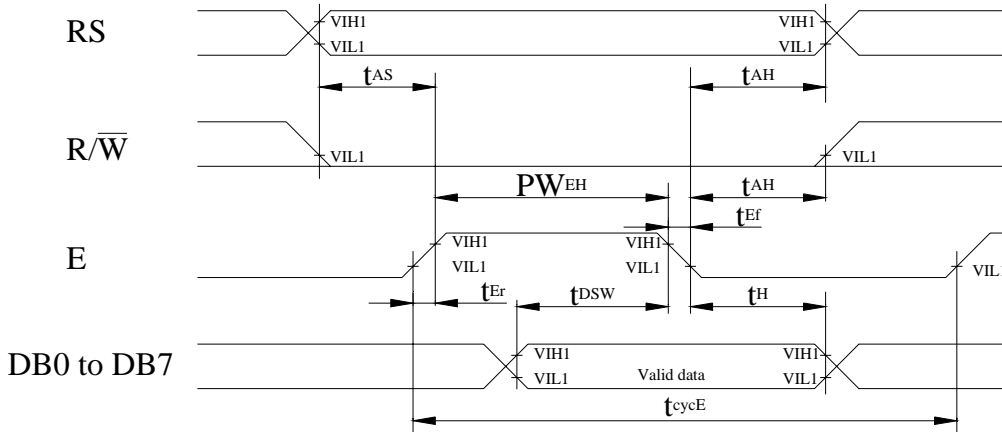

$T_a=25$  ,  $V_{dd}=5.0\pm 0.5V$

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	$t_{cycE}$	500	-	-	ns
Enable pulse width (high level)	$PW_{EH}$	230	-	-	ns
Enable rise/fall time	$t_{Er}, t_{Ef}$	-	-	20	ns
Address set-up time (RS, R/W to E)	$t_{AS}$	40	-	-	ns
Address hold time	$t_{AH}$	10	-	-	ns
Data set-up time	$t_{DSW}$	80	-	-	ns
Data hold time	$t_H$	10	-	-	ns

### 12-2.4.2 Read Operation

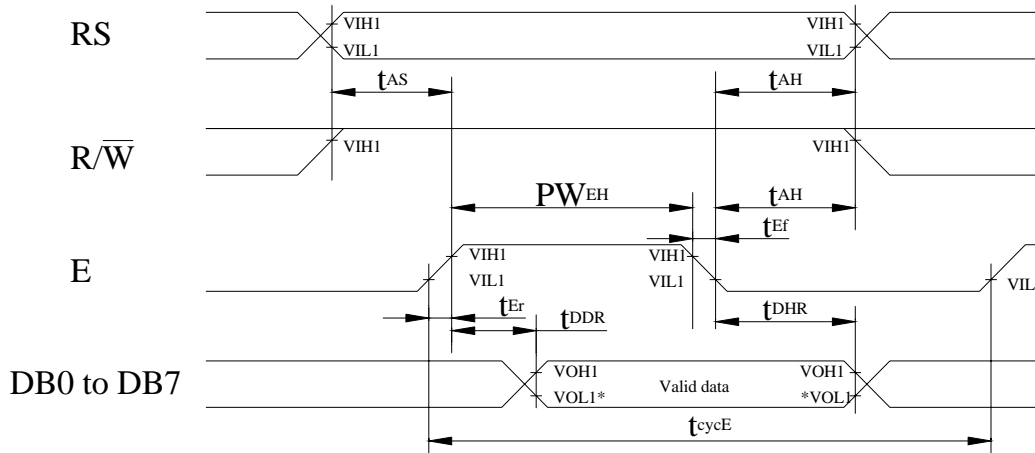

NOTE: \*VOL1 is assumed to be 0.8V at 2 MHz operation.


T<sub>a</sub>=25 °C, V<sub>dd</sub>=5.0±0.5V

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t <sub>cycE</sub>	500	-	-	ns
Enable pulse width (high level)	PW <sub>EH</sub>	230	-	-	ns
Enable rise/fall time	t <sub>Er</sub> , t <sub>Ef</sub>	-	-	20	ns
Address set-up time (RS, R/W to E)	t <sub>AS</sub>	40	-	-	ns
Address hold time	t <sub>AH</sub>	10	-	-	ns
Data delay time	t <sub>DDR</sub>	-	-	160	ns
Data hold time	t <sub>DHR</sub>	5	-	-	ns


## 12-2.5 Initializing soft ware of LCM

### 12-2.5.1 8-bit interface

#### 12-2.5.2 4-bit interface

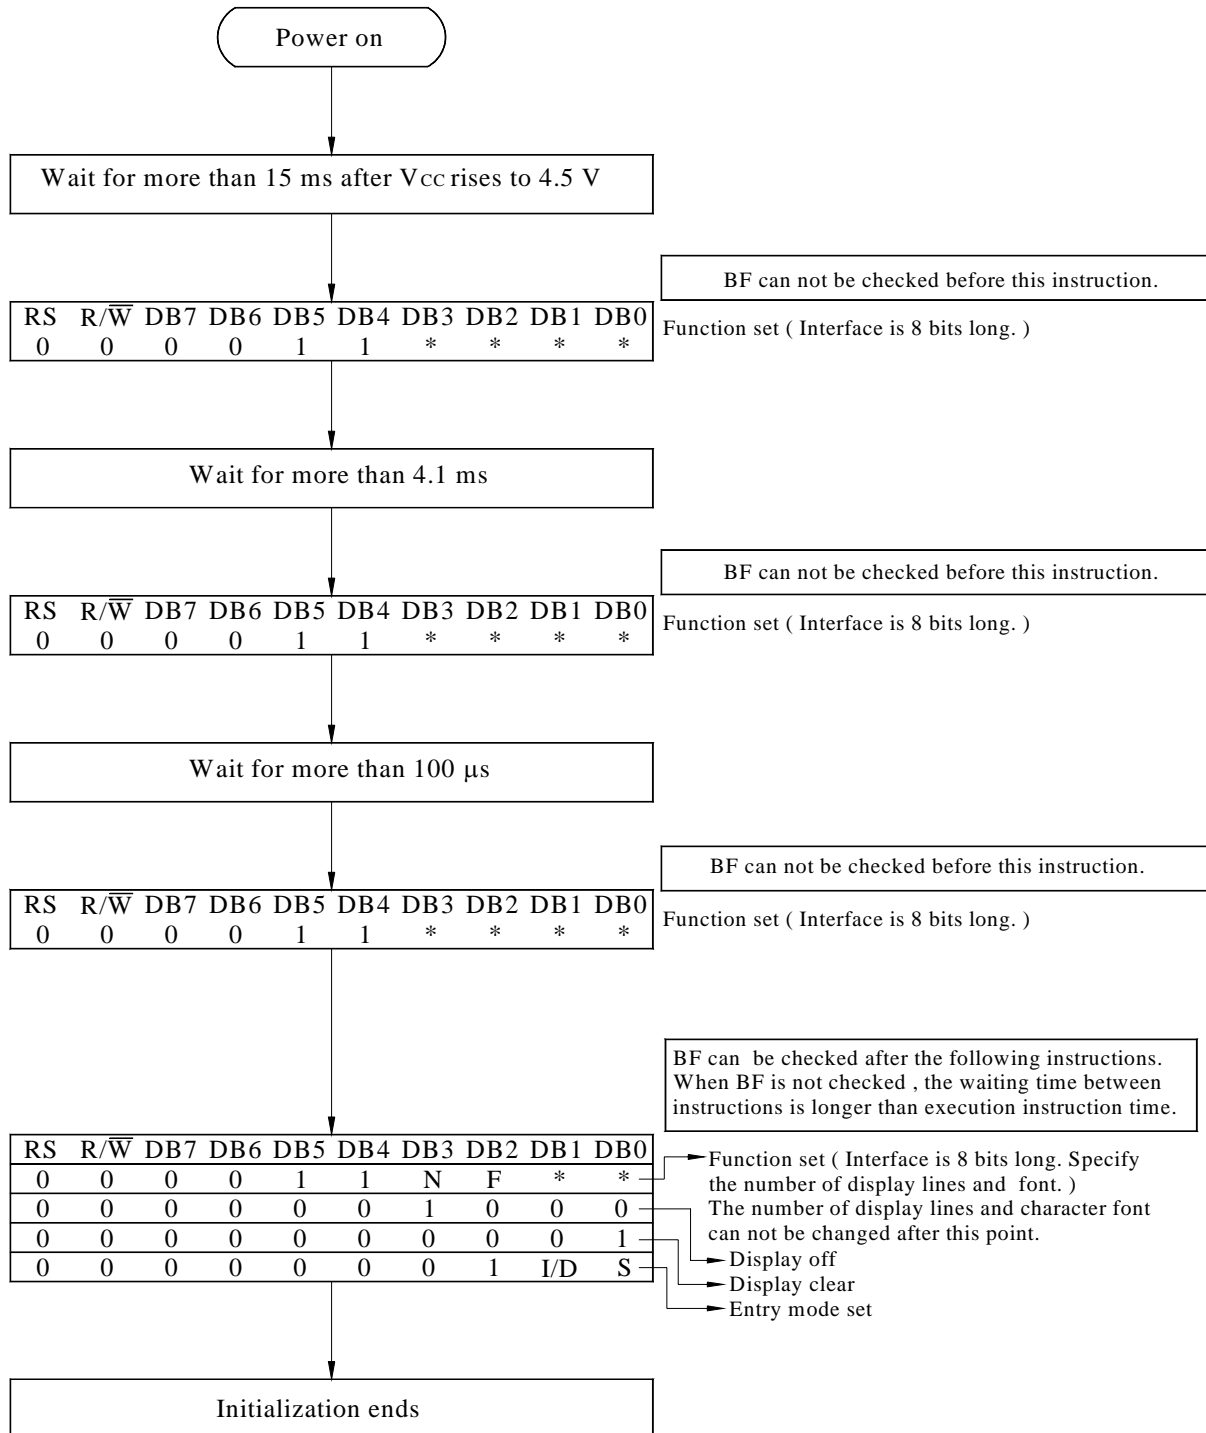

8-Bit Ineterface

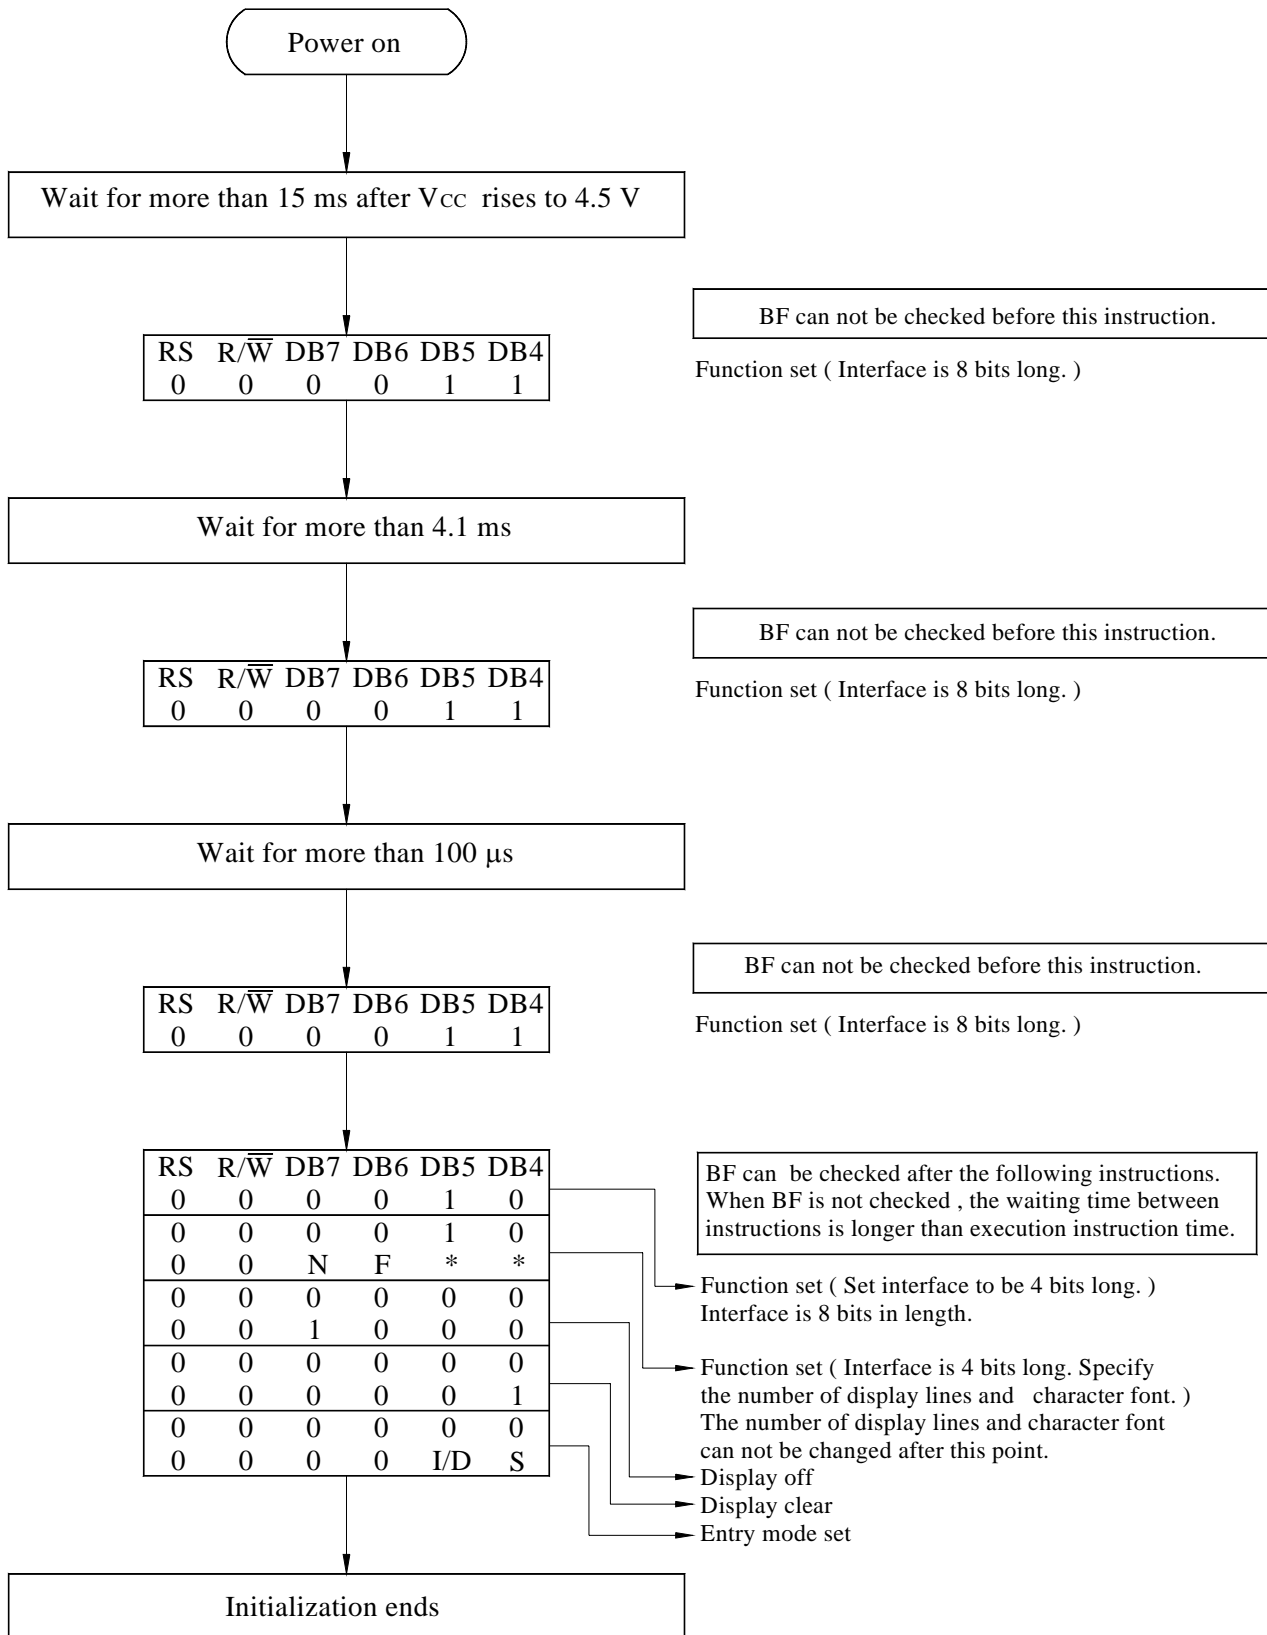

4-Bit Ineterface