



# 100 MHz 2[4] Channel Digital Oscilloscope HMO1022 [HMO1024]


HMO1024

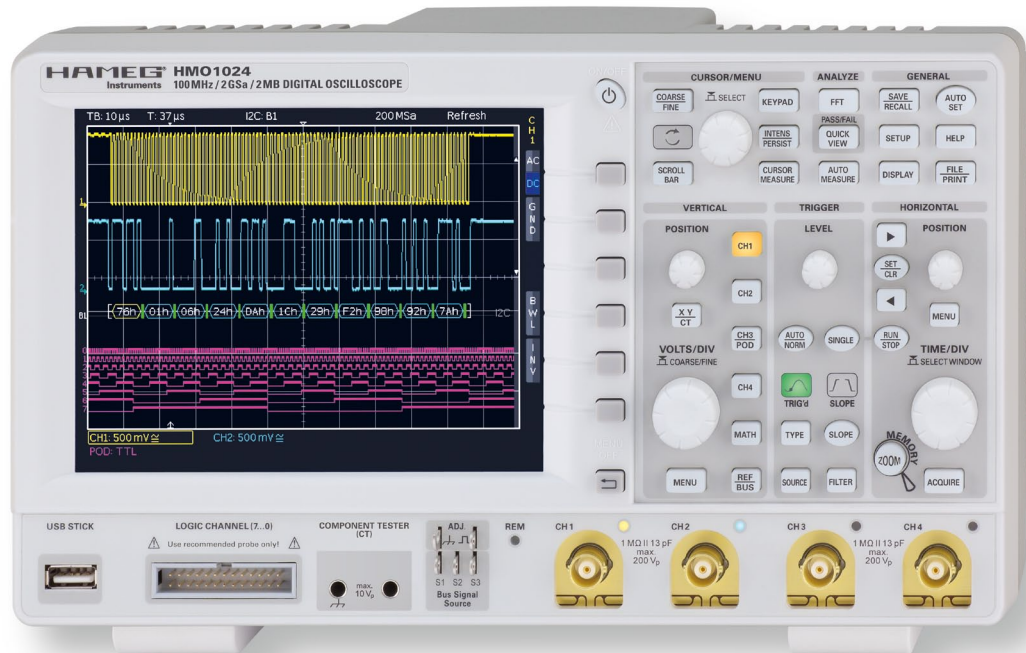

Mask Test



Passive Probe 1000:1  
HZ020



AC/DC Current Probe  
100/1000A HZ051



- ✓ 2GSa/s Real Time, Low Noise Flash A/D Converter (Reference Class)
- ✓ 2MPts Memory, Memory Zoom up to 50,000:1
- ✓ MSO (Mixed Signal Opt. H03508) with 8 Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode, I<sup>2</sup>C, SPI, UART/RS-232 (Opt. H0010, H0011)
- ✓ 8 User definable Markers for easy Navigation
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div.
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulsewidth, Logic, Delayed, Event
- ✓ Component tester, 6 Digit Counter, Automeasurement, Formula Editor, Ratiocursor, FFT for Spectral Analysis
- ✓ Crisp 16.5cm (6.5") TFT VGA Display, DVI Output
- ✓ Lowest Noise Fan
- ✓ 3 x USB for Mass Storage, Printer and Remote Control optional IEEE-488 (GPIB) or Ethernet/USB

# 100 MHz 2 [4] Channel Digital Oscilloscope HMO1022 [HMO1024]

All data valid at 23°C after 30 minute warm-up.

Display	
Display:	16.5 cm [6.5"] VGA Color TFT
Resolution:	640 x 480 Pixel
Backlight:	LED 400 cd/m <sup>2</sup>
Display area for curves:	
without menu	400 x 600 Pixel [8 x 12 div.]
with menu	400 x 500 Pixel [8 x 10 div.]
Color depth:	256 colors
Intensity steps per channel:	0...31
Vertical System	
Channels:	
DSO mode	CH 1, CH 2 [CH 1...CH 4]
MSO mode	CH 1, CH 2, LCH 0...7 [logic channels] [CH 1, CH 2, LCH 0...7, CH 4] with Option HO3508
Auxiliary input:	Frontside [Rear side]
Function	Ext. Trigger
Impedance	1 MΩ    13 pF ±2 pF
Coupling	DC, AC
Max. input voltage	100V (DC + peak AC)
XYZ-mode:	All analog channels on individual choice
Invert:	CH 1, CH 2 [CH 1...CH 4]
Y-bandwidth [-3 dB]:	100 MHz [5 mV...10V]/div. 20 MHz [1 mV, 2 mV]/div.
Lower AC bandwidth:	2 Hz
Bandwidth limiter [switchable]:	approx. 20 MHz
Rise time [calculated]:	<3.5 ns
DC gain accuracy	2%
Input sensitivity:	13 calibrated steps
CH 1, CH 2 [CH 1...CH 4]	1 mV/div...10V/div. [1-2-5 Sequence]
Variable	Between calibrated steps
Inputs CH 1, CH 2 [CH 1...CH 4]:	
Impedance	1 MΩ    15 pF ±2 pF
Coupling	DC, AC, GND
Max. input voltage	200V (DC + peak AC)
Measuring circuits:	Measuring Category I [CAT I]
Position range	±10 Divs
Logic channels	With Option HO3508
Select. switching thresholds	TTL, CMOS, ECL, 2x User -2...+8V
Impedance	100 kΩ    <4 pF
Coupling	DC
Max. input voltage	40V (DC + peak AC)
Triggering	
Analog channels:	
Automatic:	Linking of peakdetection and triggerlevel
Min. signal height	0.8 div.; 0.5 div. typ.
Frequency range	5 Hz...150 MHz
Level control range	From peak- to peak+
Normal (without peak):	
Min. signal height	0.8 div.; 0.5 div. typ.
Frequency range	0...150 MHz
Level control range	-10...+10 div.
Operating modes:	Slope/Video/Logic/Pulses/Busses [optional]
Slope:	Rising, falling, both
Sources:	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
Coupling:	AC: 5 Hz...150 MHz DC: 0...150 MHz HF: 30 kHz...150 MHz LF: 0...5 kHz Noise rejection: switchable
Video:	
Standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
Fields	Field 1, field 2, both
Line	All, selectable line number
Sync. Impulse	Positive, negative
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
Logic:	AND, OR, TRUE, FALSE
Sources:	LCH 0...7
State	LCH 0...7 X, H, L
Pulses:	Positive, negative
Modes	equal, unequal, less than, greater than, within/without a range

Range	min. 16 ns, max. 268.434 ms, resolution from 16 ns until 2 μs
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4]
Indicator for trigger action:	LED
Ext. Trigger via:	Auxiliary input 0.3V...10V <sub>pp</sub>
2nd Trigger:	
Slope:	Rising, falling, both
Min. signal height	0.8 div.; 0.5 div. typ.
Frequency range	0...100 MHz
Level control range	-10...+10 div.
Operating modes:	
after time	32 ns...536 ms
after incidence	1...2 <sup>16</sup>
Busses [Opt. H0010]:	I <sup>2</sup> C/SPI/UART/RS-232
Sources:	CH 1, CH 2, Ext., LCH 0...7 [CH 1...CH 4, Ext., LCH 0...7]
Busses [Opt. H0011]:	I <sup>2</sup> C/SPI/UART/RS-232
Sources:	CH 1, CH 2, Ext. [CH 1...CH 4, Ext.]
Format	hexadecimal, binary
I <sup>2</sup> C	Trigger on Start, Stop, Restart, NACK, Address (7 or 10 Bit), Data, Address and Data, up to 5 Mb/s
SPI	up to 32 Bit Data, Chip select (CS) pos. or neg., without CS, up to 12.5 Mb/s
UART/RS-232	up to 8 Bit Data, up to 30 Mb/s

Horizontal System	
Domain representation:	Time, Frequency (FFT), Voltage (XY)
Representation Time Base:	Main-window, main- and zoom-window
Memory Zoom:	Up to 50,000:1
Accuracy:	50 ppm
Time Base:	
Refresh operating modes	2 ns/div...20 ms/div.
Roll operating modes	50 ms/div...50 s/div.

Digital Storage	
Sampling rate [real time]:	2 x 1 GSa/s, 1 x 2 GSa/s [4 x 1 GSa/s, 2 x 2 GSa/s] Logic channels: 8 x 1 GSa/s
Memory:	2 x 1 MPts, 1 x 2 MPts [4 x 1 MPts, 2 x 2 MPts]
Operation modes:	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter
Resolution [vertical]	8 Bit
Resolution [horizontal]	
Yt Mode	50 Pts./div.
XY Mode	8 Bit
Interpolation:	Sinx/x, linear, Sample-hold
Persistence:	Off, 50 ms...∞
Delay pretrigger:	0...8 Million x (1/samplerate)
posttrigger:	0...2 Million x (1/samplerate)
Display refresh rate:	Up to 2000 waveforms/s
Display:	Dots, vectors, „persistence“
Reference memories:	typ. 10 Traces

Operation/Measuring/Interfaces	
Operation:	Menu-driven (multilingual), Autoset, help functions (multilingual)
Save/Recall memories:	typ. 10 complete instrument parameter settings
Frequency counter:	
0.5 Hz...150 MHz	6 Digit resolution
Accuracy	50 ppm
Auto measurements:	Frequency, Period, pulse count, V <sub>pp</sub> , V <sub>p+</sub> , V <sub>p-</sub> , V <sub>rms</sub> , V <sub>avg</sub> , V <sub>top</sub> , V <sub>base</sub> , t <sub>width+</sub> , t <sub>width-</sub> , t <sub>dutycycle+</sub> , t <sub>dutycycle-</sub> , t <sub>rise</sub> , t <sub>fall</sub> , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count
Cursor measurements:	ΔV, Δt, 1/Δt (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak- Dual-Interface USB type B/RS-232 [H0720], 2x USB type A (front- and rear side each 1x) max. 100mA, DVI-D for ext. Monitor
Optional:	IEEE-488 [H0740], Ethernet/USB [H0730]

Display functions	
Marker:	up to 8 user definable marker for easy navigation
VirtualScreen:	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
Busdisplay:	up to 2 busses, user definable, parallel or serial busses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines

<b>Parallel</b>	logic channels can also be used as source for bus definition
<b>I<sup>2</sup>C</b> (Opt. H0010, H0011)	color coded Read-, Write Adress, Data, Start, Stop, acknowledge, missing acknowledge, Errors and Trigger condition
<b>SPI</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition
<b>UART/RS-232</b> (Opt. H0010, H0011)	color coded Data, Start, Stop, Errors and Trigger condition

<b>Mathematic functions</b>	
<b>Number of formula sets:</b>	5 formula sets with up to 5 formulas each
<b>Sources:</b>	All channels and math. memories
<b>Targets:</b>	Math. memories
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
<b>Display:</b>	Up to 4 math. memories with label

<b>Pass/Fail functions</b>	
<b>Sources:</b>	Analog channels
<b>Type of test:</b>	Mask around a signal, userdefined tolerance
<b>Functions:</b>	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

<b>General Information</b>	
<b>Component tester</b>	
<b>Test voltage:</b>	approx. $7V_{rms}$ (open circuit), approx. 100 Hz
<b>Test current:</b>	max. $7mA_{rms}$ (short circuit)

<b>Reference Potential:</b>	Ground (safety earth)
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal $\sim 1V_{pp}$ ( $t_a < 4 ns$ )
<b>Bus Signal Source</b>	SPI, I <sup>2</sup> C, UART, Parallel (4 Bit)
<b>Internal RTC (Realtime clock):</b>	Date and time for stored data
<b>Line voltage:</b>	90...253 V, 50/60 Hz, CAT II
<b>Power consumption:</b>	Max. 50 Watt at 230 V, 50 Hz
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Operating temperature:</b>	+5...+40 °C
<b>Storage temperature:</b>	-20...+70 °C
<b>Rel. humidity:</b>	5...80 % (non condensing)
<b>Dimensions (W x H x D):</b>	285 x 175 x 140 mm
<b>Weight:</b>	<2.5 kg

<b>Accessories supplied:</b> Line cord, Operating manual, 2 [4] Probes, 10:1/1:1 switchable (HZ154), CD	
<b>Recommended accessories:</b>	
H0010	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Logic channels and Analog channels
H0011	Serial bus trigger and hardware accelerated decode, I <sup>2</sup> C, SPI, UART/RS-232 on Analog channels
H03508	active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ091	4RU 19" Rackmount Kit
HZ090	Carrying Case for protection and transport
HZ020	High Voltage probe 1000:1 (400 MHz)
HZ030	single ended active probe (1 GHz)
HZ050	AC/DC Currentprobe 20 A, DC...100 kHz
HZ051	AC/DC Currentprobe 1000 A, DC...20 kHz