


## Data sheet | Item number: 765-1103/100-000

16-channel digital output; Profinet; DC 24 V / 2.0 A; 8xM12 connection;  
WideLine



[www.wago.com/765-1103/100-000](http://www.wago.com/765-1103/100-000)

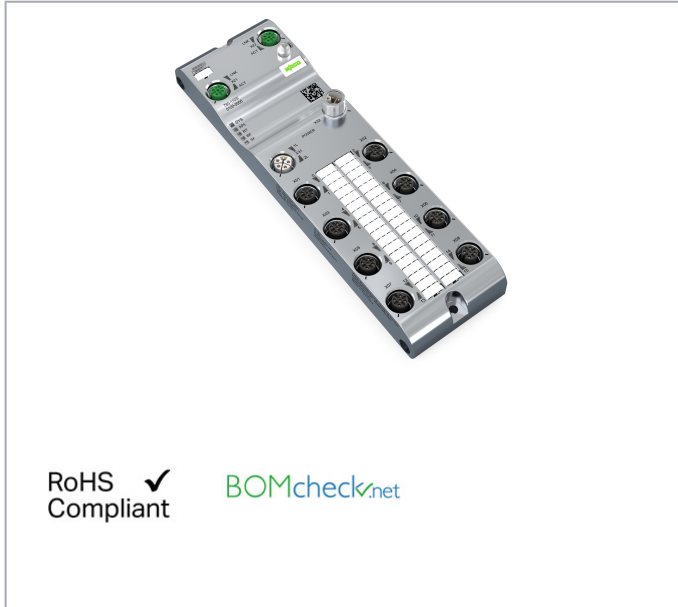

RoHS  
Compliant

BOMcheck.net

### Data

#### Technical Data

#### Feldbus

Communication	PROFINET PROFINET IO Device; 2-port switch, LLDP, MRP, SNMP
Connection technology: communication/fieldbus	2 x D-coded M12; 4-pole
Interface standard	10BASE-T/100BASE-TX; potential-free
Autonegotiation; Autocrossover	yes
PROFINET IO properties	PROFINET IO device; 2-port switch, LLDP, MRP, SNMP

#### Gerätefunktionen

Parameter	Output current Temperature
Diagnostics	Undervoltage; Overcurrent; Overload; Overtemperature
Device functions	Bluetooth® OPC UA server
Visualization	Android/iOS app

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Digitalein-/ausgänge

Number of digital outputs	16
Connection technology: inputs/outputs	8 x A-coded M12; 5-pole
Output current (per channel)	typ. 2 A for DO

## Versorgung Modul

Connection technology: supply	2 x L-coded M12; 5-pole
Supply voltage	24 VDC (18 ... 31.2 V); 1L/2L
Power consumption (max.)	16000 mA
Power consumption (note)	per supply line; overload- and short-circuit-protected
Reverse voltage protection	Yes

## Geometrical Data

Width	60 mm / 2.362 inch
Height	30 mm / 1.181 inch
Depth	210 mm / 8.268 inch

## Mechanical Data

Weight	610 g
Conformity marking	CE

## Environmental Requirements

Surrounding air temperature (operation)	-25 ... 70 °C
Surrounding air temperature (storage)	-40 ... 80 °C
Protection type	IP67
Protection class	III per EN 61140, IEC 61140, VDE 0140-1
Operating altitude	0 ... 2000 m 0 ... 2000 m
Pollution degree (5)	3 per EN 60664-1 3 (EN 60664-1)
Overvoltage category	II (EN 60664-1)
Relative humidity (without condensation)	95 %
Vibration resistance	5g per IEC 60068-2-6
Shock resistance	Short-term: 50g/11 ms/half-sine per IEC 60068-2-27; Long-term: 30g/6 ms/half-sine per IEC 60068-2-29
EMC immunity to interference	per EN 61000-6-2

Subject to changes. Please also observe the further product documentation!

EMC emission of interference


per EN 61000-6-4

## Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4055143949972
Customs tariff number	85371098990

## Required accessories



### protection

	<b>Item no.: 756-8102</b> M12 protective cap; for unused sockets; -	<a href="http://www.wago.com/756-8102">www.wago.com/756-8102</a>
	<b>Item no.: 756-8103</b> M12 protective cap; for unused plugs; -	<a href="http://www.wago.com/756-8103">www.wago.com/756-8103</a>

### tools





	<b>Item no.: 206-701</b> Torque wrench M8 and M12; Assembly kit	<a href="http://www.wago.com/206-701">www.wago.com/206-701</a>
--	--	--

### Marking accessories














	<b>Item no.: 2009-110</b> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>
	<b>Item no.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>

## Compatible products














### wiring and connectors

	<b>Item no.: 756-1201/060-020</b> ETHERNET cable; 4-pole; M12 plug, axial; Length: 2 m	<a href="http://www.wago.com/756-1201/060-020">www.wago.com/756-1201/060-020</a>
	<b>Item no.: 756-1201/060-050</b> ETHERNET cable; 4-pole; M12 socket, straight; Length: 5 m	<a href="http://www.wago.com/756-1201/060-050">www.wago.com/756-1201/060-050</a>
	<b>Item no.: 756-1201/060-100</b> ETHERNET cable; 4-pole; M12 socket, straight; Length: 10 m	<a href="http://www.wago.com/756-1201/060-100">www.wago.com/756-1201/060-100</a>
	<b>Item no.: 756-1201/060-200</b> ETHERNET cable; 4-pole; M12 socket, straight; Length: 20 m	<a href="http://www.wago.com/756-1201/060-200">www.wago.com/756-1201/060-200</a>














Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 756-1202/060-020</b> ETHERNET cable; 4-pole; M12 plug, right angle; Length: 2 m	<a href="http://www.wago.com/756-1202/060-020">www.wago.com/756-1202/060-020</a>
	<b>Item no.: 756-1202/060-050</b> ETHERNET cable; 4-pole; M12 plug, right angle; Length: 5 m	<a href="http://www.wago.com/756-1202/060-050">www.wago.com/756-1202/060-050</a>
	<b>Item no.: 756-1202/060-100</b> ETHERNET cable; 4-pole; M12 plug, right angle; Length: 10 m	<a href="http://www.wago.com/756-1202/060-100">www.wago.com/756-1202/060-100</a>
	<b>Item no.: 756-1202/060-200</b> ETHERNET cable; 4-pole; M12 plug, right angle; Length: 20 m	<a href="http://www.wago.com/756-1202/060-200">www.wago.com/756-1202/060-200</a>
	<b>Item no.: 756-1203/060-020</b> ETHERNET cable; 4-pole; M12 plug, axial; M12 plug, axial; Length: 2 m	<a href="http://www.wago.com/756-1203/060-020">www.wago.com/756-1203/060-020</a>
	<b>Item no.: 756-1203/060-050</b> ETHERNET cable; 4-pole; M12 plug, axial; M12 plug, axial; Length: 5 m	<a href="http://www.wago.com/756-1203/060-050">www.wago.com/756-1203/060-050</a>
	<b>Item no.: 756-1203/060-100</b> ETHERNET cable; 4-pole; M12 plug, axial; M12 plug, axial; Length: 10 m	<a href="http://www.wago.com/756-1203/060-100">www.wago.com/756-1203/060-100</a>
	<b>Item no.: 756-1203/060-200</b> ETHERNET cable; 4-pole; M12 plug, axial; M12 plug, axial; Length: 20 m	<a href="http://www.wago.com/756-1203/060-200">www.wago.com/756-1203/060-200</a>
	<b>Item no.: 756-1204/060-010</b> ETHERNET/PROFINET cable, angled; 1 m; fitted on both ends; D-coded; M12 plug, angled; M12 plug, angled; green	<a href="http://www.wago.com/756-1204/060-010">www.wago.com/756-1204/060-010</a>
	<b>Item no.: 756-1204/060-020</b> ETHERNET cable; 4-pole; M12 plug, right angle; M12 plug, right angle; Length: 2 m	<a href="http://www.wago.com/756-1204/060-020">www.wago.com/756-1204/060-020</a>
	<b>Item no.: 756-1204/060-030</b> ETHERNET cable; 4-pole; M12 plug, right angle; M12 plug, right angle; Length: 3 m	<a href="http://www.wago.com/756-1204/060-030">www.wago.com/756-1204/060-030</a>
	<b>Item no.: 756-1204/060-050</b> ETHERNET cable; 4-pole; M12 plug, right angle; M12 plug, right angle; Length: 5 m	<a href="http://www.wago.com/756-1204/060-050">www.wago.com/756-1204/060-050</a>
	<b>Item no.: 756-1204/060-100</b> ETHERNET cable; 4-pole; M12 plug, right angle; M12 plug, right angle; Length: 10 m	<a href="http://www.wago.com/756-1204/060-100">www.wago.com/756-1204/060-100</a>














Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 756-1204/060-200</b> ETHERNET cable; 4-pole; M12 plug, right angle; M12 plug, right angle; Length: 20 m	<a href="http://www.wago.com/756-1204/060-200">www.wago.com/756-1204/060-200</a>
	<b>Item no.: 756-3501/050-020</b> Power cable; M12L socket; straight; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3501/050-020">www.wago.com/756-3501/050-020</a>
	<b>Item no.: 756-3501/050-050</b> Power cable; M12L socket; straight; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3501/050-050">www.wago.com/756-3501/050-050</a>
	<b>Item no.: 756-3501/050-075</b> Power cable; M12L socket; straight; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3501/050-075">www.wago.com/756-3501/050-075</a>
	<b>Item no.: 756-3501/050-100</b> Power cable; M12L socket; straight; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3501/050-100">www.wago.com/756-3501/050-100</a>
	<b>Item no.: 756-3501/050-150</b> Power cable; M12L socket; straight; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3501/050-150">www.wago.com/756-3501/050-150</a>
	<b>Item no.: 756-3502/050-020</b> Power cable; M12L socket; angled; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3502/050-020">www.wago.com/756-3502/050-020</a>
	<b>Item no.: 756-3502/050-050</b> Power cable; M12L socket; angled; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3502/050-050">www.wago.com/756-3502/050-050</a>
	<b>Item no.: 756-3502/050-075</b> Power cable; M12L socket; angled; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3502/050-075">www.wago.com/756-3502/050-075</a>
	<b>Item no.: 756-3502/050-100</b> Power cable; M12L socket; angled; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3502/050-100">www.wago.com/756-3502/050-100</a>
	<b>Item no.: 756-3502/050-150</b> Power cable; M12L socket; angled; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3502/050-150">www.wago.com/756-3502/050-150</a>
	<b>Item no.: 756-3503/050-020</b> Power cable; M12L plug; straight; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3503/050-020">www.wago.com/756-3503/050-020</a>
	<b>Item no.: 756-3503/050-050</b> Power cable; M12L plug; straight; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3503/050-050">www.wago.com/756-3503/050-050</a>














Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 756-3503/050-075</b> Power cable; M12L plug; straight; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3503/050-075">www.wago.com/756-3503/050-075</a>
	<b>Item no.: 756-3503/050-100</b> Power cable; M12L plug; straight; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3503/050-100">www.wago.com/756-3503/050-100</a>
	<b>Item no.: 756-3503/050-150</b> Power cable; M12L plug; straight; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3503/050-150">www.wago.com/756-3503/050-150</a>
	<b>Item no.: 756-3504/050-020</b> Power cable; M12L plug; angled; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3504/050-020">www.wago.com/756-3504/050-020</a>
	<b>Item no.: 756-3504/050-050</b> Power cable; M12L plug; angled; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3504/050-050">www.wago.com/756-3504/050-050</a>
	<b>Item no.: 756-3504/050-075</b> Power cable; M12L plug; angled; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3504/050-075">www.wago.com/756-3504/050-075</a>
	<b>Item no.: 756-3504/050-100</b> Power cable; M12L plug; angled; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3504/050-100">www.wago.com/756-3504/050-100</a>
	<b>Item no.: 756-3504/050-150</b> Power cable; M12L plug; angled; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3504/050-150">www.wago.com/756-3504/050-150</a>
	<b>Item no.: 756-3505/050-003</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 0.3 m	<a href="http://www.wago.com/756-3505/050-003">www.wago.com/756-3505/050-003</a>
	<b>Item no.: 756-3505/050-005</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 0.5 m	<a href="http://www.wago.com/756-3505/050-005">www.wago.com/756-3505/050-005</a>
	<b>Item no.: 756-3505/050-010</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 1 m	<a href="http://www.wago.com/756-3505/050-010">www.wago.com/756-3505/050-010</a>
	<b>Item no.: 756-3505/050-020</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3505/050-020">www.wago.com/756-3505/050-020</a>
	<b>Item no.: 756-3505/050-050</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3505/050-050">www.wago.com/756-3505/050-050</a>

Subject to changes. Please also observe the further product documentation!














	<b>Item no.: 756-3505/050-075</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3505/050-075">www.wago.com/756-3505/050-075</a>
	<b>Item no.: 756-3505/050-100</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3505/050-100">www.wago.com/756-3505/050-100</a>
	<b>Item no.: 756-3505/050-150</b> Power cable; M12L socket; straight; M12L plug; straight; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3505/050-150">www.wago.com/756-3505/050-150</a>
	<b>Item no.: 756-3506/050-003</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 0.3 m	<a href="http://www.wago.com/756-3506/050-003">www.wago.com/756-3506/050-003</a>
	<b>Item no.: 756-3506/050-005</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 0.5 m	<a href="http://www.wago.com/756-3506/050-005">www.wago.com/756-3506/050-005</a>
	<b>Item no.: 756-3506/050-010</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 1 m	<a href="http://www.wago.com/756-3506/050-010">www.wago.com/756-3506/050-010</a>
	<b>Item no.: 756-3506/050-020</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-3506/050-020">www.wago.com/756-3506/050-020</a>
	<b>Item no.: 756-3506/050-050</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-3506/050-050">www.wago.com/756-3506/050-050</a>
	<b>Item no.: 756-3506/050-075</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 7.5 m	<a href="http://www.wago.com/756-3506/050-075">www.wago.com/756-3506/050-075</a>
	<b>Item no.: 756-3506/050-100</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-3506/050-100">www.wago.com/756-3506/050-100</a>
	<b>Item no.: 756-3506/050-150</b> Power cable; M12L socket; angled; M12L plug; angled; 5-pole; Length: 15 m	<a href="http://www.wago.com/756-3506/050-150">www.wago.com/756-3506/050-150</a>
	<b>Item no.: 756-5311/040-015</b> Sensor/Actuator cable; 4-pole; Length: 1.5 m	<a href="http://www.wago.com/756-5311/040-015">www.wago.com/756-5311/040-015</a>
	<b>Item no.: 756-5311/040-050</b> Sensor/Actuator cable; 4-pole; Length: 5 m	<a href="http://www.wago.com/756-5311/040-050">www.wago.com/756-5311/040-050</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 756-5311/040-100</b> Sensor/Actuator cable; 4-pole; Length: 10 m	<a href="http://www.wago.com/756-5311/040-100">www.wago.com/756-5311/040-100</a>
	<b>Item no.: 756-5312/040-015</b> Sensor/Actuator cable; 4-pole; Length: 1.5 m	<a href="http://www.wago.com/756-5312/040-015">www.wago.com/756-5312/040-015</a>
	<b>Item no.: 756-5312/040-050</b> Sensor/Actuator cable; 4-pole; Length: 5 m	<a href="http://www.wago.com/756-5312/040-050">www.wago.com/756-5312/040-050</a>
	<b>Item no.: 756-5312/040-100</b> Sensor/Actuator cable; 4-pole; Length: 10 m	<a href="http://www.wago.com/756-5312/040-100">www.wago.com/756-5312/040-100</a>
	<b>Item no.: 756-5401/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5401/040-010">www.wago.com/756-5401/040-010</a>
	<b>Item no.: 756-5401/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5401/040-020">www.wago.com/756-5401/040-020</a>
	<b>Item no.: 756-5402/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5402/040-010">www.wago.com/756-5402/040-010</a>
	<b>Item no.: 756-5402/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5402/040-020">www.wago.com/756-5402/040-020</a>
	<b>Item no.: 756-5403/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5403/040-010">www.wago.com/756-5403/040-010</a>
	<b>Item no.: 756-5403/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5403/040-020">www.wago.com/756-5403/040-020</a>
	<b>Item no.: 756-5404/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5404/040-010">www.wago.com/756-5404/040-010</a>
	<b>Item no.: 756-5404/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5404/040-020">www.wago.com/756-5404/040-020</a>
	<b>Item no.: 756-5507/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5507/040-010">www.wago.com/756-5507/040-010</a>

Subject to changes. Please also observe the further product documentation!



	<b>Item no.: 756-5507/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5507/040-020">www.wago.com/756-5507/040-020</a>
	<b>Item no.: 756-5508/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5508/040-010">www.wago.com/756-5508/040-010</a>
	<b>Item no.: 756-5508/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5508/040-020">www.wago.com/756-5508/040-020</a>
	<b>Item no.: 756-5509/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5509/040-010">www.wago.com/756-5509/040-010</a>
	<b>Item no.: 756-5509/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5509/040-020">www.wago.com/756-5509/040-020</a>
	<b>Item no.: 756-5510/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5510/040-010">www.wago.com/756-5510/040-010</a>
	<b>Item no.: 756-5510/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5510/040-020">www.wago.com/756-5510/040-020</a>
	<b>Item no.: 756-5513/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5513/040-010">www.wago.com/756-5513/040-010</a>
	<b>Item no.: 756-5513/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5513/040-020">www.wago.com/756-5513/040-020</a>
	<b>Item no.: 756-5514/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5514/040-010">www.wago.com/756-5514/040-010</a>
	<b>Item no.: 756-5514/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5514/040-020">www.wago.com/756-5514/040-020</a>
	<b>Item no.: 756-5516/040-010</b> Sensor/Actuator cable; 4-pole; Length: 1 m	<a href="http://www.wago.com/756-5516/040-010">www.wago.com/756-5516/040-010</a>
	<b>Item no.: 756-5516/040-020</b> Sensor/Actuator cable; 4-pole; Length: 2 m	<a href="http://www.wago.com/756-5516/040-020">www.wago.com/756-5516/040-020</a>

Subject to changes. Please also observe the further product documentation!



**Item no.: 756-5517/040-010**  
Sensor/Actuator cable; 4-pole; Length: 1 m

[www.wago.com/756-5517/040-010](http://www.wago.com/756-5517/040-010)



**Item no.: 756-5517/040-020**  
Sensor/Actuator cable; 4-pole; Length: 2 m

[www.wago.com/756-5517/040-020](http://www.wago.com/756-5517/040-020)



**Item no.: 756-9202/040-000**  
Accessories; 4-pole

[www.wago.com/756-9202/040-000](http://www.wago.com/756-9202/040-000)



**Item no.: 756-9205/040-000**  
Accessories; 4-pole

[www.wago.com/756-9205/040-000](http://www.wago.com/756-9205/040-000)



**Item no.: 756-9301/040-000**  
Accessories; 4-pole

[www.wago.com/756-9301/040-000](http://www.wago.com/756-9301/040-000)



**Item no.: 756-9301/050-000**  
Accessories; 5-pole

[www.wago.com/756-9301/050-000](http://www.wago.com/756-9301/050-000)



**Item no.: 756-9501/040-000**  
Accessories; 4-pole; M12 plug, right angle

[www.wago.com/756-9501/040-000](http://www.wago.com/756-9501/040-000)



**Item no.: 756-9501/060-000**  
Fitted pluggable connector; 4-pole, shielded; M12 plug, straight, D-coded; Spring

[www.wago.com/756-9501/060-000](http://www.wago.com/756-9501/060-000)



**Item no.: 756-9503/040-000**  
Accessories; 4-pole

[www.wago.com/756-9503/040-000](http://www.wago.com/756-9503/040-000)



**Item no.: 756-9504/040-000**  
Accessories; 4-pole

[www.wago.com/756-9504/040-000](http://www.wago.com/756-9504/040-000)



**Item no.: 756-9701/050-000**  
Fitted pluggable connector; 5-pole; M12 plug, straight; IDC technology

[www.wago.com/756-9701/050-000](http://www.wago.com/756-9701/050-000)



**Item no.: 756-9711/050-000**  
Fitted pluggable connector; 5-pole; M12 socket, straight; IDC technology

[www.wago.com/756-9711/050-000](http://www.wago.com/756-9711/050-000)

## Downloads Documentation

### Manual

Subject to changes. Please also observe the further product documentation!



16-Channel Digital Output; Profinet

DC 24 V / 2.0 A; 8xM12 Connection; WideLine

V 2.1.0

30. 11. 2020

pdf

3.8 MB

[Download](#)

### System Description

WAGO I/O System Field; General Product Information

pdf

708.2 kB

[Download](#)

### CAD/CAE-Data

#### CAD data

2D/3D Models 765-1103/100-000

URL

[Download](#)

#### CAE data

ZUKEN Portal 765-1103/100-000

URL

[Download](#)

### Device Files

#### Device Description File

750-916; GSD-Dateien der Version 2.x für PROFINET/ Serie 750/753, 765, 767 und 852

2.8

15. 1. 2021

zip

2.6 MB

[Download](#)

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 765-1103/100-000

URL

[Download](#)

16-channel digital output; Profinet; DC 24 V / 2.0 A; 8xM12 connection; WideLine

### Installation Notes

### Product family

#### **I/O System Field**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.