

- Wide 2:1 input voltage 15 W DC/DC converter in a 1.6 × 1 " plastic case
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2×MOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current < 2.5 µA
- Extended operating temperature range -40°C to 85°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5 year product warranty A



The THM 15 series is a range of medical 15 Watt DC/DC converters in 1.6" x 1.0" plastic package and with wide 2:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2.5 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 × MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 90% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +85°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

| Models      |                                  |                |                     |                 |
|-------------|----------------------------------|----------------|---------------------|-----------------|
| Order code  | Input voltage range              | Output voltage | Output current max. | Efficiency typ. |
| THM 15-1211 | 9.0 – 18 VDC<br>(12 VDC nominal) | 5.0 VDC        | 3000 mA             | 87.0 %          |
| THM 15-1212 |                                  | 12 VDC         | 1250 mA             | 88.5 %          |
| THM 15-1213 |                                  | 15 VDC         | 1000 mA             | 88.5 %          |
| THM 15-1215 |                                  | 24 VDC         | 625 mA              | 89.0 %          |
| THM 15-1221 |                                  | ±5 VDC         | ±1500 mA            | 86.0 %          |
| THM 15-1222 |                                  | ±12 VDC        | ±625 mA             | 89.0 %          |
| THM 15-1223 |                                  | ±15 VDC        | ±500 mA             | 89.0 %          |
| THM 15-2411 | 18 – 36 VDC<br>(24 VDC nominal)  | 5.0 VDC        | 3000 mA             | 90.0 %          |
| THM 15-2412 |                                  | 12 VDC         | 1250 mA             | 90.0 %          |
| THM 15-2413 |                                  | 15 VDC         | 1000 mA             | 90.0 %          |
| THM 15-2415 |                                  | 24 VDC         | 625 mA              | 90.0 %          |
| THM 15-2421 |                                  | ±5 VDC         | ±1500 mA            | 86.0 %          |
| THM 15-2422 |                                  | ±12 VDC        | ±625 mA             | 90.0 %          |
| THM 15-2423 |                                  | ±15 VDC        | ±500 mA             | 90.0 %          |
| THM 15-4811 | 36 – 75 VDC<br>(48 VDC nominal)  | 5.0 VDC        | 3000 mA             | 89.5 %          |
| THM 15-4812 |                                  | 12 VDC         | 1250 mA             | 88.0 %          |
| THM 15-4813 |                                  | 15 VDC         | 1000 mA             | 88.0 %          |
| THM 15-4815 |                                  | 24 VDC         | 625 mA              | 88.5 %          |
| THM 15-4821 |                                  | ±5 VDC         | ±1500 mA            | 86.0 %          |
| THM 15-4822 |                                  | ±12 VDC        | ±625 mA             | 88.5 %          |
| THM 15-4823 |                                  | ±15 VDC        | ±500 mA             | 88.0 %          |

## Input Specifications

|   |   |
|---|---|
| Input current no load   | 12 Vin models: 18 mA typ.<br>24 Vin models: 13 mA typ.<br>48 Vin models: 10 mA typ.   |
| Surge voltage (3 sec. max.)                                       | 12 Vin models: 25 V max.<br>24 Vin models: 50 V max.<br>48 Vin models: 100 V max.   |
| Start-up voltage  | 12 Vin models: 9 VDC (or lower)<br>24 Vin models: 18 VDC (or lower)<br>48 Vin models: 36 VDC (or lower)   |
| Startup time  | 60 ms max. (30 ms typ.)   |
| Under voltage shut down (lock-out circuit)                        | 12 Vin models: 7.8 - 8.6 VDC<br>24 Vin models: 15.8 - 17.4 VDC<br>48 Vin models: 32 - 34 VDC  |
| Input filter  | Pi-type   |
| Conducted noise   | – Conducted & Radiated input surpression<br>– Filter proposal<br>EN 55011 limits to IEC 60601-1-2 4th edition<br>EN55032 class A (internal filter)<br>EN55032 class B with external components<br><a href="http://www.tracopower.com/overview/thm15">www.tracopower.com/overview/thm15</a>  |
| EMC immunity  | – Generic for Medical equipment<br>– ESD (electrostatic discharge)<br>– Radiated immunity<br>– Fast transient / surge (with external input capacitor / diode)<br>12 Vin models: Nippon chemi-con KY 220 µF/ 100 V<br>TVS - SMDJ36A, 36V, 3000 W)<br>24 Vin models: Nippon chemi-con KY 220 µF/ 100 V<br>TVS - SMDJ58A, 58V, 3000 W)<br>48 Vin models: Nippon chemi-con KY 220 µF/ 100 V<br>TVS - SMDJ120A, 120V, 3000 W)<br>– Conducted immunity<br>– Magnetic field immunity<br>IEC/EN 60601-1-2 4th edition<br>EN 61000-4-2, air ±15 kV, contact ±8 kV, perf. criteria A<br>EN 61000-4-3, 10 V/m, perf. criteria A<br>EN 61000-4-4, ±2 kV, perf. criteria A<br>EN 61000-4-5, ±2 kV perf. criteria A<br>EN 61000-4-6, 10 Vrms, perf. criteria A<br>EN 61000-4-8<br>100 A/m, continuous, perf. criteria A<br>1000 A/m, 1 sec., perf. criteria A |
| External input fuse required (recommended values, slow blow type) | 12 Vin models: 3.15 A<br>24 Vin models: 1.6 A<br>48 Vin models: 0.8 A   |

## Output Specifications

|   |  |
|---|--|
| Voltage set accuracy  | ±1 % max.  |
| Output voltage adjustment range (single output models only) | 5 & 12 VDC models: ±10%<br>15 & 24 VDC models: -10 / +20%  |
| Regulation  | – Input variation<br>single output: 0.2 % max.<br>dual output: 0.5 % max.<br>– Load variation 0 – 100 %<br>single output: 0.2 % max.<br>dual output: 1.0 % max.<br>– Cross regulation<br>dual output: 5.0 % max. (asymmetrical load 25/100%)                 |
| Temperature coefficient                                     | ±0.02 %/K typ.   |
| Minimum load  | not required   |
| Ripple and noise (20 MHz Bandwidth)                         | (±)5.0 VDC models: 50 mVp-p typ. with cap. 10 µF/25V X7R MLCC<br>(±)12 VDC models: 75 mVp-p typ. with cap. 10 µF/25V X7R MLCC<br>(±)15 VDC models: 75 mVp-p typ. with cap. 10 µF/25V X7R MLCC<br>24 VDC models: 100 mVp-p typ. with cap. 4.7 µF/50V X7R MLCC |
| Transient response  | – Recovery time (25% load step change)<br>250 µs typ.  |

## General Specifications


|  |  |  |
|--|--|--|
| Overload protection  |  | at 150 % typ. of I <sub>out</sub> rated (hiccup mode)  |
| Short-circuit protection   |  | Continuous, automatic recovery   |
| Overvoltage protection   | (±)5.0 VDC models:<br>(±)12 VDC models:<br>(±)15 VDC models:<br>24 VDC models: | 6.2 VDC typ.<br>15 VDC typ.<br>20 VDC typ.<br>30 VDC typ.  |
| Capacitive load  | – Single output  | 5.0 VDC models: 3'800 µF max.<br>12 VDC models: 650 µF max.<br>15 VDC models: 530 µF max.<br>24 VDC models: 190 µF max.              |
|  | – Dual output  | ±5 VDC models: 1'900 µF max. (each output)<br>±12 VDC models: 380 µF max. (each output)<br>±15 VDC models: 270 µF max. (each output) |
| Temperature ranges   | – Operating  | –40°C to +85°C   |
|  | – Case temperature   | +105°C max.  |
|  | – Storage temperature  | –55°C to +125°C  |
| Derating   |  | 2.86% above 65°C   |
| Overtemperature protection   |  | at 115°C typ.  |
| Thermal impedance  |  | 15.30 °C/W   |
| Humidity (non condensing)  |  | 5 % to 95 % rel H max.   |
| Isolation voltage (50 Hz, 60 s)                                      |  | 5000 VACrms, reinforced  |
| Clearance/creepage   |  | 8 mm min.  |
| Leakage current (at 240VAC, 60 Hz)                                   |  | 2.5 µA max.  |
| Isolation capacitance (input/output)                                 |  | 20 pF typ.   |
| Altitude during operation  |  | 5000 m   |
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) |  | tbd  |
| Switching frequency  |  | 250 kHz typ. (pulse width modulation)  |
| Vibration and thermal shock resistance                               |  | according to MIL-STD-810F  |
| Safety standards/approvals – Medical equipment                       |  | ANSI/AAMI ES 60601-1:2005/(R)2012,<br>IEC/EN 60601-1 3rd edition   |
|  | – Certification documents  | <a href="http://www.tracopower.com/overview/thm15wi">www.tracopower.com/overview/thm15wi</a>   |
| Environmental compliance   | – Reach  | <a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a>             |
|  | – RoHS   | RoHS directive 2011/65/EU  |

## Physical Specifications

|                       |                           |
|-----------------------|---------------------------|
| Casing material       | non-conductive plastic    |
| Base material         | non-conductive plastic    |
| Potting material      | silicone (UL94 V-0 rated) |
| Package weight        | 24 g (0.85oz)             |
| Soldering temperature | max. 265°C / 10 sec       |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Outline Dimensions**

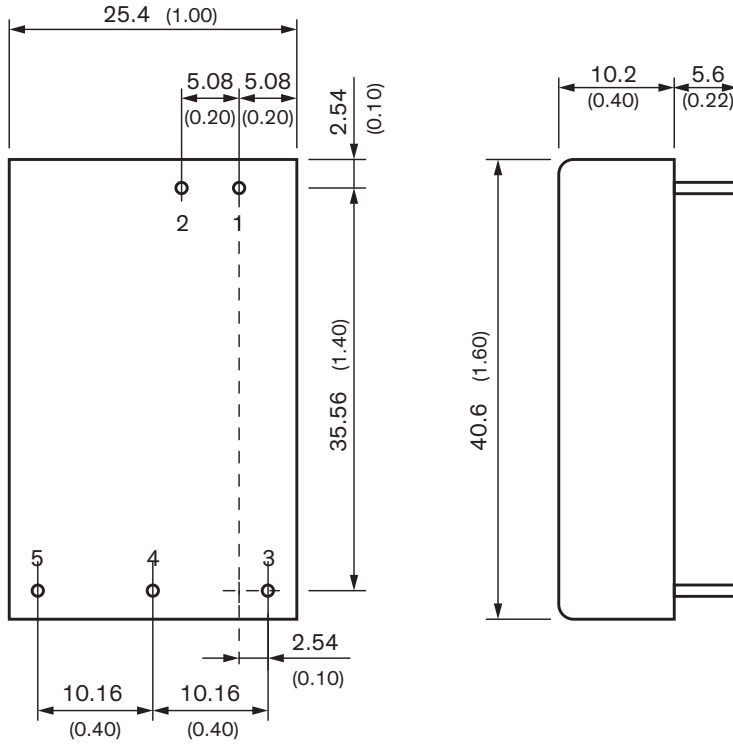

| Pinout |            |            |
|--------|------------|------------|
| Pin    | Single     | Dual       |
| 1      | +Vin (Vcc) | +Vin (Vcc) |
| 2      | -Vin (GND) | -Vin (GND) |
| 4      | +Vout      | +Vout      |
| 5      | -Vout      | Common     |
| 6      | Trim       | -Vout      |

Dimensions in [mm], ( ) = Inch  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 $\pm 0.25$  ( $\pm 0.01$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin  $\varnothing$   $1.0 \pm 0.1$  ( $0.04 \pm 0.004$ )