

Data sheet

722-134

FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING SOLDER
PIN 0.6x1 MM



Technical data

Package size 100 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	4
Voltage CSA	300 V
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	3.8 g
Color	light grey
Height	18.25 mm
Height	0.719 in
Width	21.5 mm
Width	0.846 in
Depth	11.6 mm
Depth	0.457 in

xxx-xxx/031-000	with fixing flange
xxx-xxx/039-000	with locking devices
xxx-xxx/047-000	with spacers

Data sheet

722-134

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING SOLDER
PIN 0.6x1 MM**

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/699/03	
BV	250	12	11915/A0	
CCA	250	12	DK2127	
CSM	250	12	017956	
DNV	250	12	E-6997	
GL	250	12	17296-00HH	
KEMA	250	12	98.2486.01	
LR	250	12	96/20035	
NEMKO	250		P94101840	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	

Data sheet

722-134

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING SOLDER
PIN 0.6x1 MM**

Accessories**Item number**

TEST PLUG 2 MM / 0.079 IN WIDE

210-136


TEST PLUG 2.3 MM / 0.091 IN WIDE

210-137

Data sheet

722-134

FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING SOLDER
PIN 0.6x1 MM

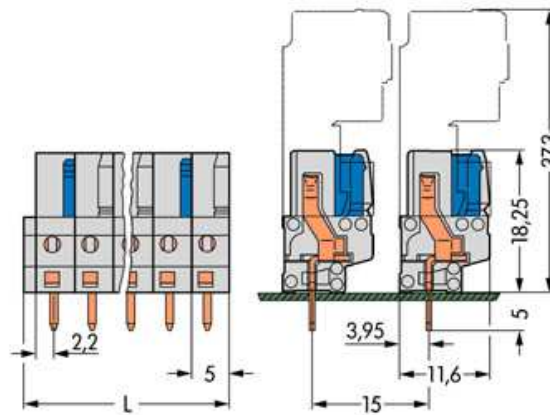

Data sheet

722-134

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING SOLDER
PIN 0.6x1 MM**

Diameter of drilled hole: $1,3^{+0,1}$ mm

L = (No.of poles x pin spacing) +1,5 mm