

Data sheet

739-107

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**



Technical data

Package size 120 4*30 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	7
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	12 A
Current CSA	12 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	8.301 g
Color	grey
Wiring type	Front-entry
No. of connection Points	7
No. of potentials	7
Height	15.8 mm
Height	0.622 in
Width	36.5 mm

Data sheet**739-107****PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Width	1.437 in
Depth	14.3 mm
Depth	0.563 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

xxx-xxx/000-005	red
xxx-xxx/000-006	blue
xxx-xxx/000-017	light green
xxx-xxx/000-023	green
xxx-xxx/000-004	black
xxx-xxx/000-014	brown

Data sheet

739-107

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
CCA	250	12	DK2079	
CSA	300	12	18677-48	
DEMKO	250	12	99-04156	
RMR	250	12	99.00007.250	
UL	300	12	E45172	

Data sheet

739-107

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**


Accessories**Item number**

SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-161
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-162
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-164

Data sheet

739-107

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

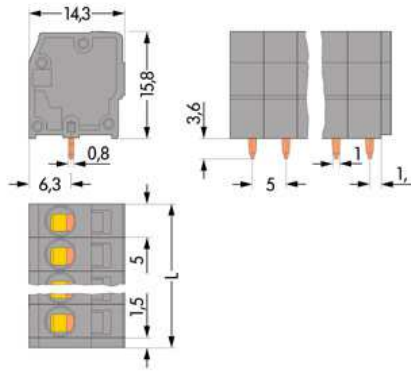

Data sheet

739-107

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 5 MM / 0.197 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Diameter of drilled hole: $1,6^{+0,1}$ mm

$L = (\text{No. of poles} - 1) \times \text{pin spacing } 5 \text{ mm} + 1,5 \text{ mm}$