


Item no.: 735-123
 Product description: PCB TERMINAL BLOCK 2 SOLDER PINS / 3 POLE WITH PUSH BOTTONS PIN SPACING 3.81 MM / 0.15 IN WITHOUT SPACER HIGH VERSION WITH TEST SLOT FOR TEST PLUG 1 MM Ø

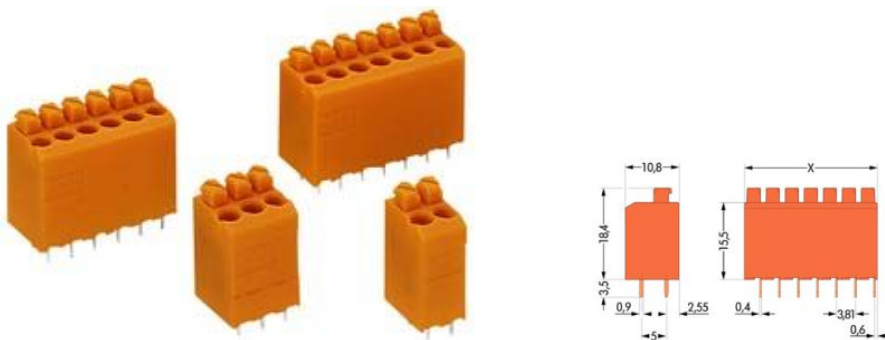

Produkt kann von Bild abweichen / product may differ

Packing unit 440 pieces

RoHS compliant

Weight	2.18 g
Color	orange
No. of connection Points	3
No. of potentials	3
pole count	3
Height	18.4 mm
Height	0.724 in
Width	11.43 mm
Width	0.45 in
Depth	10.8 mm
Depth	0.425 in
Pin spacing from	3.81 mm
Pin spacing from	0.15 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	10 A

Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	10 A
Connection method	PUSH WIRE®



Cross section [mm ²]	0.5 - 1.5 mm ²
Wiring method	solid
Cross section [AWG]	20 - 16 AWG
Strip length from	8 mm
Strip length to	9 mm
Material group	I
Contact material	Electrolytic copper (Ecu)
Contact surface	tin-plated



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
735-123	CCA	NL6288	400	17,5	0,5-1,5
735-123	CSA	18677-47	300	10	20-12
735-123	KEMA	2110204.11	400	17,5	0,5-1,5
735-123	UR	E45172	300	10	20-16

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected