
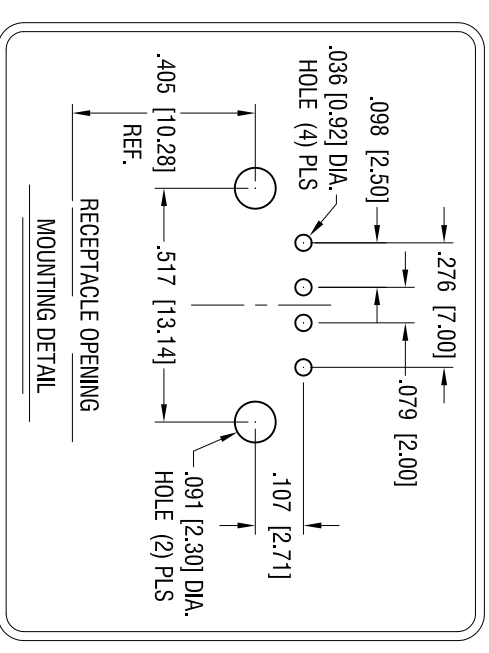


DATE	DESCRIPTION	REV.
3.23.04	CHANGE AS PER ECN 04-018	C
12.6.04	CHANGE AS PER ECN 04-167	D
6.8.05	CHANGE AS PER ECN 05-033	E
12.16.09	CHANGE AS PER ECN 09-189	F

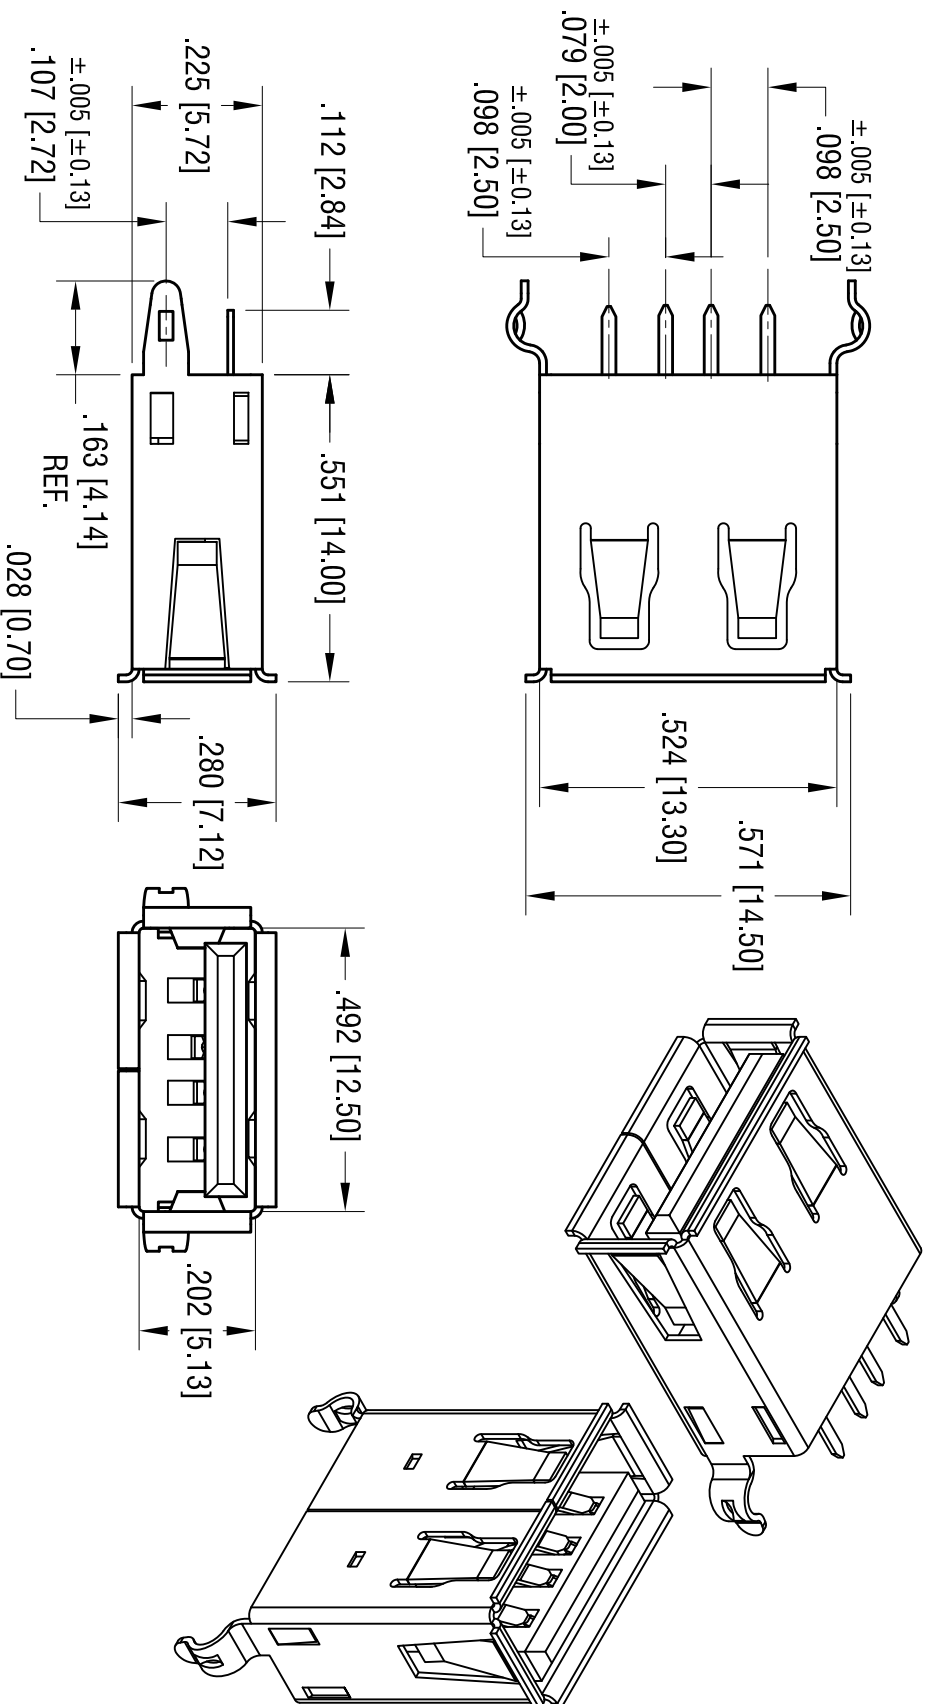

**Notes:**

**Material:**

- Shell: Mat'l- Phosphor Bronze
- Finish: Tin plate, over Nickel Plate
- Insulator: Glass Filled LCP
- Contacts: Phosphor Bronze
- Finish:
- Contact Area: Gold Plate over Nickel Plate
- on Solder Tail: Tin Plate over Nickel Plate

**Electrical Specifications**

- Rated Voltage: 30V AC (rms)
- Contact Current Rating: 1 A Max.
- Contact Resistance: 30 milliohms Max.
- Dielectric Withstanding: 750V AC
- Operating Temperature: -55°C to 85°C

**KEYSTONE ELECTRONICS CORP.**

www.keystone.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

**PART NAME**

USB A-TYPE VERTICAL SOCKET

**MATERIAL**

AS NOTED

**FINISH**

AS NOTED

TOLERANCES	INCH	[MM]	CODE	DWG NO.
DECIMAL	± .010	[± 0.25]	C/M	
ANGULAR	± 1°			
UNLESS OTHERWISE SPECIFIED				

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

DRN BY: BOONE DATE: 6.18.98

App'd: LN SCALE: 3X

923