


Item no.: 236-744  
 Product description: MODULAR PCB TERMINAL BLOCK; 2  
 SOLDER PINS / POLE; 1 POLE; PIN  
 SPACING 5/5.08 MM / 0.2 IN; FRONT-/SIDE-  
 ENTRY; CAGE CLAMP®CONNECTION

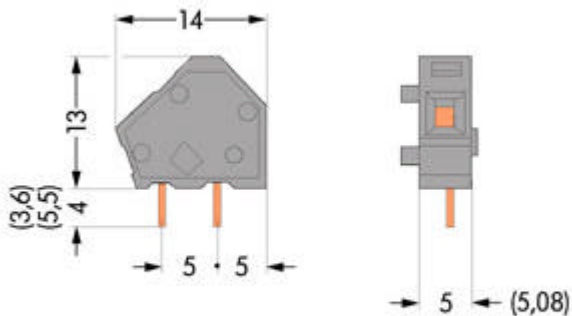

Packing unit 600 6\*100 pieces

Pin spacing from	5 mm
Pin spacing up to	5,08 mm
Pin spacing from	0,197 in
Pin spacing up to	0,2 in
pole count	1
Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2,5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP®CONNECTION
Voltage CSA	300 V
Voltage UL	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	500 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	16 A
Weight	0,873 g
Color	blue
Wiring type	Front-/Side-entry
No. of connection Points	1
No. of potentials	1
Height	13 mm
Height	0,512 in
Width	5 mm
Width	0,197 in

Depth	14 mm
Depth	0,551 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0,22 in

	Admission office	Approval no.	Voltage [ V ]	Current [ A ]	Cross section [ mm <sup>2</sup> ]
236-744	BBJ	B/12/697/03	250	16	0,5-2,5
236-744	BV	11915/A0	500/250	16	0,08-2,5
236-744	CCA	DK2082	250	16	0,5-2,5
236-744	CSA	18677-10	300	15	28-12
236-744	CSM	017956	250	16	0,08-2,5
236-744	DEMKO	98-04355	250	16	0,5-2,5
236-744	DNV	E6998	250	16	0,5-2,5
236-744	GL	17296-00HH	500/250	16	0,5-2,5
236-744	KEMA	83.6970.01/02	380	16	2,5
236-744	RMR	99.00007.250	250	16	0,5-2,5
236-744	RosTesT	B09523	250	16	0,08-2,5
236-744	SEMKO	9411003	400		2,5
236-744	UL	E45172	300	15	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected