


Product information

6 ports, 5-15 M - ASBM 6/LED 3-344/5 M

Industrial Connecting Solutions:I/O Modules:Passive distributors:M8 Passive Distributors:fixed control cable:4-12 ports, actuator/sensor distribution box:6 ports, 5-15 M

https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205059/en/ASBM_06LED_3_344_05/ustate

Name	6 ports, 5-15 M
	
	Miniature actuator/sensor distribution box, 6-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 5 meter.
Delivery informations	
Availability	available
Product description	
Type	ASBM 6/LED 3-344/5 M
Order No.	65352
Description	Miniature actuator/sensor distribution box, 6-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 5 meter.
Number of contacts	3 (M8)
Version	6 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✓
Environmental conditions	
Environmental temperature	-25 °C ... 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	PBT
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
Approvals	
Approvals	cURus
Cable	
Cable length	5 m
Cable number	344
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	6.0 mm
Number of conductors	8


Industrial Connecting Solutions:I/O Modules:Passive distributors:M8 Passive Distributors:fixed control cable:4-12 ports, actuator/sensor distribution box:6 ports, 5-15 M

https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205059/en/ASBM_06LED_3_344_05/ui:state

Cable design	8 x 0.25 mm ²
Conductor design	finest stranded, 32 x Ø 0.1 mm
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets ZBR 5/10: attachable labels, 5 pieces

Picture

Drawing

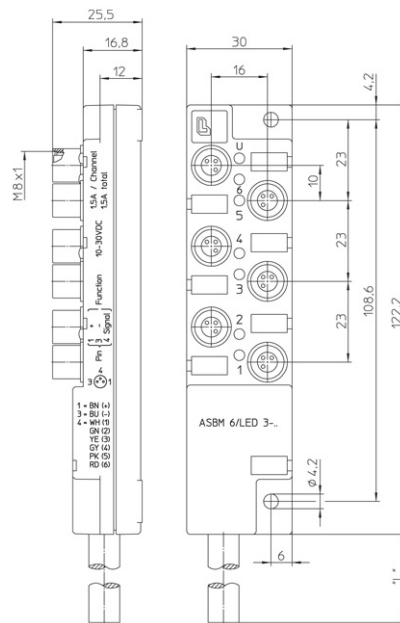

Belden Deutschland GmbH
 Im Gewerbepark 2
 58579 Schalksmühle
 Germany
 Phone: +49 7127/14-1806
 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.