

Wiha SoftFinish® electric.


The Safe and Comfortable Insulated VDE Screwdriver.



 **AC 1000V**
IEC 60900:2004



The insulation is moulded directly onto the blade and cannot be detached from the handle.

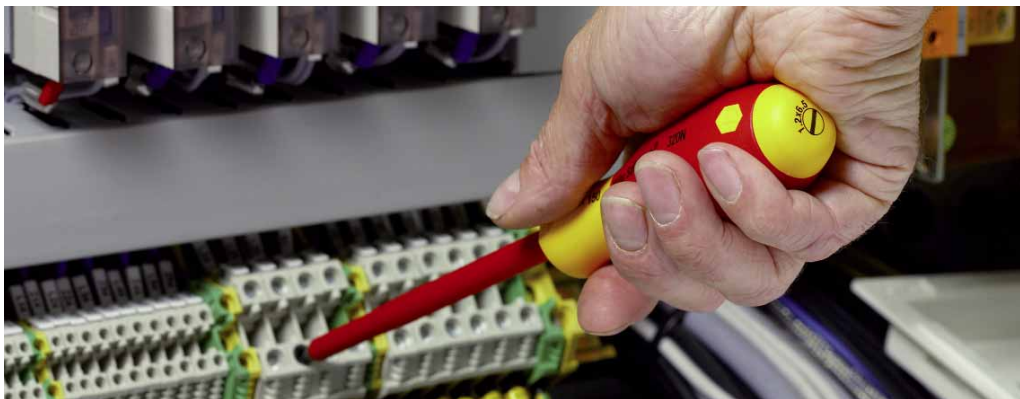

Easily and safely, the high-quality blade insulation protects the user when working with live components.

Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1500 V DC or 1000 V AC. To maintain this safety, each screwdriver of the SoftFinish®electric series is individually tested in a water bath at 10.000 Volts according to EN/IEC 60900:2004.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications. Furthermore, the exclusive SoftFinish® handle shape allows maximum user comfort.



The right tool at a glance, thanks to the printed screw symbol on the handle end.



Wiha SoftFinish® electric:

- Insulation moulded directly onto blade
- Awarded the GS symbol for tested safety.
- Safety when working up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 Volts according to EN/IEC 60900:2004
- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Imprinted screw symbol on handle end for fast identification

Wiha SoftFinish® electric.

The Safe and Comfortable Insulated VDE Screwdriver.

For Slotted and Phillips Screws.



320N SoftFinish® electric Slotted Screwdriver.

Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7437, DIN 5264, ISO 2380. Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⌀	↔	⊖	↔	↔	↔	£
00819 2	2.0	60	0.4	164	23	10	3.95
00820 8	2.5	75	0.4	179	23	10	3.86
00821 5	3.0	100	0.5	204	23	10	3.86
00822 2	3.5	100	0.6	204	23	10	4.03
00823 9	4.0	100	0.8	211	30	10	4.96
00824 6	4.5•	125	1.0	236	30	10	5.63
00825 3	4.5•	175	1.0	286	30	5	6.22
00826 0	5.5	125	1.0	243	36	10	6.38
00827 7	5.5•	175	1.0	293	36	5	7.06
00828 4	6.0•	150	1.2	268	36	10	6.72
00829 1	6.5	150	1.2	268	36	10	7.14
00830 7	8.0	175	1.2	299	41	10	8.40
00831 4	8.0	175	1.6	299	41	10	8.40
00832 1	10.0	200	1.6	324	41	10	10.75

• Additional dimension. Non-DIN size.



321N SoftFinish® electric Phillips Screwdriver.

Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7438, ISO 8764. Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⊕	↔	↔	↔	↔	£
00846 8	PH0	60	164	23	10	4.54
00847 5	PH1	80	191	30	10	5.46
00848 2	PH2	100	218	36	10	6.72
00849 9	PH3	150	268	41	10	8.40
00850 5	PH4	200	318	41	5	11.93

For Pozidriv and TORX® Screws.



324 SoftFinish® electric Pozidriv Screwdriver.

Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7438, ISO 8764. Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⊕	↔	↔	↔	↔	£
00877 2	PZ0	60	164	23	10	5.04
00878 9	PZ1	80	191	30	10	6.05
00879 6	PZ2	100	218	36	10	7.22
00880 2	PZ3	150	324	41	5	9.66



325 SoftFinish® electric TORX® Screwdriver.

Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⊕	↔	↔	↔	↔	£
03760 4	T5	60	164	23	10	6.97
03761 1	T6	60	164	23	10	5.80
03762 8	T7	60	164	23	10	5.80
00881 9	T8	60	164	23	10	5.80
00882 6	T9	60	164	23	10	6.05
00883 3	T10	60	164	23	10	6.30
00884 0	T15	80	191	30	10	6.38
00885 7	T20	80	191	30	10	6.47
00886 4	T25	80	198	36	10	6.64
00887 1	T27	100	218	36	10	6.97
00888 8	T30	100	218	36	10	7.31
00889 5	T40	150	274	41	5	7.90
03763 5	T45	150	274	41	5	8.99

Wiha SoftFinish® electric.

The Safe and Comfortable Insulated VDE Screwdriver.

For Hex Screws and Hex Socket Screws.



322 SoftFinish® electric Hex Nut Driver.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7445. Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Ø	↔	↔	↔	↔	↔	£
00853	6	4	125	236	30	10.2	7.31
00855	0	5	125	236	30	11.2	7.31
00856	7	5.5	125	236	30	11.2	7.39
00857	4	6	125	236	30	12.2	7.39
00858	1	7	125	243	36	14.5	8.65
00859	8	8	125	243	36	15.2	9.16
00860	4	9	125	243	36	16.0	9.74
00861	1	10	125	243	36	17.2	10.00
00862	8	11	125	243	41	19.2	11.76
00863	5	12	125	243	41	20.2	12.26
00864	2	13	125	243	41	22.2	13.52
00865	9	14	125	243	41	23.2	14.11
00866	6	15	125	243	41	25.2	16.80
00867	3	16	125	243	41	25.2	16.80
00868	0	17	125	243	41	27.2	16.04



323N SoftFinish® electric Hex Screwdriver.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Ø	↔	↔	↔	↔	£
30361	7	2.5	75	179	23	5.63
30362	4	3.0	75	179	23	5.96
30363	1	4.0	75	186	30	6.80
30364	8	5.0	75	186	30	7.31
30365	5	6.0	100	218	36	8.06
30366	2	8.0	100	218	36	9.83

Hex and Nut Driver Electric.



334N Hex Driver Electric with T-Handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Wiha T-Handle.

Standards: Manufactured acc. to EN/IEC 60900:2004. GS-Mark.

Application: For high torque transfer with minimal effort, especially for all work on or around electrical components up to 1,000 V AC.

Order-No.	Ø	↔	↔	↔	↔	↔	£
27928	8	4	150	176	80	26	4.83
27929	5	5	150	182	100	32	5.39
27930	1	6	150	182	100	32	6.04
27931	8	8	150	182	100	32	6.92



336N Nut Driver Electric with T-Handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Insulation moulded directly onto blade.

Handle: Wiha T-Handle.

Standards: Similar to DIN 7440. Manufactured acc. to EN/IEC 60900:2004. GS-Mark.

Application: For high torque transfer with minimal effort, especially for all work on or around electrical components up to 1,000 V AC.

Extra: Recess in shank to accommodate for long screws.

Order-No.	Ø	↔	↔	↔	↔	↔	£
27932	5	8	200	232	100	32	13.77
27933	2	10	230	262	100	32	15.05
27934	9	13	230	262	100	32	16.34
27935	6	17	230	268	120	38	17.87

Slotted/Phillips Sets and Slotted/Pozidriv Set.



320N K6 SoftFinish® electric Slotted/Phillips Screwdriver Set, 6 pcs.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series					£
00833 8	320N K6					29.06
⓪	320N	3.0x100	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			



320N ZK6 SO SoftFinish® electric Slotted/Pozidriv Screwdriver Set, 6 pcs.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Order-No.	Series					£
25477 3	320N ZK6 SO					28.64
⓪	320N	2.5x75	3.5x100	4.5x125	5.5x125	
⊕	324	PZ1x80	PZ2x100			



320N K7 SoftFinish® electric Slotted/Phillips Screwdriver Set, 7 pcs.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series					£
00834 5	320N K7					30.07
⓪	320N	2.5x75	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			
⓪	255-3	3.0x60				

TORX® and Nut Driver Set.



325N K6 01 SoftFinish® electric TORX® Screwdriver Set, 6 pcs.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series					£
29465 6	325N K6 01					35.70
⊕	325	T8x60	T9x60	T10x60	T15x80	
		T20x80	T25x80			



322 K5 SoftFinish® electric Hex Nut Driver Set, 5 pcs.
Insulation 1,000 V AC, VDE-tested and with GS Mark.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade. Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7445., Manufactured acc. to EN/IEC 60900:2004.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				£
29466 3	322 K5				46.96
⊙	322	5.5x125	7x125	8x125	
		10x125	13x125		

PRODUCT DATASHEET

is brought to you by



[SOS electronic](https://www.soselectronic.com/)

distribution of electronic components

Click to view availability, pricing and lifecycle information.

Visit <https://www.soselectronic.com/>