



HAHN - Elektrobau GmbH & Co. KG

Data sheet: BV 201 0128

Size 1 a: height 15 mm

Type BV 201...


0,35 VA

shipping unit per box: **50 pcs.** / temperature class: **ta 70/B** / weight: **approx. 25g**

- absolutely short circuit proof
- **excellent function at thermal changes, vacuum casted**
 - maximum safety and long-term durability
- **with VDE-, ENEC 10-, UL-, and CSA certificates**
 - minimum size, maximum capacity
- **self-extinguishing cast housing and sealing material**
 - individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV 201 0128	0,35	230	1-4	6 V 58 mA	6-7	10,0

Certificates

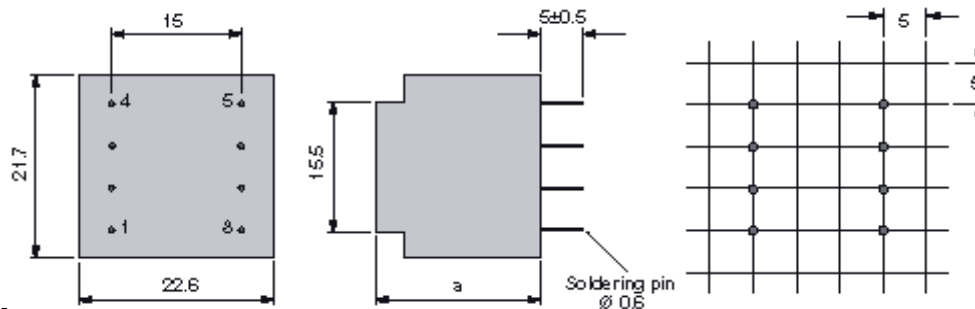

Dimensions with no indication of tolerances: $\pm 0,3$ mm