





























Single-Conductor Modular Terminal Blocks 2.5 mm²/AWG 14 "s", Series 235, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in

<p>Pin spacing 5/5.08 mm / 0.2 in 0.5 – 2.5 mm² "s" ① (1.5 mm² "s" w. push bu.) 250 V/4 kV/3, 10 A 500 V/4 kV/2, 10 A  9 – 10 mm / 0.37 in</p>	<p>Pin spacing 7.5/7.62 mm / 0.3 in 0.5 – 2.5 mm² "s" ① (1.5 mm² "s" w. push bu.) 400 V/6 kV/3, 10 A 800 V/6 kV/2, 10 A  9 – 10 mm / 0.37 in</p>	<p>Pin spacing 10/10.16 mm / 0.4 in 0.5 – 2.5 mm² "s" ① (1.5 mm² "s" w. push bu.) 500 V/6 kV/3, 10 A 1000 V/6 kV/2, 10 A  9 – 10 mm / 0.37 in</p>
<p>*                     </p>		

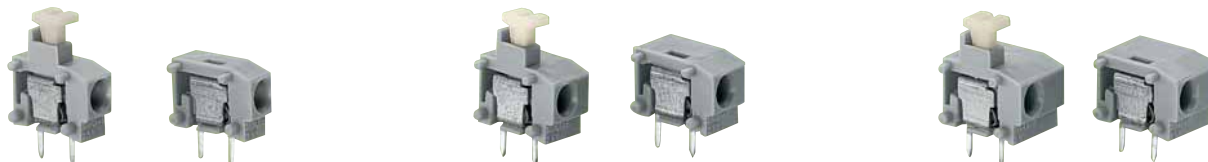


Color	Item No.	Pack.-unit pcs	Color	Item No.	Pack.-unit pcs	Color	Item No.	Pack.-unit pcs
Single-conductor modular terminal blocks with push button ①, 2 solder pins/pole			Single-conductor modular terminal blocks with push button ①, 2 solder pins/pole			Single-conductor modular terminal blocks with push button ①, 2 solder pins/pole		
grey	235-401/331-000	800 (8 x 100)	grey	235-501/331-000	600 (6 x 100)	grey	235-801/331-000	400 (4 x 100)
red	235-740/331-000	800 (8 x 100)	dark grey	235-752/331-000	600 (6 x 100)	dark grey	235-762/331-000	400 (4 x 100)
yellow	235-741/331-000	800 (8 x 100)	light grey	235-753/331-000	600 (6 x 100)	light grey	235-763/331-000	400 (4 x 100)
dark grey	235-742/331-000	800 (8 x 100)	blue	235-754/331-000	600 (6 x 100)	blue	235-764/331-000	400 (4 x 100)
light grey	235-743/331-000	800 (8 x 100)	white	235-755/331-000	600 (6 x 100)	white	235-765/331-000	400 (4 x 100)
blue	235-744/331-000	800 (8 x 100)	orange	235-756/331-000	600 (6 x 100)	orange	235-766/331-000	400 (4 x 100)
white	235-745/331-000	800 (8 x 100)	light green	235-757/331-000	600 (6 x 100)	light green	235-767/331-000	400 (4 x 100)
orange	235-746/331-000	800 (8 x 100)	black	235-758/331-000	600 (6 x 100)	black	235-768/331-000	400 (4 x 100)
light green	235-747/331-000	800 (8 x 100)	Single-conductor modular terminal blocks, 2 solder pins/pole			Single-conductor modular terminal blocks, 2 solder pins/pole		
black	235-748/331-000	800 (8 x 100)	grey	235-501	600 (6 x 100)	grey	235-801	400 (4 x 100)
violet	235-749/331-000	800 (8 x 100)	dark grey	235-752	600 (6 x 100)	dark grey	235-762	400 (4 x 100)
Single-conductor modular terminal blocks, 2 solder pins/pole			light grey	235-753	600 (6 x 100)	light grey	235-763	400 (4 x 100)
grey	235-401	800 (8 x 100)	blue	235-754	600 (6 x 100)	blue	235-764	400 (4 x 100)
dark grey	235-742	800 (8 x 100)	orange	235-756	600 (6 x 100)	orange	235-766	400 (4 x 100)
light grey	235-743	800 (8 x 100)	light green	235-757	600 (6 x 100)	light green	235-767	400 (4 x 100)
blue	235-744	800 (8 x 100)	② suitable for Ex i applications			② suitable for Ex i applications		
orange	235-746	800 (8 x 100)						
light green	235-747	800 (8 x 100)						

Accessories (marker strips see section 11)

	End plates, snap-on type, 1 mm/0.039 in thick			End plates, snap-on type, 1 mm/0.039 in thick			
	grey	235-100		100	orange	235-600	100
	dark grey	235-200		100	violet	235-650	100
	light grey	235-300		100	light green	235-700	100
	blue	235-400		100	red	235-800	100
	black	235-500		100	white	235-850	100
yellow	235-550	100					
	Spacer, for doubling the pin spacing						
grey	235-701	100					

Dimensions (in mm)

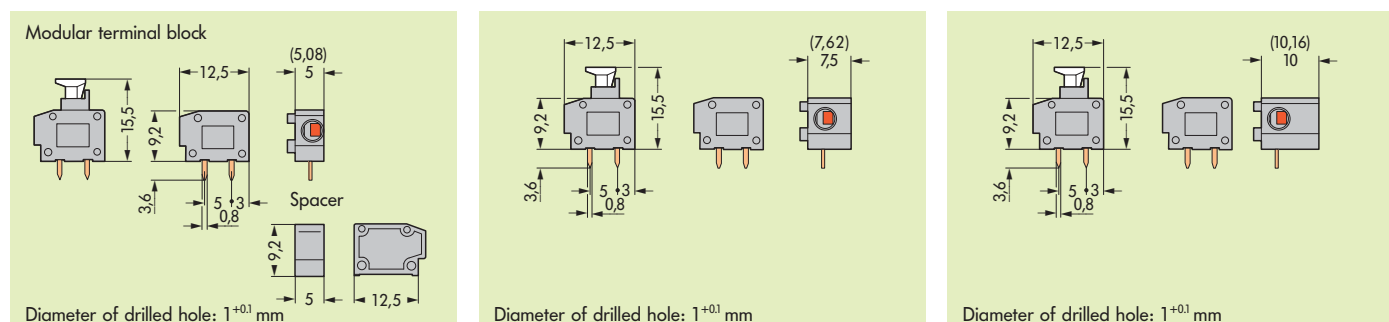

* Approvals with corresponding ratings see pages 12.3 ff.