

## Surface Mount LEDs

Order code	Manufacturer code	Description
72-8500	KP-1608IT	KP-1608IT LED 0603 HE RED (RC)
72-8505	KP-1608SRT	KP-1608SRT LED 0603 SUPER RED (RC)
72-8510	KP-1608SGT	KP-1608SGT LED 0603 GREEN (RC)
72-8515	KP-1608YT	KP-1608YT 0603 SMT LED YEL TRANSPRNT RC
72-8530	KP-1608IT.	KP-1608IT RL2000 LED 0603 HE RED (RC)
72-8535	KP-1608SRT.	KP-1608SRT RL2000 LED 0603 SUPER RED RC
72-8540	KP-1608SGT.	KP-1608SGT RL2000 LED 0603 GREEN (RC)
72-8545	KP-1608YT.	KP-1608YT RL 2000 0603 YELLOW SMT LED RC

Surface Mount LEDs	Page 1 of 7
The enclosed information is believed to be correct, Information may change without notice due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.	Revision A 20/02/2007

# Kingbright®

## 1.6x0.8mm SMD CHIP LED LAMPS

KP-1608 SERIES

### Features

- 1.6mmx0.8mm SMT LED. 1.1mm THICKNESS.
- LOW POWER CONSUMPTION.
- WIDE VIEWING ANGLE.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.

### Description

The Bright Red source color devices are made with Gallium Phosphide Red Light Emitting Diode.


The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diodes.

### Package Dimensions

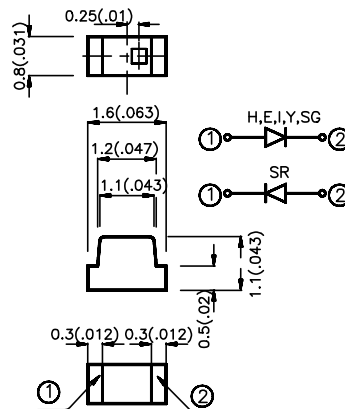

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.1(0.004)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subjected to change without notice.

### Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20 mA		Viewing Angle <b>2<math>\theta</math>1/2</b>
			Min.	Typ.	
KP-1608HD	BRIGHT RED (GaP)	RED DIFFUSED	0.8	1.25	120°
KP-1608HC	BRIGHT RED (GaP)	WATER CLEAR	0.8	1.25	120°
KP-1608HT	BRIGHT RED (GaP)	RED TRAS.	0.8	1.25	120°
KP-1608ID	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	5	12.5	120°
KP-1608EC	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	5	12.5	120°
KP-1608IT	HIGH EFFICIENCY RED (GaAsP/GaP)	RED TRANS.	5	12.5	120°
KP-1608YD	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	3.2	8	120°
KP-1608YC	YELLOW (GaAsP/GaP)	WATER CLEAR	3.2	8	120°
KP-1608YT	YELLOW (GaAsP/GaP)	YELLOW TRANS.	3.2	8	120°
KP-1608SRD	SUPER BRIGHT RED (GaAlAs)	RED DIFFUSED	40	70	120°
KP-1608SRC	SUPER BRIGHT RED (GaAlAs)	WATER CLEAR	40	70	120°
KP-1608SRT	SUPER BRIGHT RED (GaAlAs)	RED TRANS.	40	70	120°
KP-1608SGD	SUPER BRIGHT GREEN (GaP)	GREEN DIFFUSED	3.2	12.5	120°
KP-1608SGC	SUPER BRIGHT GREEN (GaP)	WATER CLEAR	3.2	12.5	120°
KP-1608SGT	SUPER BRIGHT GREEN (GaP)	GREEN TRNS.	3.2	12.5	120°

#### Note:

1.  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


### Electrical / Optical Characteristics at T<sub>A</sub>=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
$\lambda_{peak}$	Peak Wavelength	Bright Red High Efficiency Red Yellow Super Bright Red Super Bright Green	700 625 590 660 565		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	Bright Red High Efficiency Red Yellow Super Bright Red Super Bright Green	45 45 35 20 30		nm	IF=20mA
C	Capacitance	Bright Red High Efficiency Red Yellow Super Bright Red Super Bright Green	40 12 10 95 45		pF	VF=0V;f=1MHz
V <sub>F</sub>	Forward Voltage	Bright Red High Efficiency Red Yellow Super Bright Red Super Bright Green	2.0 2.0 2.1 1.85 2.2	2.5 2.5 2.5 2.5 2.5	V	IF=20mA
I <sub>R</sub>	Reverse Current	All	10		uA	VR = 5V


### Absolute Maximum Ratings at T<sub>A</sub>=25°C

Parameter	Bright Red	High Efficiency Red	Yellow	Super Bright Red	Super Bright Green	Units
Power dissipation	105	105	105	100	105	mW
DC Forward Current	25	30	30	30	25	mA
Peak Forward Current [1]	150	150	150	150	150	mA
Reverse Voltage	5	5	5	5	5	V
Operating/Storage Temperature	-40 °C To +85 °C					
Lead Soldering Temperature [2]	230 °C For 3 Seconds					


Note:  
1. 1/10 Duty Cycle, 0.1ms Pulse Width.

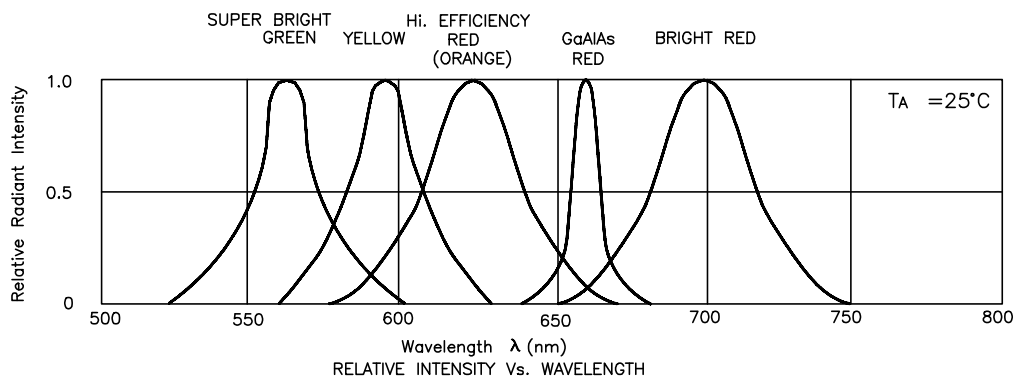


Bright Red KP-1608HD, KP-1608HC, KP-1608HT

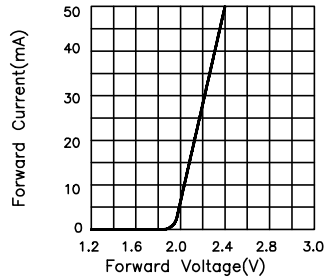


FORWARD CURRENT Vs. FORWARD VOLTAGE

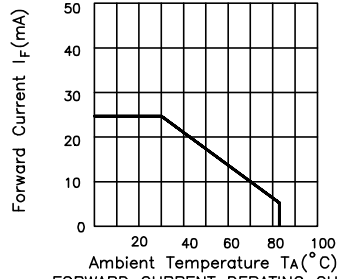

FORWARD CURRENT DERATING CURVE

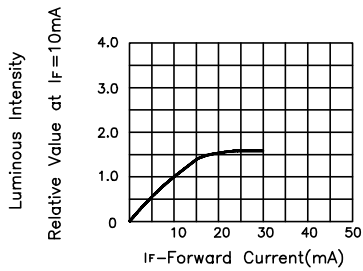


LUMINOUS INTENSITY Vs. FORWARD CURRENT

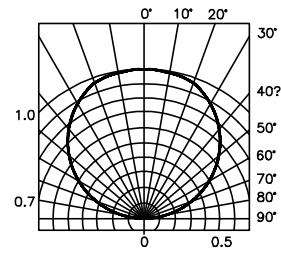


SPATIAL DISTRIBUTION


High Efficiency Red KP-1608ID, KP-1608EC, KP-1608IT

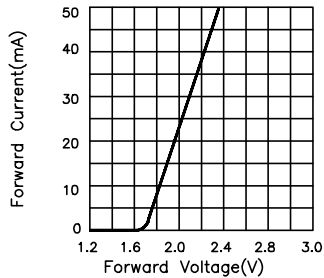


FORWARD CURRENT Vs. FORWARD VOLTAGE

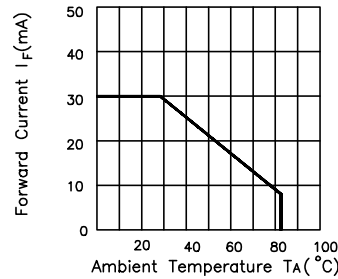

FORWARD CURRENT DERATING CURVE

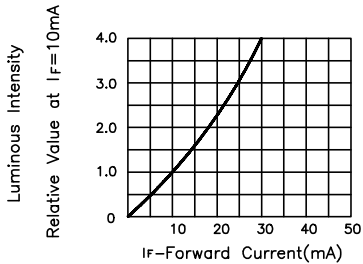


LUMINOUS INTENSITY Vs. FORWARD CURRENT

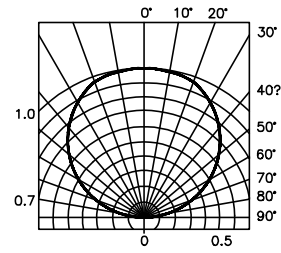


SPATIAL DISTRIBUTION


Yellow KP-1608YD, KP-1608YC, KP-1608YT

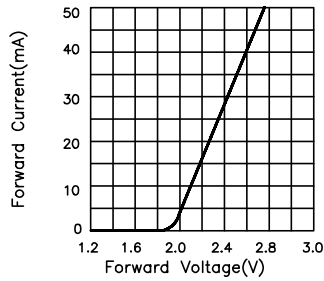


FORWARD CURRENT Vs. FORWARD VOLTAGE

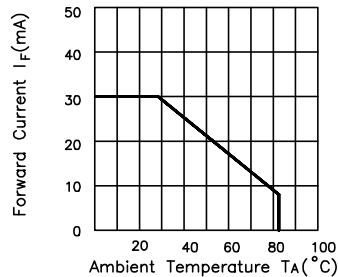

FORWARD CURRENT DERATING CURVE

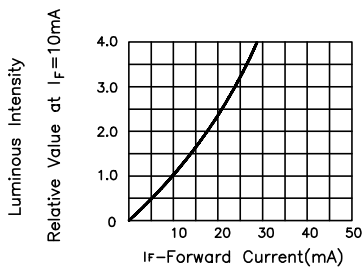


LUMINOUS INTENSITY Vs. FORWARD CURRENT

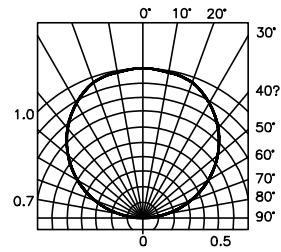


SPATIAL DISTRIBUTION


Super Bright Red KP-1608SRD, KP-1608SRC, KP-1608SRT

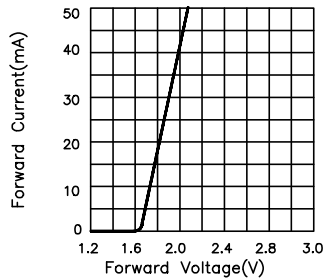


FORWARD CURRENT Vs. FORWARD VOLTAGE

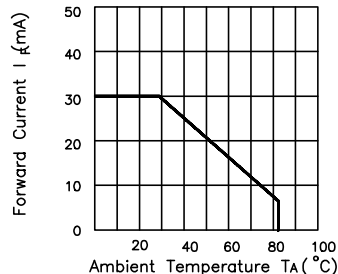

FORWARD CURRENT DERATING CURVE

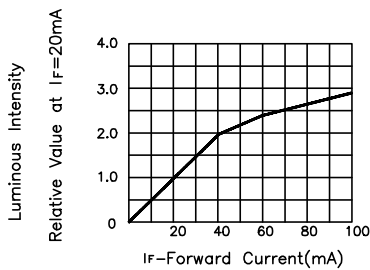


LUMINOUS INTENSITY Vs. FORWARD CURRENT

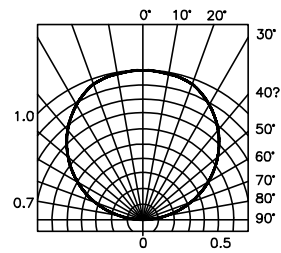


SPATIAL DISTRIBUTION


Super Bright Green KP-1608SGD, KP-1608SGC, KP-1608SGT

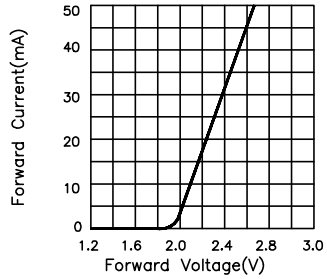


FORWARD CURRENT Vs. FORWARD VOLTAGE

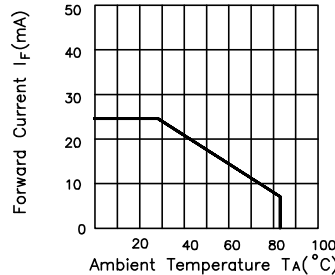

FORWARD CURRENT DERATING CURVE

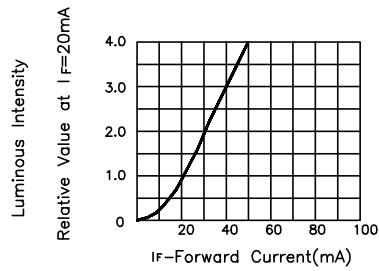


LUMINOUS INTENSITY Vs. FORWARD CURRENT

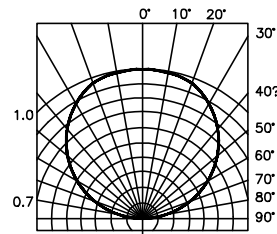


SPATIAL DISTRIBUTION

KP-1608 Series SMT Reflow Soldering Instructions

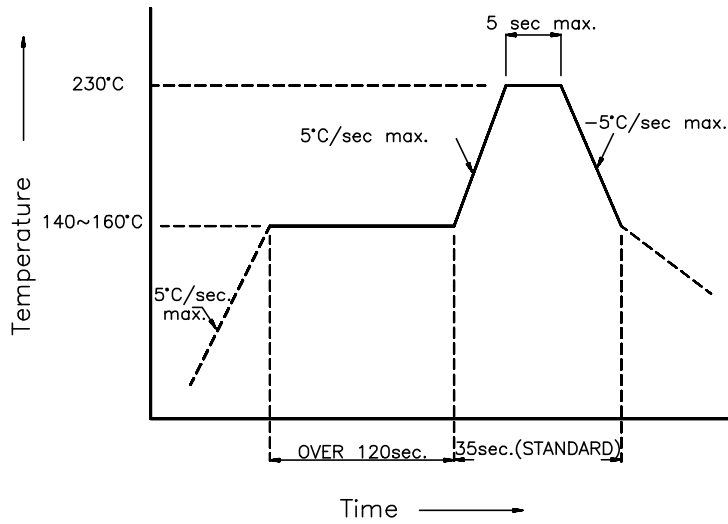


# KP-1608 Series Recommended Soldering Pattern

FOR REFLOW SOLDERING

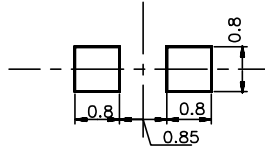

## KP-1608 Series Tape Specifications

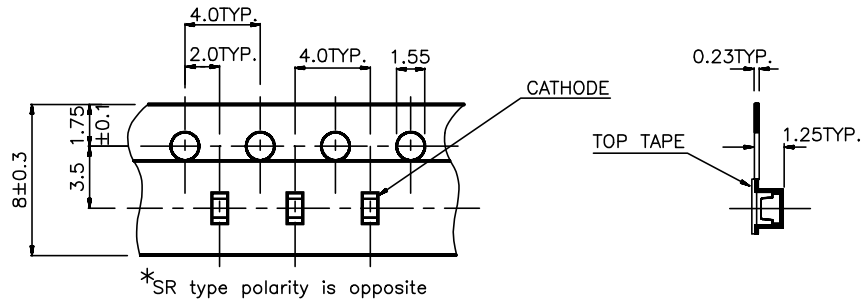

(Units : mm)