

Data sheet

231-105/037-000

**FEMALE PLUG WITH LOCKING LEVER
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING
FLANGES**



Technical data

Package size 50 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	5
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Weight	10.57 g
Color	grey
No. of connection Points	5
No. of potentials	5
Height	14.3 mm
Height	0.563 in
Width	41.6 mm
Width	1.638 in

Data sheet**231-105/037-000****FEMALE PLUG WITH LOCKING LEVER
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING
FLANGES**

Depth	29.6 mm
Depth	1.165 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in
xxx-xxx/033-000	Strain relief plate 20 mm

Data sheet

231-105/037-000

FEMALE PLUG WITH LOCKING LEVER PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING FLANGES

Approval	Voltage	Current	Approval number	Notes
BBJ	250	16	B/12/699/03	
BV	400	16	11915/A0	
CCA	400	16	DK2127	
CSA	300	15	154112-1465035	
CSA	300	15	18677-30	
DEMKO	250	16	88126	
GL	400	16	17296-00HH	
KEMA	250	16	98.2486.01	
KR	250/400	12/16	HMB05880-EL003	
LR	400	16	96/20035	
NEMKO	250		P94101840	
RMR	400	16	99.00007.250	
RosTesT	400	16	B09523	
UL	600	15	E45171	
UL	300	15	E45172	
VDE	250	12	5675ÜGBI.2	

Data sheet

231-105/037-000

**FEMALE PLUG WITH LOCKING LEVER
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING
FLANGES**

Accessories


Item number

COMB TYPE JUMPER BAR FOR PIN SPACING 5MM / 0.197 IN AND 5.08 MM / 0.2 IN	231-902
FIXING SCREW FOR CABLE STRAP	209-176
ISULATION STOP 0.08 - 0.2 MM ² / 0.2 MM ² S	231-670
ISULATION STOP 0.25 - 0.5 MM ²	231-671
ISULATION STOP 0.75 - 1 MM ²	231-672
LOCKOUT CAPS FOE COVERING UNUSED CLAMPING UNITS	231-668
OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
OPERATING TOOL FOR FEMALE AND MALE CONNECTORS WITH CAGE CLAMP	210-250
OPERATING TOOL TO CONNECT JUMPERS	209-132
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	231-131
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SNAP-ON TYPE RELIEF HOUSING CONSISTING OF: STRAIN RELIEF SUPPORT/ HOUSING	232-605
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137
TEST PLUG FOR FEMALE PLUGS FOR PIN SPACING 5MM / 0.197 IN AND 5.08 MM / 0.2 IN	231-661

Data sheet

231-105/037-000

FEMALE PLUG WITH LOCKING LEVER
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING FLANGES

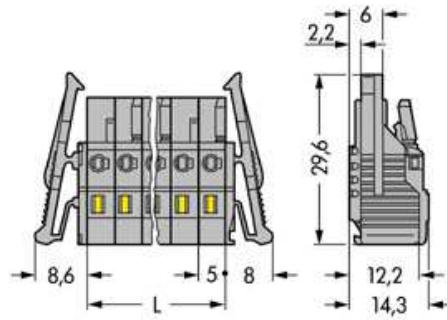

Data sheet

231-105/037-000

**FEMALE PLUG WITH LOCKING LEVER
PIN SPACING 5 MM / 0.197 IN WITH CODIG FINGERS WITH INTEGRATED FIXING
FLANGES**

L = No.of poles x pin spacing