

## Single-In-Line Reed Relays



## DESCRIPTION

Single-In-Line Reed Relays reduce the required space to a minimum. Requiring only half the PCB area of the DIP or DIL series, the SIL relays offer all the advantages of Reed Technology.

## CHARACTERISTICS


- High resistance coils of up to 2000  $\Omega$  at 12 VDC
- Breakdown voltage coil / contact of up to 4.25 kVDC
- Contact form 1A, 1B or 1C

## FEATURES

- Magnetic shield available
- High resistance version
- Other coil resistances available
- Option with coax screen for Z=50 Ohm Impedance

## DIMENSIONS


All dimensions in mm [inch]

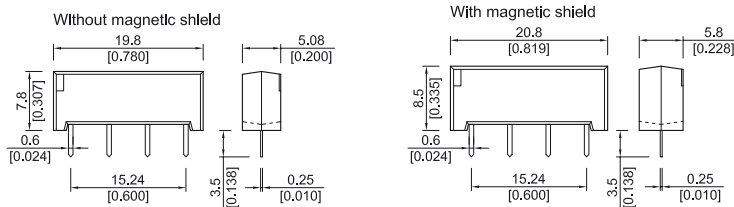


## PIN OUT

View from top of component, 2.54mm [0.10"] pitch grid


71 Form 1A



71 Form 1B



51 Form 1C



"+" by option with diode

RELAY DATA

All Data at 20° C	Switch Model → Contact Form →	Switch 72 Form A			Switch 75 Form A			
Contact Ratings	Conditions	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Switching Power	Any DC combination of V & A not to exceed their individual max.'s		15				10	W
Switching Voltage	DC or peak AC		200				500	V
Switching Current	DC or peak AC		1.0				0.5	A
Carry Current	DC or peak AC		1.25				1.0	A
Static Contact Resistance	w/ 0.5 V & 10mA		150				200	mΩ
Dynamic Contact Resistance	Measured w/ 0.5 V & 50mA , 1.5 ms after closure		200				200	mΩ
Insulation Resistance across Contacts	Across Contact Coil - Contact	10 <sup>13</sup>			10 <sup>13</sup>			Ω
Breakdown Voltage across Contact	Across Contact Coil - Contact	250 1500			1500* 1500			VDC
Operation Time incl. Bounce	Nominal voltage		0.7				0.5	ms
Release Time	with no coil suppression		0.1				0.1	ms
Capacitance	Across Contact Coil - Contact			0.2 2.0			0.4 2.0	pF
<b>Life Expectance</b>								
Switch Voltage 5V - 10 mA	DC <10 pF stray cap.		1000				500	10 <sup>6</sup> Cycles
For other load requirements, see test section on Page 112.								
<b>Environmental Data</b>								
Shock Resistance	1/2 sinus wave duration 11 ms			50			30	g
Vibration Resistance	From 10 - 2000 Hz			20			10	g
Ambient Temperature	10°C/ minute max. allowable	-20		70	-20		70	°C
Stock Temperature	10°C/ minute max. allowable	-35		95	-35		95	°C
Soldering Temperature	5 sec.			260			260	°C
* 600 VDC with 5V coil, 1000 VDC with 12V coil.								

Single-In-Line  
Reed Relays

## RELAY DATA

All Data at 20° C	Switch Model → Contact Form →	Switch 84 Form A			Switch 90 Form B/C			
Contact Ratings	Conditions	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Switching Power	Any DC combination of V & A not to exceed their individual max.'s			10			3	W
Switching Voltage	DC or peak AC			400			175	V
Switching Current	DC or peak AC			0.5			0.25	A
Carry Current	DC or peak AC			1.0			1.2	A
Static Contact Resistance	w/ 0.5 V & 10mA			150			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5 V & 50mA , 1.5 ms after closure			200			250	mΩ
Insulation Resistance across Contacts	Across Contact Coil - Contact	10 <sup>12</sup> 10 <sup>12</sup>	10 <sup>13</sup>		10 <sup>9</sup> 10 <sup>12</sup>			Ω
Breakdown Voltage across Contact	Across Contact Coil - Contact	700 1500			200 1500			VDC
Operation Time incl. Bounce	Nominal voltage			2.0			0.7	ms
Release Time	with no coil suppression			0.1			1.5	ms
Capacitance	Across Contact Coil - Contact		0.7 2.0			1.0 4.0		pF
<b>Life Expectance</b>								
Switch Voltage 5V - 10 mA	DC <10 pF stray cap.		200			100		10 <sup>6</sup> Cycles
For other load requirements, see test section on Page 112.								
<b>Environmental Data</b>								
Shock Resistance	1/2 sinus wave duration 11 ms			50			50	g
Vibration Resistance	From 10 - 2000 Hz			20			20	g
Ambient Temperature	10°C/ minute max. allowable	-20		70	-20		70	°C
Stock Temperature	10°C/ minute max. allowable	-35		95	-35		95	°C
Soldering Temperature	5 sec.			260			260	°C
* 600 VDC with 5V coil, 1000 VDC with 12V coil.								

**COIL DATA**

Contact Form	Switch Model	Coil Voltage		Coil Resistance			Pull In Voltage	Drop Out Voltage	Nominal Coil Power
		VDC		Ω			VDC	VDC	mW
All Data at 20 °C		Nom.	Max.	Min.	Typ.	Max.	Max.	Min.	Typ.
		1A	72 75 84	5	7.5	450	500 (200)	550 (220)	3.5
12	16			900	1000	1100	8.4	1.8	145
15	7.5			1800	2000	2200	10.5	2.2	110
24	30			1800	2000	2200	16.8	3.6	290
72	5 HR		7.5	900	1000	1100	3.5	0.75	25
	12 HR		16	1800	2000	2200	8.4	1.8	70
	3		4.5	450	500	550	2.1	0.45	18
1B	90	5	7.5	180	200	220	3.5	0.75	125
		12	12	900	1000	1100	8.4	1.8	145
1C	90	5	7.5	180	200	220	3.5	0.75	125

\* The pull-in / drop out voltages and coil resistance will change at the rate of 0,4 % / °C.  
 \*\* Data in ( ) are valid for switch models 75 and 84.

**ORDER INFORMATION**

**Part Number Example**

SIL12 - 1A72 - 71L

12 is the nominal voltage  
 1A is the contact form  
 72 is the switch model  
 L is the option

**OPTIONS**

- L = No option
- M = With magnetic shield
- D = With diode and no magnetic shield
- Q = With diode and with magnetic shield

Series	Nominal Voltage	Contact Form	Switch Model	Pin Out	Options	High Resistance Version
SIL	XX -	1 X	XX -	XX	X	XX
Options	03, 05, 12, 15, 24*	1 A	72, 75, 84	71	L, M, D, Q	
	05, 12	1A	72	71	L, M, D, Q	HR
	05	1B	90	71	L, M, D, Q	
	05	1C	90	51	L, M, D, Q	

\* Other coil resistance available. Please consult factory.