


Data sheet

231-734/001-000

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 7.62 MM / 0.3 IN WITH CLOSED END MATING DIRECTION
PERPENDICULAR TO PCB**

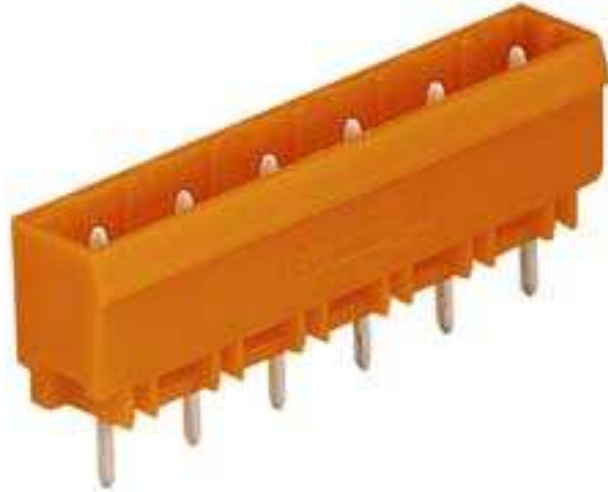

Technical data

Package size 100 pieces.

Pin spacing from	7.62 mm
Pin spacing from	0.3 in
pole count	4
Voltage UL	300 V
Voltage CSA	300 V
Current UL	10 A
Current CSA	10 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	12 A
Weight	1.7 g
Color	orange
Height	12 mm
Height	0.472 in
Width	30.86 mm
Width	1.215 in
Depth	8.4 mm
Depth	0.331 in

Data sheet

231-734/001-000

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 7.62 MM / 0.3 IN WITH CLOSED END MATING DIRECTION
PERPENDICULAR TO PCB**

Approval	Voltage	Current	Approval number	Notes
BBJ	400	12	B/12/699/03	
BV	400	16	11915/A0	
CCA	400	12	DK2127	
CSA	300	10	154112-1465035	
CSA	300	10	18677-30	
CSM	400	12	017956	
DEMKO	250		88126	
GL	400	12	17296-00HH	
KR	250/400	12/16	HMB05880-EL003	
LR	400	12	96/20035	
NEMKO	400		P94101840	
RMR	400	12	99.00007.250	
RosTesT	400	12	B09523	
UL	600	10	E45171	
UL	300	10	E45172	

Data sheet

231-734/001-000

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 7.62 MM / 0.3 IN WITH CLOSED END MATING DIRECTION
PERPENDICULAR TO PCB**


Accessories**Item number**

CODING KEY FOR SNAP IN	231-130
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SPACER FOR FORMATION OF GROUPS	231-500

Data sheet

231-734/001-000

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 7.62 MM / 0.3 IN WITH CLOSED END MATING DIRECTION
PERPENDICULAR TO PCB**

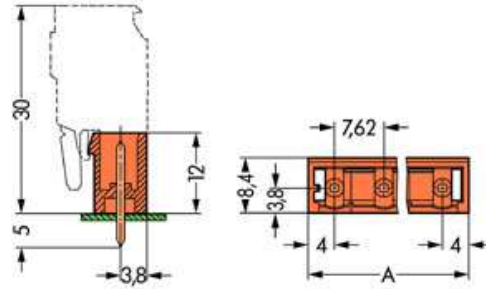

Data sheet

231-734/001-000

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 7.62 MM / 0.3 IN WITH CLOSED END MATING DIRECTION
PERPENDICULAR TO PCB**

Diameter of drilled hole: $1,4^{+0,1}$ mm

$A = (\text{No.of poles} - 1) \times \text{pin spacing} + 8 \text{ mm}$