



## Female headers

### Stamped contact spring (fork contact)

- matching male header **SLM** and **SLV**
- one row 1-36 contacts

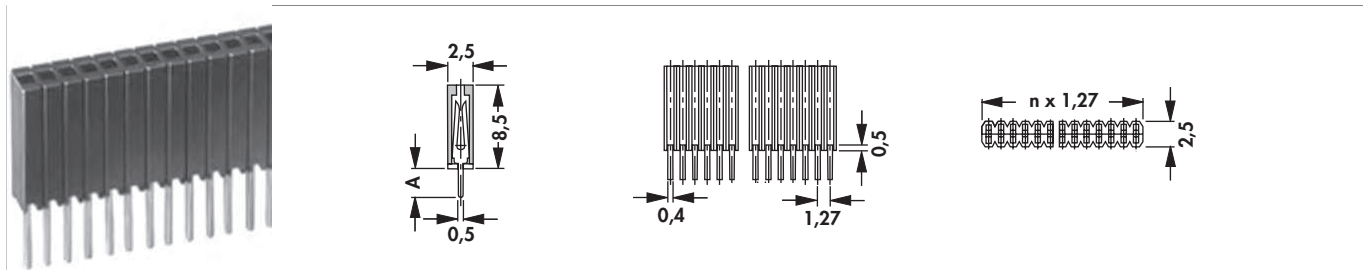


art. no.	dim. [mm]	art. no.	dim. [mm]
	A		A
<b>BLM KG 1 ...</b>	3.0	<b>BLM LG 1 ...</b>	5.1
<b>please indicate:</b>	<b>... no. of contacts one row 1 - 36</b>	<b>... surface of contact G = gold-plated Z = tin-plated</b>	

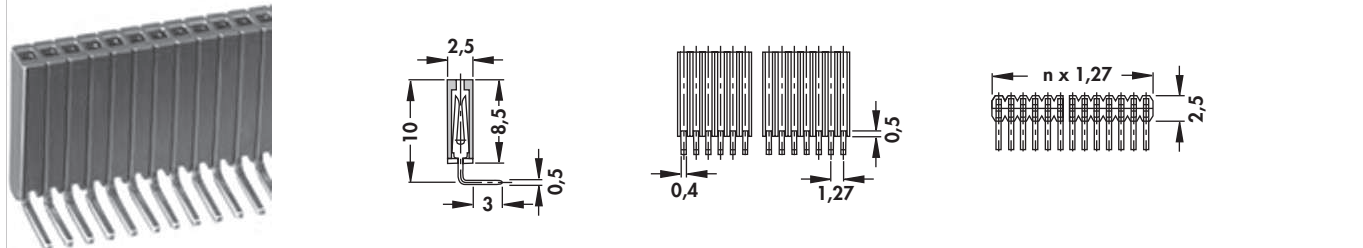

art. no.			
<b>BLM LA 1 ...</b>			
<b>please indicate:</b>	<b>... no. of contacts one row 1 - 36</b>	<b>... surface of contact G = gold-plated Z = tin-plated</b>	

- suitable for male header **SLV**
- two rows 4-72 contacts - grid spacing 1.27 x 2.54 mm

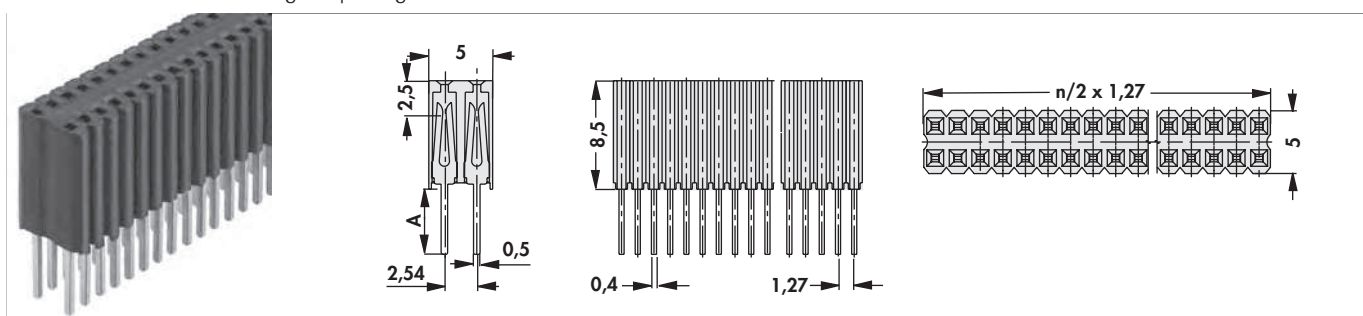

art. no.	dim. [mm]	art. no.	dim. [mm]
	A		A
<b>BLM KG 2 ...</b>	3.0	<b>BLM LG 2 ...</b>	5.1
<b>please indicate:</b>	<b>... no. of contacts two rows 4 - 72</b>	<b>... surface of contact G = gold-plated Z = tin-plated</b>	