

Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C - Item No.: 221-412

WAGO® online catalog / eShop

COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C

Item No.: 221-412



COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers; Max. operating temperature 85°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	221-412
EAN	4050821808435
Content	1
Order amount	100
Customer item number	

Notes

Technical data

Miscellaneous

Total number of connection points	2
Total number of potentials	1
Color	transparent
Ratings according to 1	EN 60664
Pollution degree (1)	2
Rated voltage EN (1) [V]	450 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	32 [A]

Technical data	
Connection technology (1)	CAGE CLAMP®
Conductor type (1)	solid + stranded
Cross section from (1) [mm ²]	0.2 [mm ²]
Cross section up to (1) [mm ²]	4 [mm ²]
Cross section from (1) [AWG]	24 [AWG]
Cross section up to (1) [AWG]	12 [AWG]
Conductor type (2)	fine-stranded
Cross section from (2) [mm ²]	0.14 [mm ²]
Cross section up to (2) [mm ²]	4 [mm ²]
Cross section from (2) [AWG]	24 [AWG]
Cross section up to (2) [AWG]	12 [AWG]
Stripped length from (1) [mm]	11 [mm]
Stripped length up to (1) [mm]	11 [mm]
Stripped length (1) [in]	0.43 [in]
Type of wiring	Side-entry wiring
Flammability rating per UL 94	V2
Weight [g]	1.78 [g]
Width [mm]	13.1 [mm]
Width [in]	0.516 [in]
Height [mm]	8.3 [mm]
Height [in]	0.327 [in]
Length [mm]	18.6 [mm]
Length [in]	0.732 [in]
Safety information 1	In grounded power lines

Approbation					
Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm ² , AWG]
221-412	CCA	2168803.01	450	32	0.20-4.00


Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers;
Max. operating temperature 85°C - Item No.: 221-412

Images & drawings



Printview: COMPACT splicing connectors for all wire types; 2-conductor wire block; with operating levers;
Max. operating temperature 85°C - Item No.: 221-412



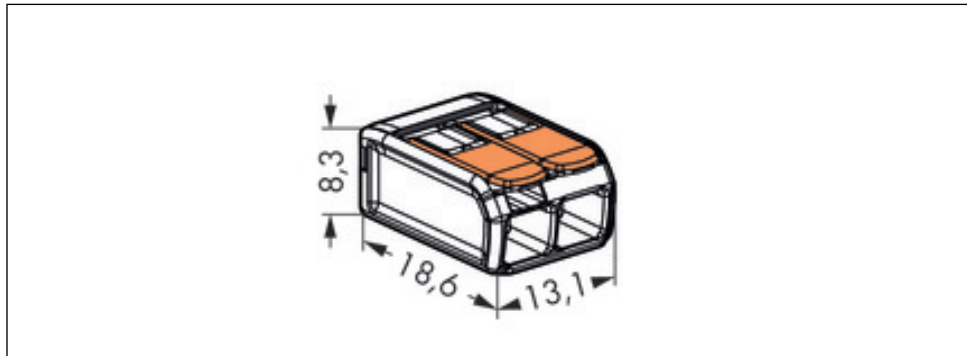

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.