THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

RATINGS:

CURRENT: 10 AMPS
BREAKDOWN VOLTAGE: 5700 V RMS
CONTACT RESISTANCE: 0.004 OHMS MAX.
CONTACT-TO-PANEL C: 2 pF NOMINAL

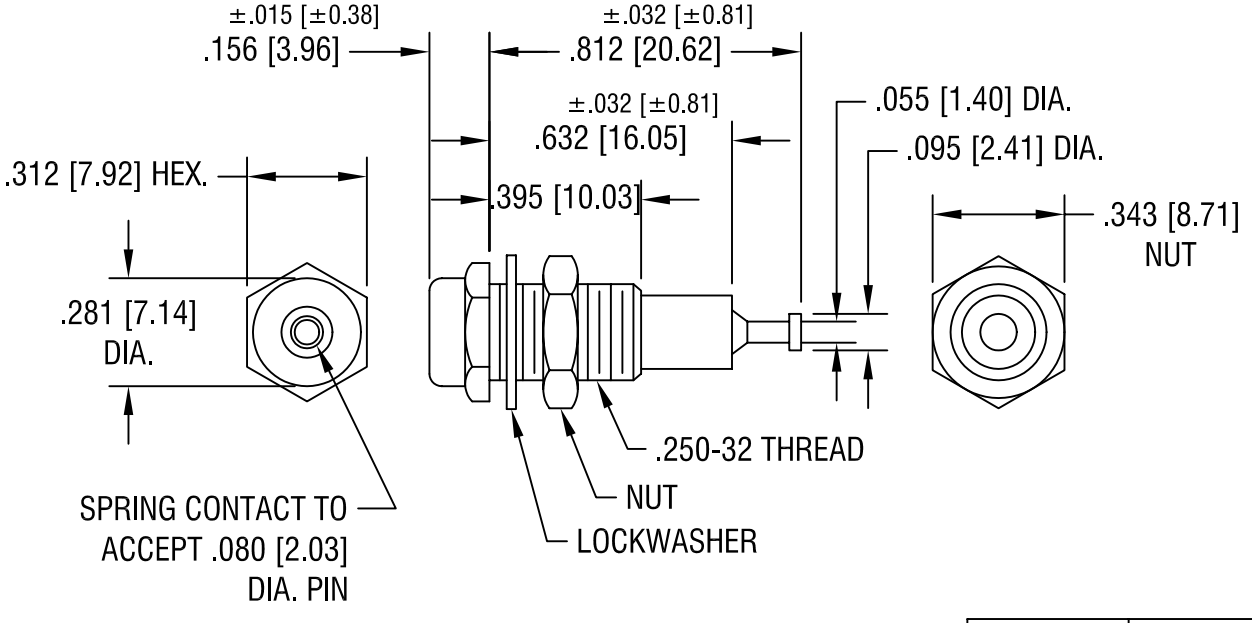

PART NO.	COLOR
6012	WHITE
6013	RED
6014	BLACK
6015	GREEN
6016	YELLOW
6017	BLUE

NOTES:

1. CONTACT:
   MAT'L - BRASS BODY WITH WRAP
   AROUND BERYLLIUM COPPER
   GOLD PLATE
   BODY:
   MAT'L - NYLON 6/6 PER ASTM D4066
2. SHELL, NUT/WASHER:
   BRASS, NICKEL PLATE.
   HARDWARE SUPPLIED
   UNASSEMBLED.

DATE	DESCRIPTION	REV.
2.5.03	CHANGE AS PER ECN 03-011	A

KEYSTONE ELECTRONICS CORP.
ASTORIA, N.Y. 11105-2017

PART NAME: INSULATED METAL-CLAD TIP JACK			
MATERIAL: AS NOTED			
FINISH: AS NOTED	DRN BY: BOONE	DATE: 12.7.82	
	APP'D: LN	SCALE: 2X	
TOLERANCES INCH [MM] DECIMAL ± .005 [± 0.15] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE: C/M	DWG NO.: 6012-6017	