


Item no.:	222-415
Product description:	COMPACT CONNECTOR; 5-CONDUCTOR TERMINAL BLOCK; WITH LEVERS; MAX. CONTINUOUS SERVICE TEMPERATURE 85°C; CAGE CLAMP®CONNECTION

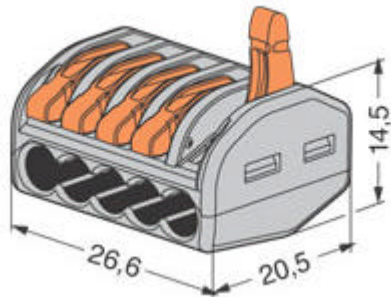

Packing unit 400 10\*40 pieces

Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2,5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Connection method	CAGE CLAMP®CONNECTION
Number of strands	5
Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	4 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Number of strands	5
Measured voltage EN	400 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	32 A
Measured voltage EN	600 V
Current intensity EN	20 A
Weight	7 g
Color	grey
Wiring type	Side-entry
No. of connection Points	5
No. of potentials	1
Height	14,5 mm
Height	0,571 in
Width	26,6 mm
Width	1,047 in
Depth	20,5 mm
Depth	0,807 in
Strip length from	9 mm
Strip length to	10 mm
Strip length	0,37 in