


---

Item no.: 2000-1203  
Product description: 2-CONDUCTOR THROUGH TERMINAL BLOCK SUITABLE FOR EX E APPLICATIONS

---

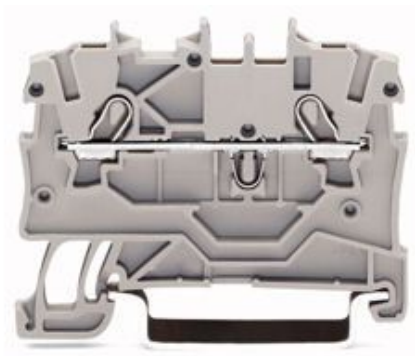

Produkt kann von Bild abweichen / product may differ

Packing unit 100 pieces

RoHS compliant

Cross section to [AWG]	16 AWG
Cross section to [AWG]	16 AWG
Cross section [AWG]	24 - 24 AWG
Width	0.138 in
Cross section [mm <sup>2</sup> ]	0.14 - 0.14 mm <sup>2</sup>
Strip length	0.39 in
Cross section to [mm <sup>2</sup> ]	1 mm <sup>2</sup>
Height	1.299 in
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Depth	1.909 in
Width	3.5 mm
Weight	3.62 g
Measured shock voltage	6 kV
Strip length from	9 mm
Strip length to	11 mm
Current intensity EN	13.5 A
Current intensity EN	18 A
Height	33 mm
Depth	48.5 mm

Measured voltage EN	800 V
No. of potentials	1
No. of connection Points	2



Pollution degree	3
Connection method	CAGE CLAMP®S Connection
Wiring method	e+f
Connection method	CAGE CLAMP®S Connection
Color	red
Wiring type	Front-entry
Country of Origin	Deutschland
Mounting	TS 35

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected