


**Speaker cable
Datasheet**

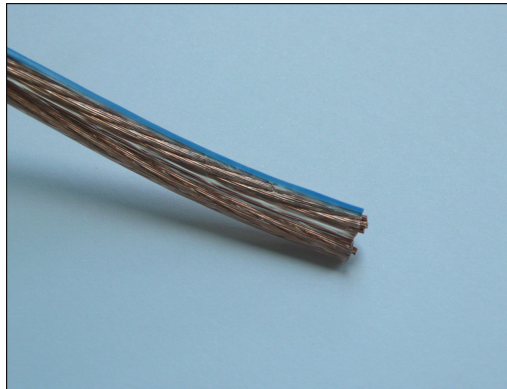

The Application:

Rated Voltage. 48V

splitable cable

Temperature range min. -20° C
Temperature range max. 70° C

Item No.	Speaker cable	Speaker cable	Speaker cable	Speaker cable
B/N	607714	607168	607012	607873
Jacker, outer dimension	PVC 2.4X5mm	PVC 3.2X6.4mm	PVC 3.5X7mm	PVC 4X8.3mm
Cross section area	2 x 0.75 sqmm	2 x 1.5 sqmm	2 x 2.5 sqmm	2 x 4.0 sqmm
strand per conductor	24 x 0.2 mm	48 x 0.2 mm	84 x 0.2 mm	355 x 0.12 mm
Conductor material	CCA	CCA	CCA	CCA
color	Transparent	Transparent	Transparent	Transparent
AWG	18AWG	16AWG	13AWG	11AWG
Packaging	30 meter spool	30 meter spool	20 meter spool	10 meter spool
Max current	6A	8A	16A	20A
Halogen free	NO	NO	NO	NO