MG1Txx-5,08

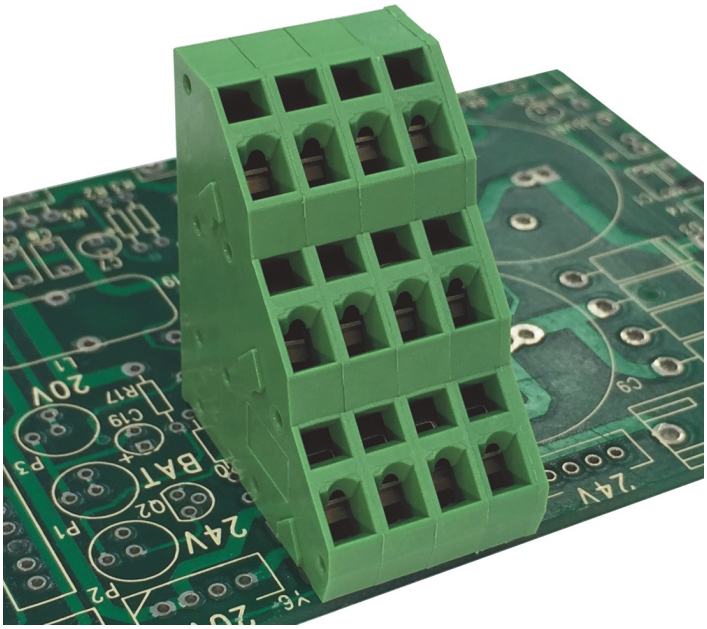

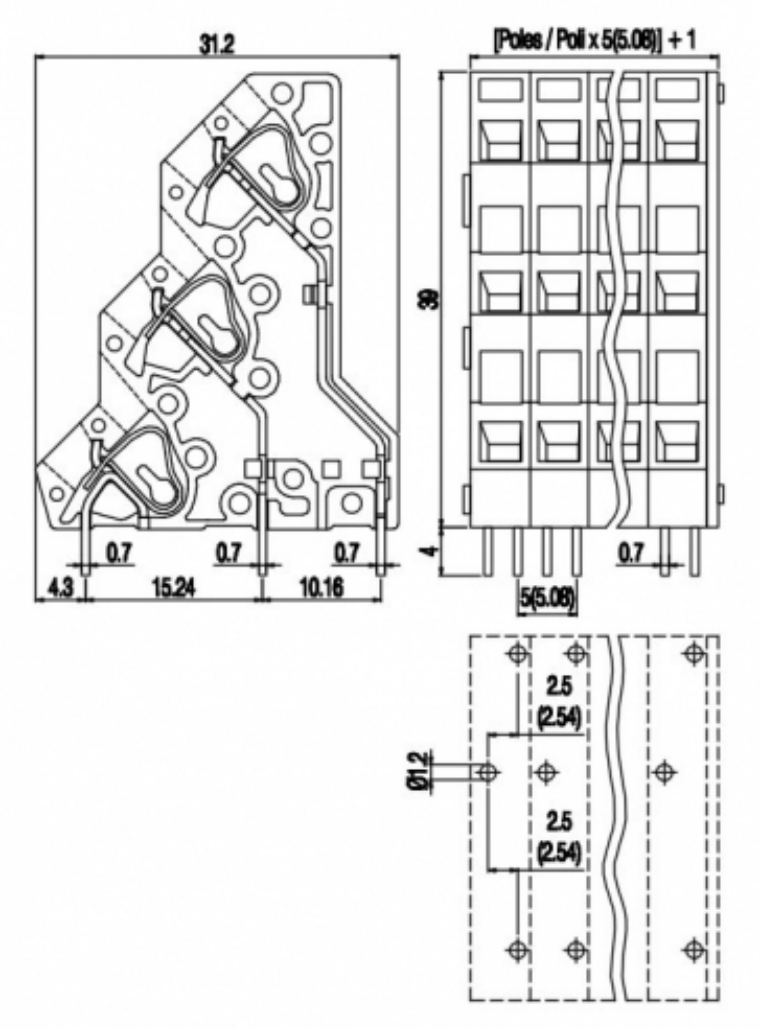

Screwless terminal block - 45° angled - 3 levels - Modular version - Pitch 5,08mm - 1 pole

GENERAL INFORMATION	
pitch:	5,08 mm
housing height:	39,00 mm
housing depth:	31.2 mm
dimensional class:	slow
wire section:	2.5 mm² / 14 AWG
clamp opening size:	
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +105°C

ELECTRICAL CHARACTERISTICS	
current:	24A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS	
spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA

-	-	UL 1059

Copyright ©2020 - euroclamp - http://www.euroclamp.it

current:	-	-	16A factory / 16A field
voltage:	-	-	300V
wire section:	-	-	12÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS

GN (STD)

other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG1T01-5,08	N/A	N/A	N/A
..	MG1T..-5,08	N/A	N/A	N/A