


Stiftleisten, Raster 2.54, Doppelreihig
Pin Header, Pitch 2.54, Double Row

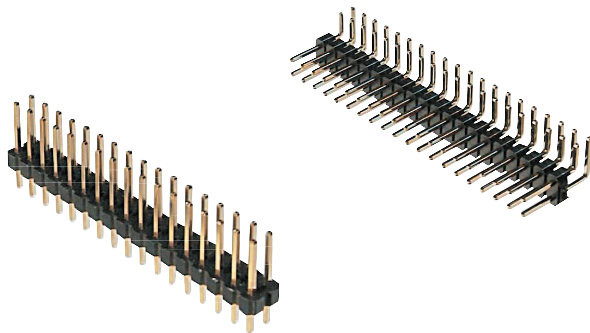

Isolierkörper
Polyester, UL94V-0

Insulator material
Polyester, UL94V-0

Nennstrom
3A

Current rating
3A

Kontakt material
Messing

Contact material
Brass

Insulationswiderstand
5000MΩ min.


Insulator resistance
5000MΩ min.

Durchschlagsspannung
500V AC


Dielectric withstanding
500V AC

Betriebstemperatur
-40°C bis +105°C


Operating temperature
-40°C to +105°C



Gerade Stifte / Straight pins



Gewinkelte Stifte / Angled pins

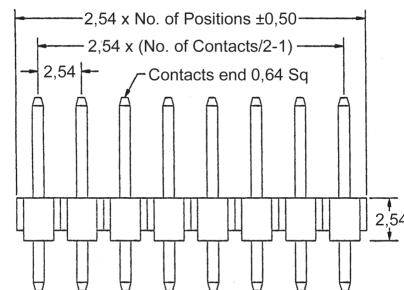

Bestellcode: **AWL254** **D** - **x** - **x** - **x** - **x**
 Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
 Please replace „x“ with appropriate option listed below

	1.	2.	3.	4.
1.	Ausführung G -gerade A -abgewinkelt		Version G -straight A -right angled	
2.	Oberfläche G -flash vergoldet * Z -verzinkt S -selektiv		Contact plating G -flash gold * Z -tinn S -selective	
3.	Polzahl 04 - 80		Number of contacts 04 - 80	
4.	Stiftlänge D -A=6mm, B=3mm* A -A=7mm, B=3mm (nur gerade)		Pin length D -A=6mm, B=3mm* A -A=7mm, B=3mm (only straight)	

* Standard

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper