

Quick Installation Guide

PICO-APL3-SEMI

This document will guide you through the basic installation process for your new PICO-APL3-SEMI.



PICO-APL3-SEMI



Item	Description	Remark/PN
1	PICO-APL3 board	MB
2	Top Chassis	M17APL3000
3	Bottom Chassis	M17SEMI000
4	Accessory kits	
	Power Button Cable x1	1709080102
	Screw.M3. Black x4pcs	S1D3004031
	Screw.M3 Nickel x4pcs	S1D5106010

Parts

1



2



3



4




Install Guide Steps

Step 1: On the top chassis, remove the three plastic coverings as shown.




Step 2: On the PICO-APL3 board, remove the nut and washer from the power input port.

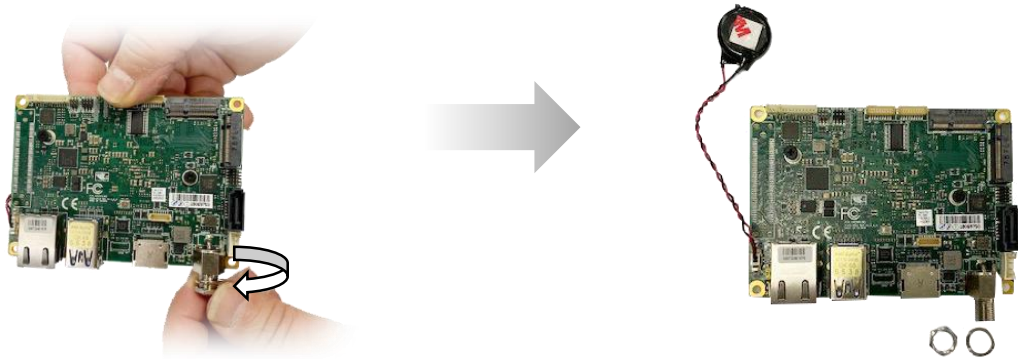


Step 3: Insert the PICO-APL3 board into the top chassis with the processor side toward the top chassis. DO NOT place the CMOS battery between the board and top chassis.




Step 4: Check that the I/O ports are properly aligned. Secure board with four nickel screws.

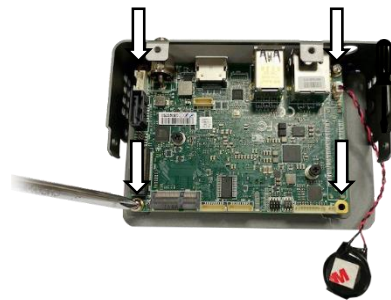


Step 5: Thread the power button cable through the hole for the power button. Plug the cable into the front panel header (CN53 in user manual). NOTE: The white dot indicates PIN 1 connector, make sure the connector is properly aligned. Next, gently push the power button in until it is secure (you will hear a 'snap'). Be careful not to tangle the power button cable with the CMOS battery cable.

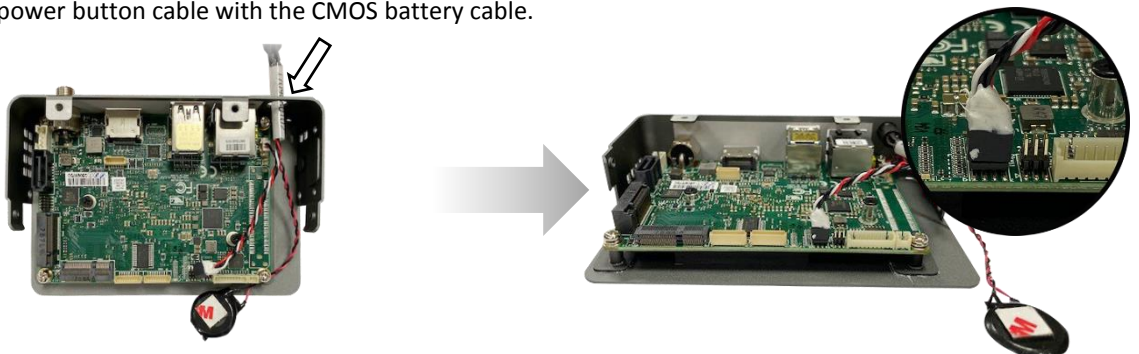

Step 6: Peel the backing off of the tape on the CMOS battery. Gently press the battery onto the PICO-APL3 board to secure it.

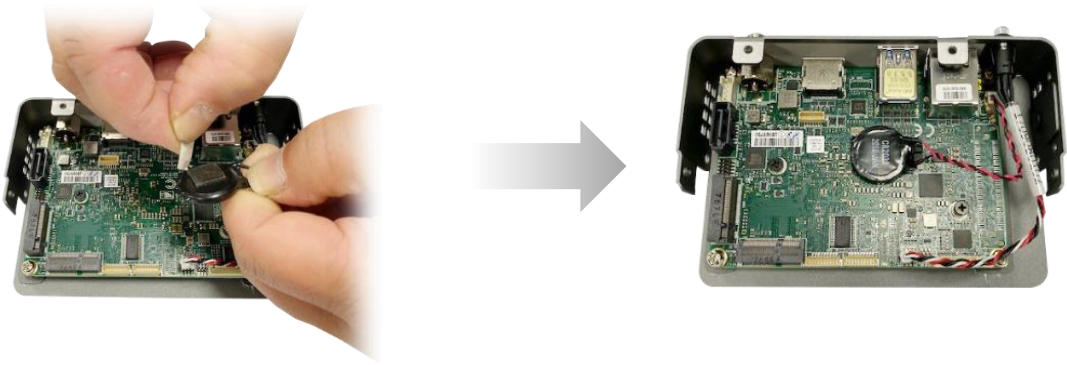

Step 7: Attach the bottom chassis by first lining up the right side, then swivel the chassis into place. NOTE: the bottom chassis does not slide directly on, it must swivel into place as shown in the figure.

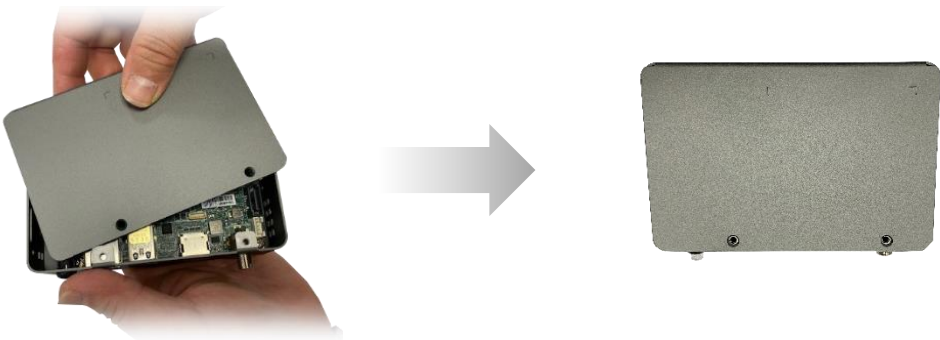

Step 8: Ensure the bottom chassis is properly lined up and attached. Use black screws to secure, two screws on the bottom and one screw on the left and right sides of the chassis.



Step 9: Replace the washer and nut for the power input port.

