


SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)


Nominal Capacity(At 2 mA/20°C/68°F/2.0V Cut-Off)	2.4 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 2mA/20°C/68°F)	3.6 V
Maximum Continuous Current	100 mA
Maximum Pulse Current Capability	200 mA
Rated 1 Sec. Pulse Capability(To 3V)	40 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	17.6 g(0.62 oz)
Anode Surface Area	14 cm ²
Volume	8.0 cm ³
Diameter(Max)	14.5 mm
Height(Max)	50.5 mm

Dimensions in mm

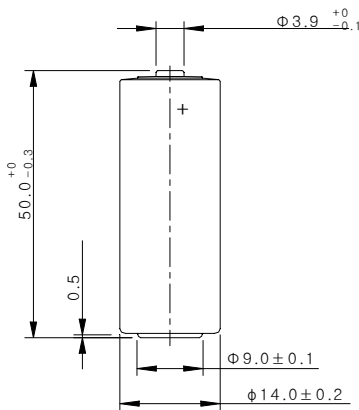


WARNING
Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water


DISCHARGE CHARACTERISTICS AT +20°C

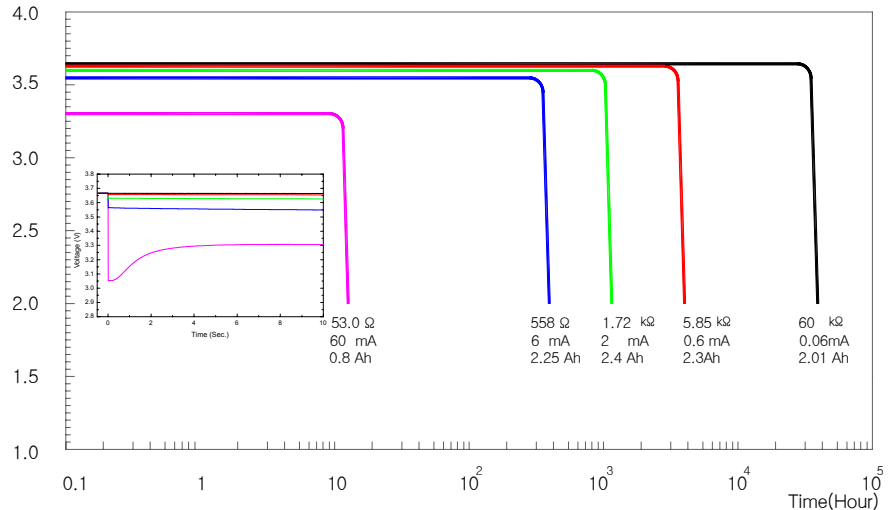


CAPACITY vs. CURRENT

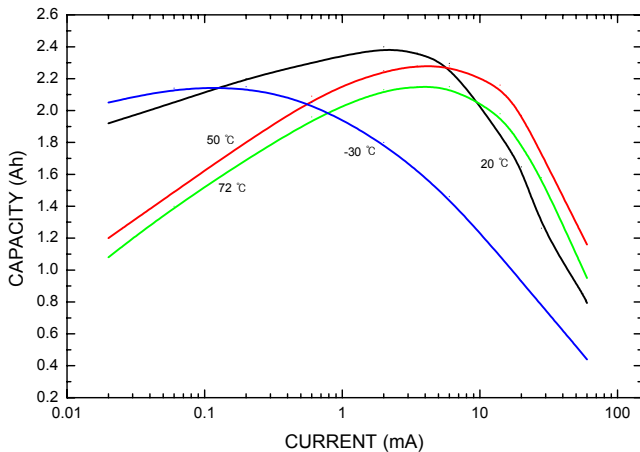


TEMPERATURE vs. OPERATING VOLTAGE

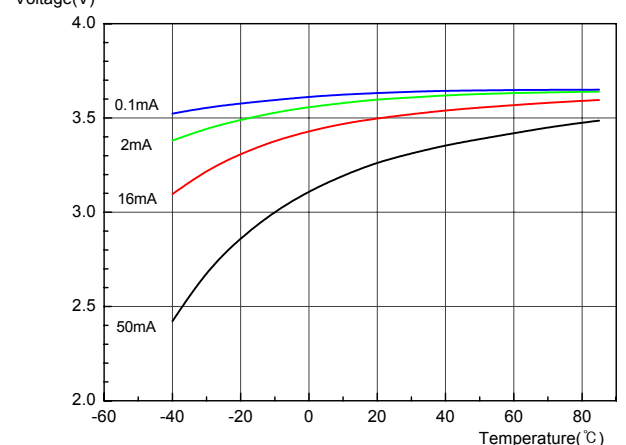


1. STD Terminal

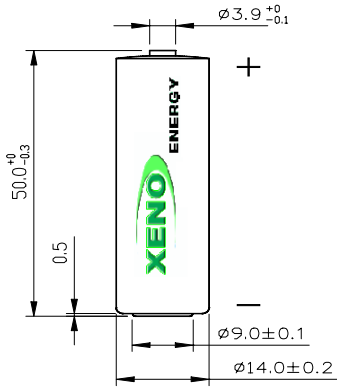


2. Connector




3. AX Terminal

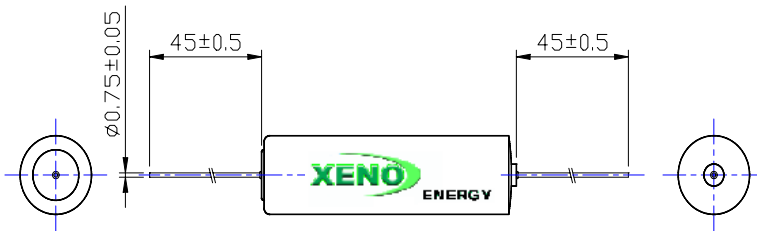


4. T1 Terminal

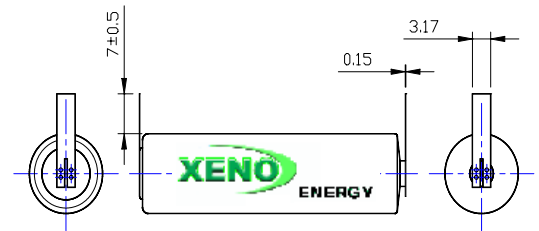


5. T2 Terminal

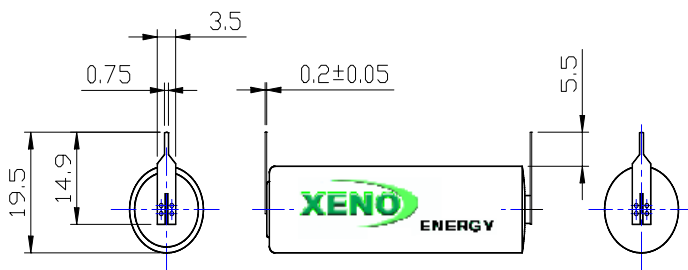

6. T3 Terminal

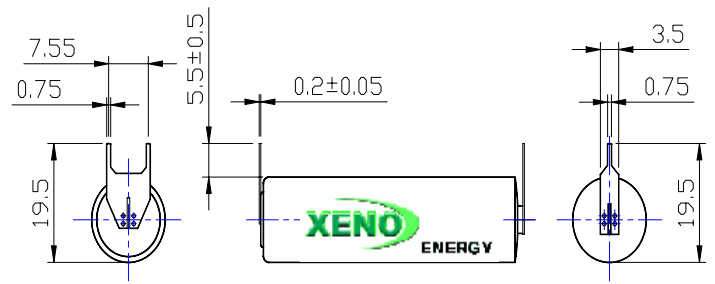

7. T3 EU Terminal

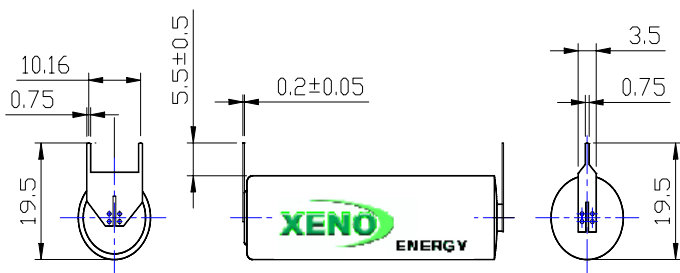

8. T3 EU/R Terminal

