



BLM31 Series (3216 Size)

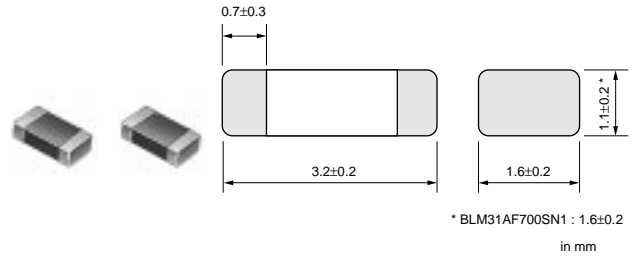


Part Number	Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	DC Resistance (max.) (ohm)	Operating Temperature Range (°C)
BLM31AF700SN1	70 ±25%	200	0.15	-55 to 125
BLM31AJ260SN1	26 ±25%	500	0.05	-55 to 125
BLM31AJ601SN1	600 ±25%	200	0.90	-55 to 125
BLM31BE601FN1	600 ±25%	300	0.35	-55 to 125
BLM31PG330SN1	33 (Typ.)	6000	0.01	-55 to 125
BLM31PG500SN1	50 (Typ.)	3000	0.025	-55 to 125
BLM31PG121SN1	120 (Typ.)	3000	0.025	-55 to 125
BLM31PG391SN1	390 (Typ.)	2000	0.05	-55 to 125
BLM31PG601SN1	600 (Typ.)	1500	0.09	-55 to 125

BLM31P series require derating above 85 °C ambient. Please contact us for details.



■ Equivalent Circuit

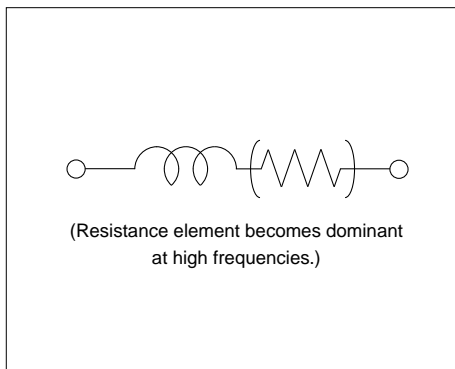

■ Impedance-Frequency (Typical)

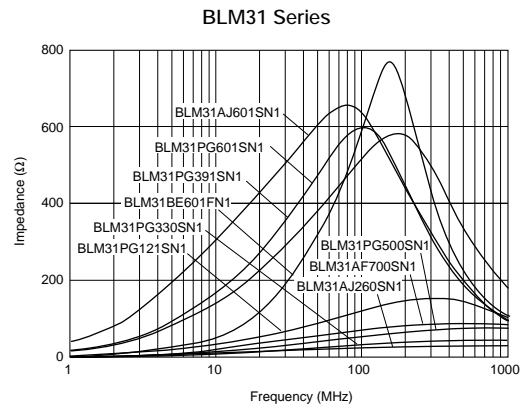

■ Impedance-Frequency Characteristics

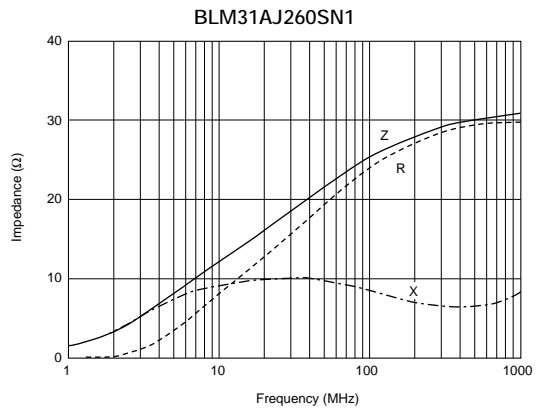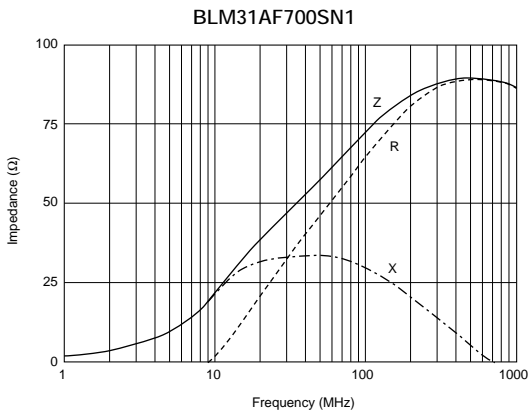

Continued on the following page.

Continued from the preceding page.

Impedance-Frequency Characteristics

1

