
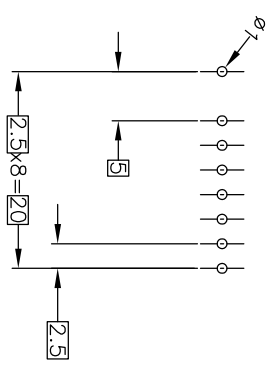
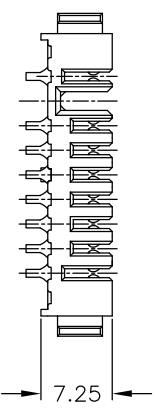
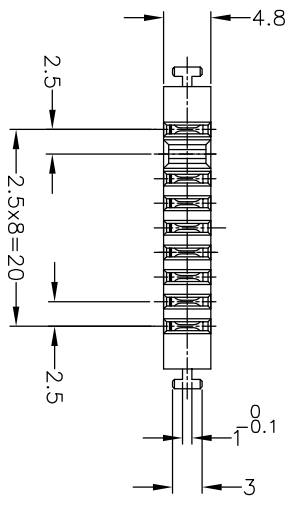


THIS DRAWING IS UNPUBLISHED.
 COPYRIGHT 2002 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.
 RELEASED FOR PUBLICATION 2002.


LOC DIST
 ES 00

REV	DATE	BY	APP'D
1	100CT07	L.L.S.Y	

1717478-1: AS SHOWN

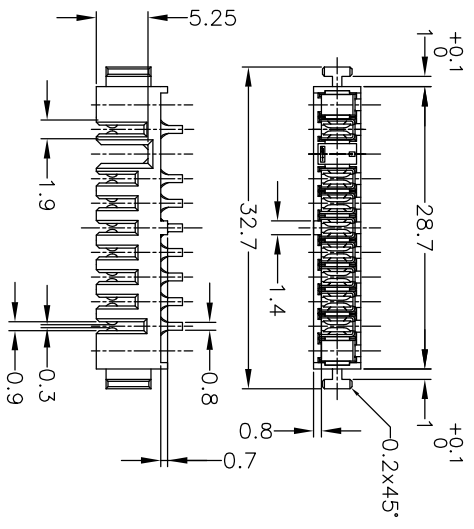

基板取付参考寸法
 REFERENCE P.C. BOARD LAYOUT
 P.C. BOARD THK 0.8~1.2
 (VIEW FROM CONNECTOR MOUNTING SIDE)



- △ 材料
 - ・ハウジング: 熱可塑性樹脂、UL94V-0、黒
 - ・コンタクト: 銅合金
 - ・仕上げ
 - ・コンタクト: ニッケル下地めっき
 - ・接触部: 金めっき
 - ・半田付け部: 銀めっき
- △ MATERIAL
 - ・ HOUSING: THERMOPLASTIC RESIN, UL94V-0, BLACK
 - ・ CONTACT: COPPER ALLOY
 - △ FINISH
 - ・ CONTACT: NI ALL OVER UNDER PL.
 - ・ GOLD PL. AT CONTACT AREA
 - ・ TIN PL. AT LEAD AREA

WIRE RANGE	INSULATION DIA
2.0 MAX.	1171478-2
1.5 MAX.	1717478-1
DIM.A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG	290CT03
CHK	T. KATANO
AP'D	T. KIMURA
PRODUCT SPEC	300CT03
PRODUCT SPEC	K. ILEGAMI
APPLICATION SPEC	取付適用規格
WEIGHT	

WIRE RANGE
 適合電線径面積

INSULATION DIA
 絶縁外径

TYCO ELECTRONICS
 Tyco Electronics Corporation
 Shanghai, P. R. China. 200233

NAME
 名称
 2.5mm PITCH BATTERY CONNECTOR
 RECEPTACLE ASSEMBLY 8POS.

SIZE
 寸法
 A3 00779

SCALE
 尺数
 2:1

SHEET
 1 of 1

REV
 B

DIMENSIONS: 単位: 単位 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 公差
0 PLG	± 0.3
1 PLG	± 0.3
2 PLG	± 0.3
3 PLG	± 0.3
4 PLG	± 0.3
ANGLES	± 5°

MATERIAL
 材料

FINISH
 仕上