


USB A + B, Konfektions-Version

USB A + B, Assembly-Type

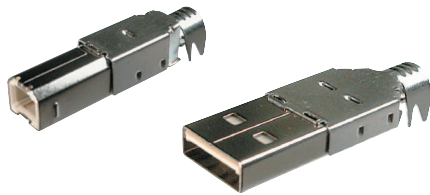

Isolierkörper

PBT, Glasfaserverstärkt, UL94V-0

Kontakte

Messing

Nennspannung

30V AC

Nennstrom

1A

Isolationswiderstand

1000MΩ min.

Kontaktwiderstand

30mΩ max.

Durchschlagspannung

750V AC

Betriebstemperatur

-55°C bis +105°C

Insulator

PBT, Glass fiber reinforced, UL94V-0

Contacts

Brass

Voltage rating

30V AC

Current rating

1A

Insulation resistance

1000MΩ min.

Contact resistance











30mΩ max.

Withstanding voltage

750V AC

Operating temperature

-55°C to +105°C



Bestellcode : **A - USBP - x - N**
 Ordercode :

Bitte „x“ durch die unten geeignete Optionen ersetzen
 Please replace „x“ with appropriate options listed below

1.

Ausführung

- A - Bauform A
- B - Bauform B

Version

- A - Type A
- B - Type B

Hauben für USB-Konfektions-Version

Hoods for USB-Assembly-Type



Farbe

Transparent

Material

ABS

Colour

Transparent

Material

ABS

Bestellcode : **A - USBPA - HOOD - N**
 Ordercode :

A - USBPB - HOOD - N

Type A

Type B

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powerscords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper