
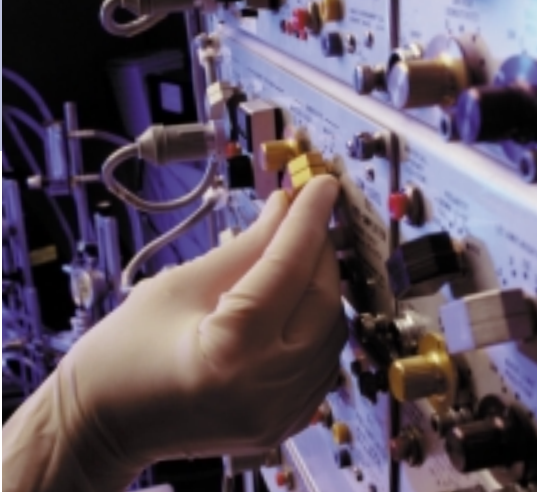


















# Plugs

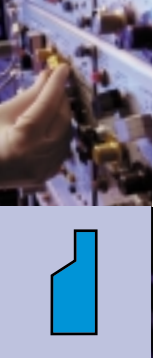

## Product description

Plugs and connectors permit users to assemble their own measuring and testing leads. A variety of contact-making and connecting systems offer the ideal solution for every application. Safety plugs with screw connectors comply with IEC 1010 and can be used for voltages up to 1000 V. Connectors permit the assembly of extensions and connecting leads. All the products are simply plugged, screwed or soldered

together without the need for specialised tools.

*System Article type	Technical Data	Order no. Colour	*System Article type	Technical Data	Order no. Colour
 <p>LAS S WS</p>	 <p>20 A screw connection up to 1.5 mm<sup>2</sup></p>	<p>934 099-100 ●</p> <p>934 099-101 ●</p> <p>934 099-102 ●</p> <p>934 099-103 ●</p> <p>934 099-104 ●</p>	 <p>LAS N WS</p>	 <p>20 A screw connection up to 1.5 mm<sup>2</sup></p>	<p>934 100-100 ●</p> <p>934 100-101 ●</p> <p>934 100-102 ●</p> <p>934 100-103 ●</p> <p>934 100-104 ●</p>
 <p>SLS 2000 SH</p>	 <p>25 A screw connection up to 2.5 mm<sup>2</sup></p>	<p>972 320-100 ●</p> <p>972 320-101 ●</p>	 <p>LAS 30</p>	 <p>20 A solder contact up to 1.5 mm<sup>2</sup></p>	<p>972 518-100 ●</p> <p>972 518-101 ●</p>
 <p>LAS S G</p>	 <p>20 A screw connection max. 1.5 mm<sup>2</sup></p>	<p>934 097-100 ●</p> <p>934 097-101 ●</p> <p>934 097-102 ●</p> <p>934 097-103 ●</p> <p>934 097-104 ●</p>	 <p>BUELA 20 K</p>	 <p>16 A screw connection max. 1.5 mm<sup>2</sup></p>	<p>930 726-100 ●</p> <p>930 726-101 ●</p> <p>930 726-102 ●</p> <p>930 726-103 ●</p> <p>930 726-104 ●</p>
 <p>LAS S W</p>	 <p>20 A screw connection up to 1.5 mm<sup>2</sup></p>	<p>934 098-100 ●</p> <p>934 098-101 ●</p> <p>934 098-102 ●</p> <p>934 098-103 ●</p> <p>934 098-104 ●</p>	 <p>BUELA 30 K</p>	 <p>30 A solder contact max. 2.5 mm<sup>2</sup></p>	<p>930 727-100 ●</p> <p>930 727-101 ●</p> <p>930 727-102 ●</p> <p>930 727-103 ●</p> <p>930 727-104 ●</p>

\* System: (64) = 0.64 mm system / (2) = 2 mm system / (4) = 4 mm system / (●) = 4 mm safety system / (↔) = 4 mm sliding sleeve system