


### IC-Fassungen, Low cost-Version, Raster 2.54mm IC-sockets, low cost version, pitch 2.54mm



#### Isolierkörper

Polyester, glasfaserverstärkt,  
UL 94V-0

#### Kontakte

Phosphorbronze, verzinnt

#### Betriebstemperatur

-55°C bis + 105°C

#### Strombelastbarkeit

1A

#### Durchschlagspannung

1000V AC (1min)

#### Insulator

Polyester, glass reinforced  
UL 94V-0

#### Contacts

Phosphor bronze, tin plated

#### Operating temperature

-55°C to +105°C



#### Current rating

1A

#### Withstanding voltage

1000V AC (1min)

No. of Contacts	Qty per Tube	Dimensions		
		A	B	C
06	80	7.62	10.0	7.62
08	60	10.06	9.96	7.62
14	34	17.68	9.96	7.62
16	30	20.22	9.96	7.62
18	26	22.76	9.96	7.62
20	24	22.86	9.96	7.62
22	21	27.80	9.96	7.62
22*	21	27.70	12.62	10.16
24	20	30.38	17.68	15.24
24**	20	30.38	17.68	7.62
28	17	35.46	17.68	15.24
28**	17	35.46	17.68	7.62
32	15	40.50	17.68	15.24
40	12	50.70	17.68	15.24

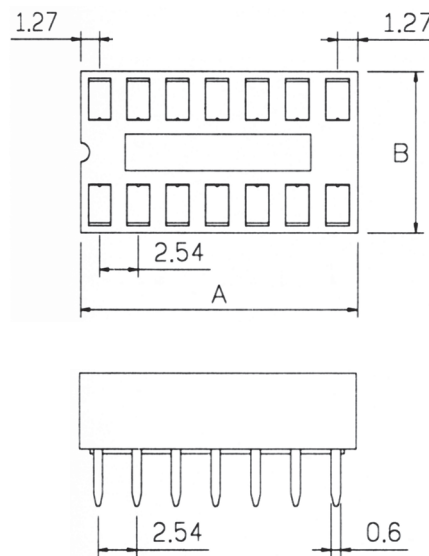

Bestellcode: **A** - **x** - **LC** - **x**  
Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen  
Please replace „x“ with appropriate option listed below

1.                      2.

1.

#### Polzahl

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

#### No. of contacts

06, 08, 14, 16, 18, 20, 22, 24, 28, 32, 40

2.

#### Ausführung

TT -Standard  
T2\* -Gesamtbreite(B) des Isolierkörpers 12.62mm  
(nur 22-polig verfügbar)  
7-T\*\* -Raster 7.62mm (nur 24 und 28 polig)  
TR -gesickt

#### Version

TT -Standard  
T2\* -width(B) of the Isobody 12.62mm  
(only 22-poles available)  
7-T\*\* -pitch 7.62mm (only 24 and 28 poles)  
TR -retentive legs