


Item no.: 235-409/331-000  
 Product description: 1-CONDUCTOR PCB TERMINAL STRIP 2 SOLDER PINS /  
 POLE 9 POLE PIN SPACING 5/5.08 MM / 0.2 IN WITH PUSH  
 BOTTOMS

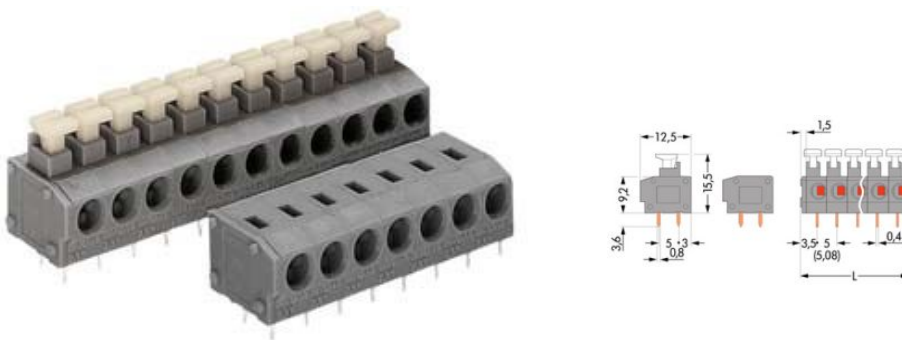

Produkt kann von Bild abweichen / product may differ

Packing unit 100 4\*25 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	6.941 g
Color	gray
No. of connection Points	9
No. of potentials	9
pole count	9
Height	15.5 mm
Height	0.61 in
Width	46.5 mm
Width	1.831 in
Depth	12.5 mm
Depth	0.492 in
Pin spacing from	5 mm
Pin spacing up to	5.08 mm
Pin spacing from	0.2 in
Pin spacing up to	0.2 in
Pollution degree	2
Measured voltage EN	320 V

Measured shock voltage	4 kV
Current intensity EN	17.5 A
Pollution degree	2
Measured voltage EN	630 V



Measured shock voltage	4 kV
Current intensity EN	17.5 A
Cross section [mm <sup>2</sup> ]	0.2 - 1.5 mm <sup>2</sup>
Wiring method	solid
Cross section [mm <sup>2</sup> ]	0.25 - 0.75 mm <sup>2</sup>
Wiring method	fine-stranded (with ferrule and plastic collar)
Cross section [mm <sup>2</sup> ]	0.25 - 0.75 mm <sup>2</sup>
Wiring method	fine-stranded (with ferrule, without plastic collar)
Cross section [AWG]	20 - 14 AWG
Strip length from	9 mm
Strip length to	10 mm
Material group	I
Contact material	Electrolytic copper (Ecu)
Contact surface	tin-plated



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
235-409/331-000	CSA	154112-1673956	300	15	20-14
235-409/331-000	UR	E45172	300	10	20-14

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected