


Leiterplatten-Verbinder, 2-reihig, Raster: 2.54 mm PCB Transition connectors, 2 rows, pitch: 2.54 mm



Isolierkörper
Glasfaserverstärktes
Thermoplastic, UL94V-0
Farbe
Grau
Kontaktvergoldung
Zinn über Nickel
Kontakt
Messing
Kontaktwiderstand
30mΩ max / 1A DC
Insulationswiderstand
1000MΩ / 500V DC
Durchschlagsspannung
500V AC/eff, 60Hz
Nennstrom
1A
Betriebsspannung
250V AC/eff, 60Hz

Insulator
Glass-filled
thermoplastic, UL94V-0
Colour
grey
Contact plating
tin over nickel
Contact
Brass
Contact resistance
30mΩ max / 1A DC
Insulation resistance
1000MΩ / 500V DC
Dielectric voltage
500V AC/rms, 60Hz
Current rating
1A
Voltage rating
250V AC/rms, 60Hz

No. of Contacts	Dimension (mm)	
	A	B
10	18.15	10.16
14	23.23	15.24
16	25.77	17.78
26	38.47	30.48
34	48.63	40.64
40	56.25	48.26
50	68.95	60.96
60	81.65	73.66
64	86.73	78.74

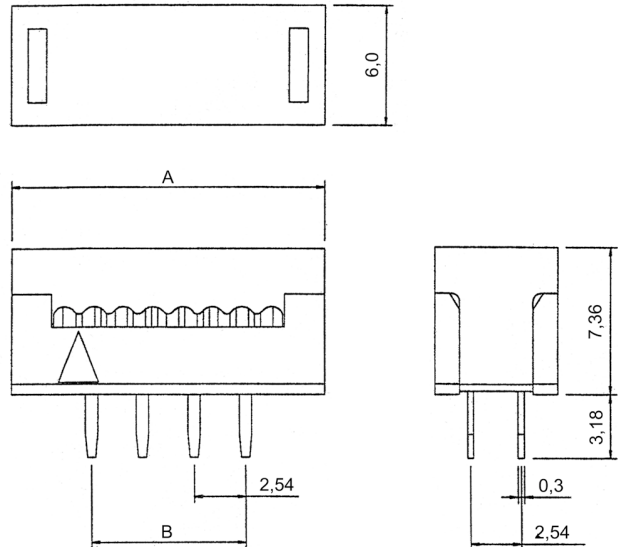

Bestellcode: **AWLP - x / 3.2-T**
Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. Polzahl
10* / 14* / 16* / 20* / 26* / 34* / 40* / 50* / 60* / 64*

No. of contacts
10* / 14* / 16* / 20* / 26* / 34* / 40* / 50* / 60* / 64*

*Standard

D-Sub / Hoods
Centronics
Multiflex
Modular
USB
Switches
Powercords
Powersockets
MiniDIN
DIN4161x
Hardmetric
Sockets + Strips
Jumper