

Data sheet

257-856

MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY



Technical data

Package size 400 4*100 pieces.

Pin spacing from	7.5 mm
Pin spacing up to	7.62 mm
Pin spacing from	0.295 in
Pin spacing up to	0.3 in
pole count	1
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Current UL	15 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	800 V
Measured shock voltage	6 kV
Pollution degree	2
Current intensity EN	16 A
Weight	1.373 g
Color	orange
Wiring type	Front-/Side-entry
No. of connection Points	1

Data sheet**257-856****MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY**

No. of potentials	1
Height	20.2 mm
Height	0.795 in
Width	7.5 mm
Width	0.295 in
Depth	14.2 mm
Depth	0.559 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

Data sheet

257-856

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY**

Approval	Voltage	Current	Approval number	Notes
BBJ	400	16	B/12/697/03	
BV	800/400	16	11915/A0	
CCA	400	16	DK2082	
CSM	400/800	16	017956	
DEMKO	500	16	98-04355	
DNV	800/400	16	E6998	
GL	800/400	16	17296-00HH	
RMR	400	16	99.00007.250	
RosTesT	400/800	16	B09523	
UL	300	15	E45172	

Data sheet

257-856

MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY


Accessories

	Item number
END PLATE SNAP FIT TYPE	257-600
Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
Profile PCB 236, 255, 256	Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.5MM	249-171
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.5MM	249-170/236-704
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.62 MM	249-173
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 7.62 MM	249-172/236-708
SPACER FOR DOUBLING THE PIN SPACING	257-811
TEST PLUG SUITABLE FOR PCB TERMINAL BLOCKS, SERIES 255, 256, 257	249-112
TEST PLUG SUITABLE FOR PCB TERMINAL BLOCKS, SERIES 255, 256, 257	249-113

Data sheet

257-856

MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY

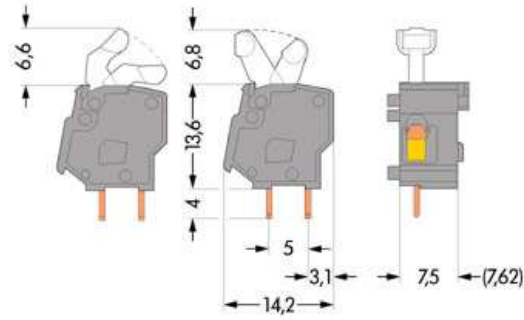

Data sheet

257-856

**MODULAR PCB TERMINAL BLOCK 2 SOLDER PINS / POLE
PIN SPACING 7.5/7.62 MM / 0.3 IN ANGLED LEVER FRONT-/SIDE-ENTRY**

Diameter of drilled hole: 1,1^{+0,1} mm