


Circuit diagram

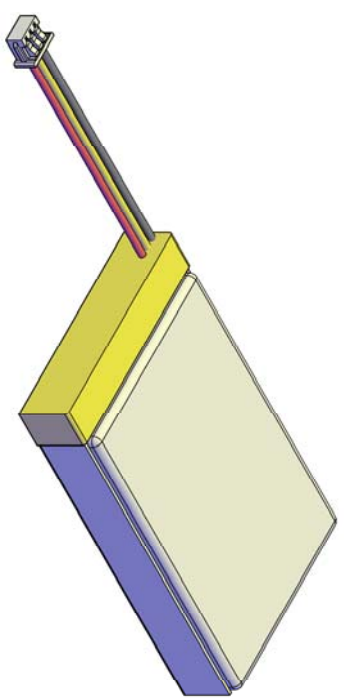

Model: LP103454		Overcharge Detection Voltage(V)	4.28±0.05
Min.Capacity 最低容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)		Overdischarge Detection Voltage(V)	2.3±0.1
Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)		过放保护电压 (V)	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 2 (A)
Nominal Voltage 标称电压 (V)		客户要求的最大负载电流 Customer required Max loading current peak value (A) 峰值 2 (A)	constant (A) 持续 1 (A)
Internal impedance 内阻 (≅) (mΩ,AC 1KHz)		Battery protection Related Value: (相关的电池保护值)	
Charge Temp. 充电温度 (°C)		Ambient Conditions (环境温度)	
Discharge Temp. 放电温度 (°C)		Humidity(湿度)	
0~45		65±20%	

		Drawn: Moyongdi		Revise No.: E4-2009	
		Checked 1: Helen		Projection:	
Title: LP103454-PCM-NTC-LD/		Checked 2: Keyan		Page: 1/1	
File NO. A04049		Approved:		Scale: 1:1	
		Draw Date: 2010/12/03		Unit: mm	

Remark(备注):
 1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
 2. Rohs compliant(严格按照ROHS要求生产).