


SAFETY ISOLATING TRANSFORMER

POWER : 2.1VA
 INPUT VOLTAGE : 117V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 7.5V-2VA + 14V-20mA


INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER

IP00
 UL94V0
 OPERATING TEMPERATURE : -25°C to 70°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 INHERENT PROTECTION

MEET STANDARDS :
 UL506
 CSA 22-2
 EN61558-1
 EN61558-2-6
 CE



N°21

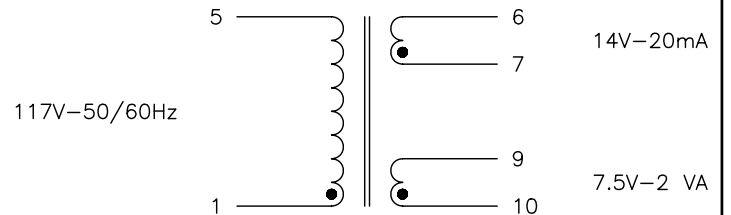

D					
C					
B					
A					
Rev	Date	Modification	Dessiné	Visa	

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par: JPM	Date: 21/10/2011	Visa:	J.P.M.
DATA SHEET 26922			
EI 30x18			
		22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77030 COLLEIGNY Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	
			DS26922