

SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC






PRODUCT FEATURES

- ◆ Million times proven, double lifting contact system
- ◆ High electrical rating up to 16 A
- ◆ High rating with 100 000 mechanical switching cycles
- ◆ Illuminated and non-illuminated variants
- ◆ Variant with dust and water protection IP 65/IP 67

ON REQUEST



































- ◆ Other colors
- ◆ Printing
- ◆ Other lamp variants
- ◆ Snap-on customized actuators
- ◆ Other terminal variants (e.g. 6.3 x 0.8 mm)
- ◆ Cable assembly

Mechanical life endurance	10E4
Operating force	ca. 12 N ca. 8 N (basic type 1683)
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Protection type	IP 40 (IP 65/IP 67 product-dependent on request)
Ambient temperature	terminal side -20 °C ... +100 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 (actuator: V-0, socket: V-1, housing: V-2)
Glow wire test temperature	850 °C
Material	actuator: PC housing: PA / PA glasfaserverstärkt terminals: silver plated / copper bare (product-dependent)
Plug force of the terminals	≤ 80 N
Approval marks	 /  / 
Suitable for appliances of protection class II	

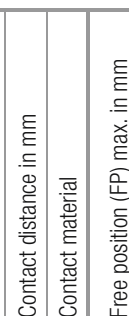

SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES

TO 16 A 250 V AC

 single-pole		Lighting voltage in V	Actuator color / printing	16 (4) A 250 V AC 1E4	12 (8) A 250 V AC 1E4	10 (8) A 250 V AC 5E4	12 A 125 - 250 V AC 1/2 HP	Terminal type	Terminal description	Contact distance in mm	Contact material	Free position (FP) max. in mm	Operating position (OP) in mm	Permissible total travel position (TP) in mm	Miscellaneous	Actuator description	Stock version
ON / OFF switch (SPST)																	
1686.1101	230		● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			
1686.8104	230		● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7	IP 65/IP 67		
1683.1101			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			
1683.3101			● ● ● ●						4.8 horizontal	≈ 3	Ag	23.5	20.45	19.3			
1683.8101			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7	IP 65/IP 67		
Normally open contact (SPNO)																	
1686.6155	24								4.8 / 2 x 2.8	≈ 3	Au	23.9	20.85	19.7	lamp terminal (2.8) external		
1683.1201			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			●
1683.1802			● ● ● ●						4.8	≈ 3	Ag	23.5	20.45	19.3			
1683.3601			● ● ● ●						4.8 horizontal	≈ 3	Ag	23.5	20.45	19.3	snap-on actuator		
 double-pole		Lighting voltage in V	Actuator color / printing	16 (4) A 250 V AC 1E4	12 (8) A 250 V AC 1E4	10 (8) A 250 V AC 5E4	12 A 125 - 250 V AC 1/2 HP	Terminal type	Terminal description	Contact distance in mm	Contact material	Free position (FP) max. in mm	Operating position (OP) in mm	Permissible total travel position (TP) in mm	Miscellaneous	Actuator description	Stock version
ON / OFF switch (DPST)																	
1687.1104	230		● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			●
1684.1101			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			
1684.1104			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			
1684.1701			● ● ● ●						4.8	≈ 3	Ag	23.5	20.45	19.3	snap-on actuator		
1684.1801			● ● ● ●						4.8	≈ 3	Ag	23.5	20.45	19.3			
1684.2701			● ● ● ●						4.8 vertical	≈ 3	Ag	23.5	20.45	19.3	snap-on actuator		
Normally open contact (DPNO)																	
1684.1201			● ● ● ●						4.8	≈ 3	Ag	23.9	20.85	19.7			


ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 FACT AND KEY SWITCHES
 SNAP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS

SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 A 250 V AC




Basic type 1683
single-pole
non-illuminated




X	Y	Z
0.75 ... 1.25	19.2 ^{-0.1}	12.9 ^{+0.1}
1.25 ... 2	19.4 ^{-0.1}	12.9 ^{+0.1}
2 ... 3	19.8 ^{-0.1}	12.9 ^{+0.1}

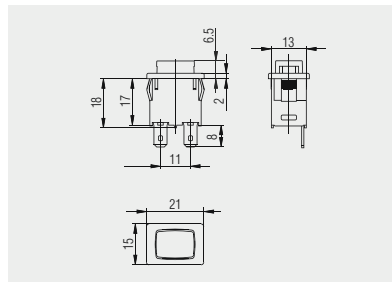

Quick-connect terminal 4.8 x 0.8

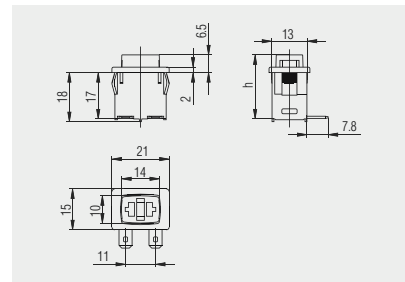


Quick-connect terminal 4.8 x 0.8
horizontal

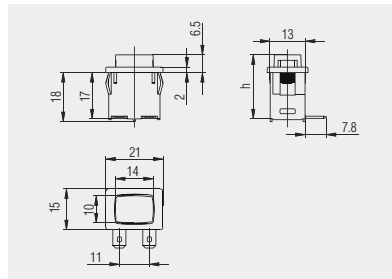


Quick-connect terminal 4.8 x 0.8
horizontal



Basic types 1683, 1684, 1686
and 1687
single and double-pole
illuminated / non-illuminated



X	Y	Z
0.75 ... 1.25	19.2 ^{-0.1}	12.9 ^{+0.1}
1.25 ... 2	19.4 ^{-0.1}	12.9 ^{+0.1}
2 ... 3	19.8 ^{-0.1}	12.9 ^{+0.1}

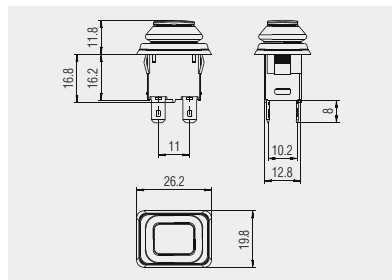

Quick-connect terminal 4.8 x 0.8
1686.8101 and 1683.8104
with bellows for IP 65/IP 67

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

FACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS

SERIES 1683 - SINGLE AND DOUBLE-POLE PUSHBUTTON SWITCHES


TO 16 A 250 V AC




Basic types 1684, 1686 and 1687
single and double-pole
illuminated / non-illuminated




X	Y	Z
0.75 ... 1.25	19.2 ^{-0.1}	12.9 ^{+0.1}
1.25 ... 2	19.4 ^{-0.1}	12.9 ^{+0.1}
2 ... 3	19.8 ^{-0.1}	12.9 ^{+0.1}

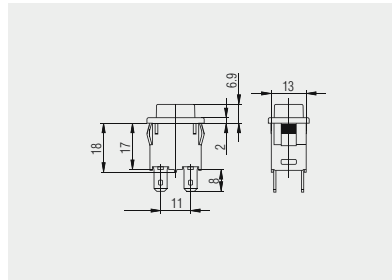


Quick-connect terminal 4.8 x 0.8
1684.1101, 1684.1104, 1684.1201,
basic types 1687 and 1686

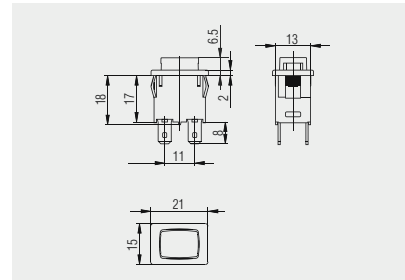


Quick-connect terminal 4.8 x 0.8
basic type 1684

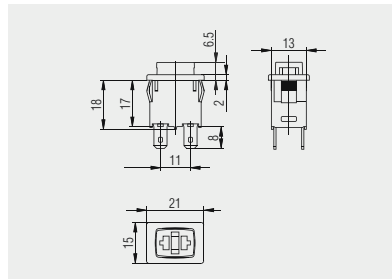

Quick-connect terminal 4.8 x 0.8
basic type 1684

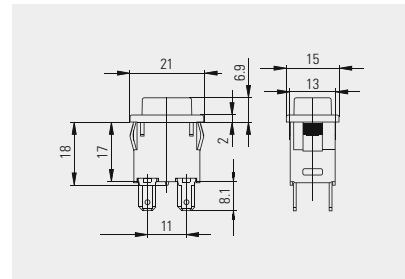


Quick-connect terminal 4.8 x 0.8 /
2 x 2.8 x 0.8 with external lamp
terminal
1686.6155

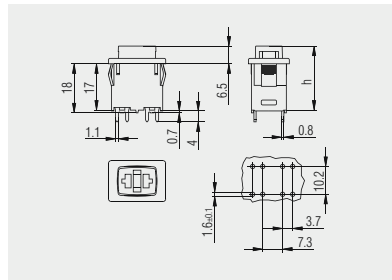

PCB terminal vertical
1684.2701



Protection cap
203.701.011

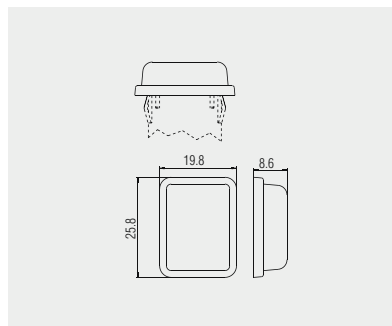

Transparent PVC - protection cap for
dust and water protection from the
actuation side

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

FACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS