



RECOMMENDED P.C.B LAYOUT  
TOLERANCES: ±0.05mm

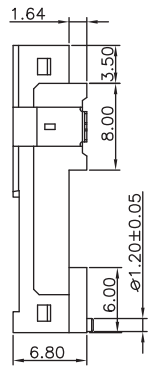

Pin type	Interface Dim. L	Pin No.
POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26

TECHNICAL CHARACTERISTICS


MATERIAL  
INSULATOR: LCP  
FLAMABILITY RATING: UL94-V0  
COLOR: WHITE  
CONTACT MATERIAL: COPPER ALLOY  
CONTACT TYPE: STAMPED  
CONTACT PLATING: SELECTIVE GOLD  
QUALITY CLASS: 10000 MATING CYCLES

ENVIRONMENTAL  
OPERATING TEMPERATURE: -25 UP TO 85°C  
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
CURRENT RATING: 0.5 A  
WORKING VOLTAGE: 100 VAC  
INSULATOR RESISTANCE: >1000 MΩ  
WITHSTANDING VOLTAGE: 500 VAC/MIN  
CONTACT RESISTANCE: 40 mΩ MAX

SOLDERING  
JEDEC LEAD FREE REFLOW SOLDERING PROCESS

PACKAGING  
TAPE & REEL



RoHS Compliant			
B	12-FEB-17	TKP	GG
A	11-AUG-31	PDF	GG
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL: RJ	

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15
UNIT: MM
SCALE:
SHEET: 1/2
DRAW:

DESCRIPTION: Compact Flash Card Connector - Header - Shrouded type 50 pins	
WERI PART NO: 693 120 035 011	

SIZE	D
A4	

1


2

3




4

5

Unreeling direction

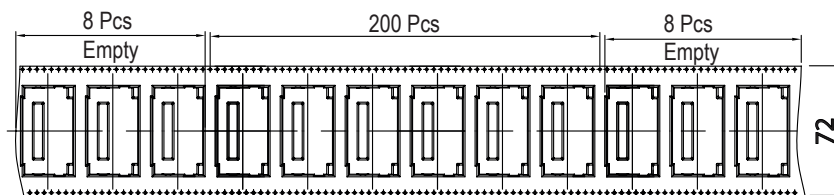


200 Pcs/Reel  
4 Reels/Carton  
800 Pcs/Carton

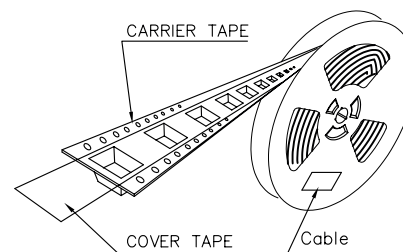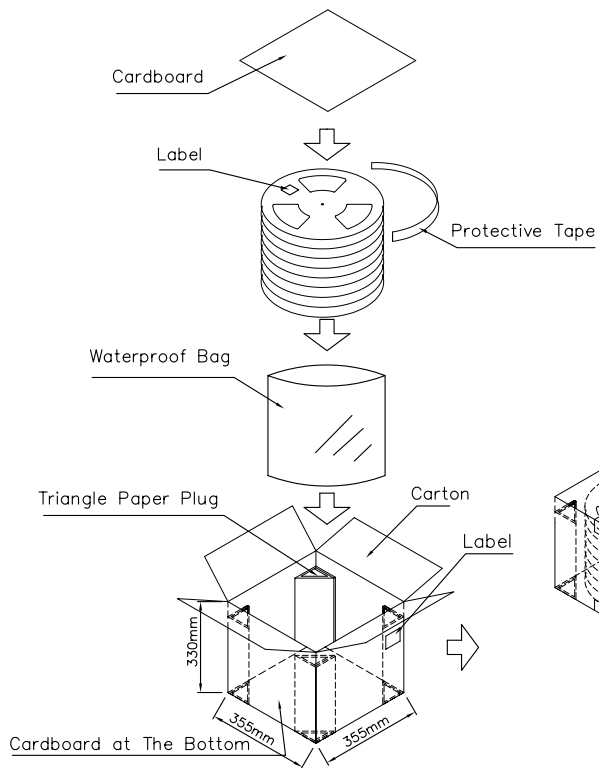

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X =  $\pm 0.2$ .XX =  $\pm 0.15$ 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 2/2

DRAW:

DESCRIPTION: Compact Flash Card Connector - Header - Shrouded type  
50 pins

WERI PART NO: 693 120 035 011

SIZE

**A4**

REV

DATE

FILE

BY