




**1 VA** • 230 V supply voltage by series/parallel connection


- Vacuum filling
- One compartment housing 1 VA
- Two compartments bobbins 0,8 VA
- Degree of protection IP 00
- 50 grams weight


- Resin UL 94 VO
- Design protection against short-circuits
- Insulation voltage 4 KV ( 6 KV MYRRA test)
- 100 % tested production

Conform to EN 61558 - UL 506.

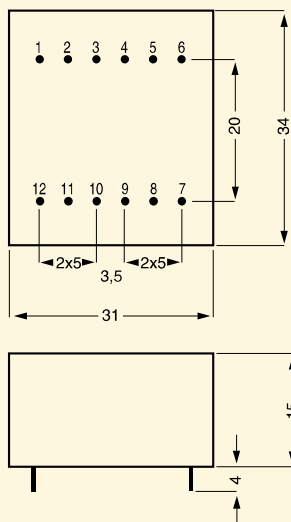

Type 1 VA

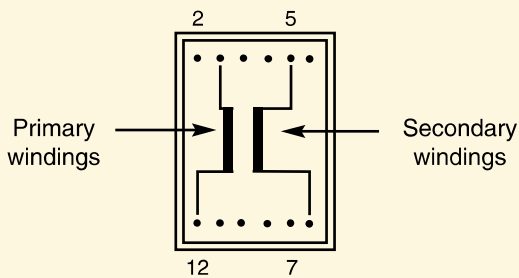

PRIMARY VOLTAGE 230 V					
Protection	Reference	Secondary voltage V	Secondary current mA	No-load voltage V	Ambient Temperature °C
UI 21		230 V		1 VA	
	45001	6	167	11,4	T 70 B
	45002	9	111	17	T 70 B
	45003	12	83	22,8	T 70 B
	45004	15	67	28,5	T 70 B
	45005	18	56	34,2	T 70 B
	45006	24	42	45,6	T 70 B