LTC Batteries

SL-2880 Size: D

› XOL – extended operating life

Performance Data
(Typical values for batteries stored at +25 °C for one year)

System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	19 Ah
Nominal current	4 mA
Max. continuous discharge current	100 mA
Pulse current capability	250 mA
Anode surface area	45 cm^2
Lithium content	5 g
Weight	93 g
Volume	51 cm^3
Temperature range	–55 °C ... +85 °C

Typical Discharge Curves at +25 °C

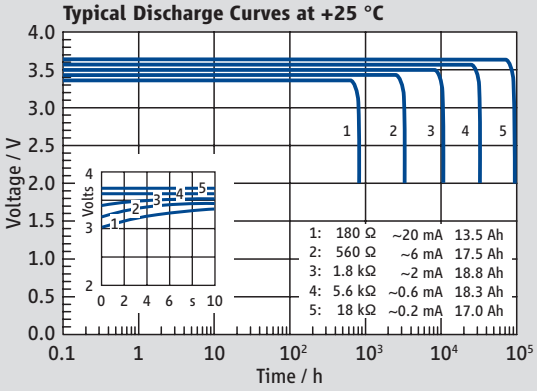

Available Capacity

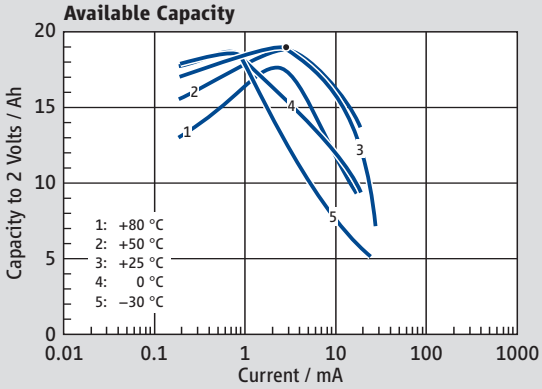

Operating Voltage

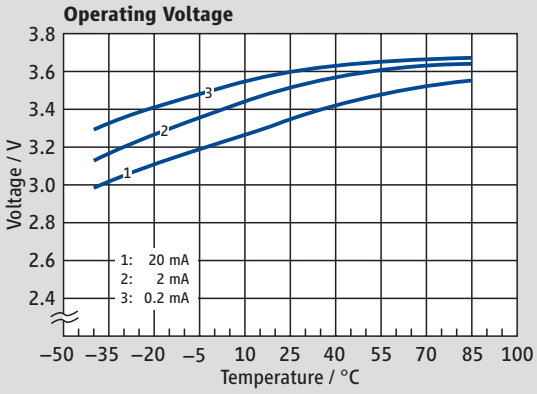

SL-2880/S

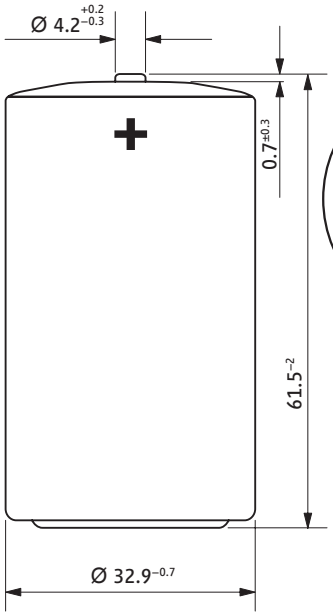

SL-2880/T

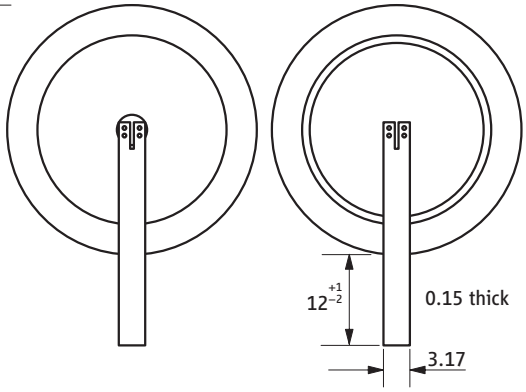

SL-2880/P

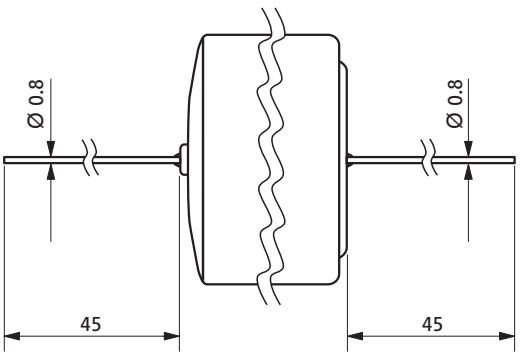

Available Terminations		Catalogue No.
SL-2880/S	Standard	11 2 18801 00
SL-2880/T	Tags	11 2 18802 00
SL-2880/P	Pins	11 2 18803 00

WARNING: Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

Tadiran Batteries GmbH • Industriestr. 22 • 63654 BÜDINGEN
GERMANY • Tel.: +49 (0)6042 954-0 • www.tadiranbatteries.de

PDC13Eng