


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2020/02/21

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

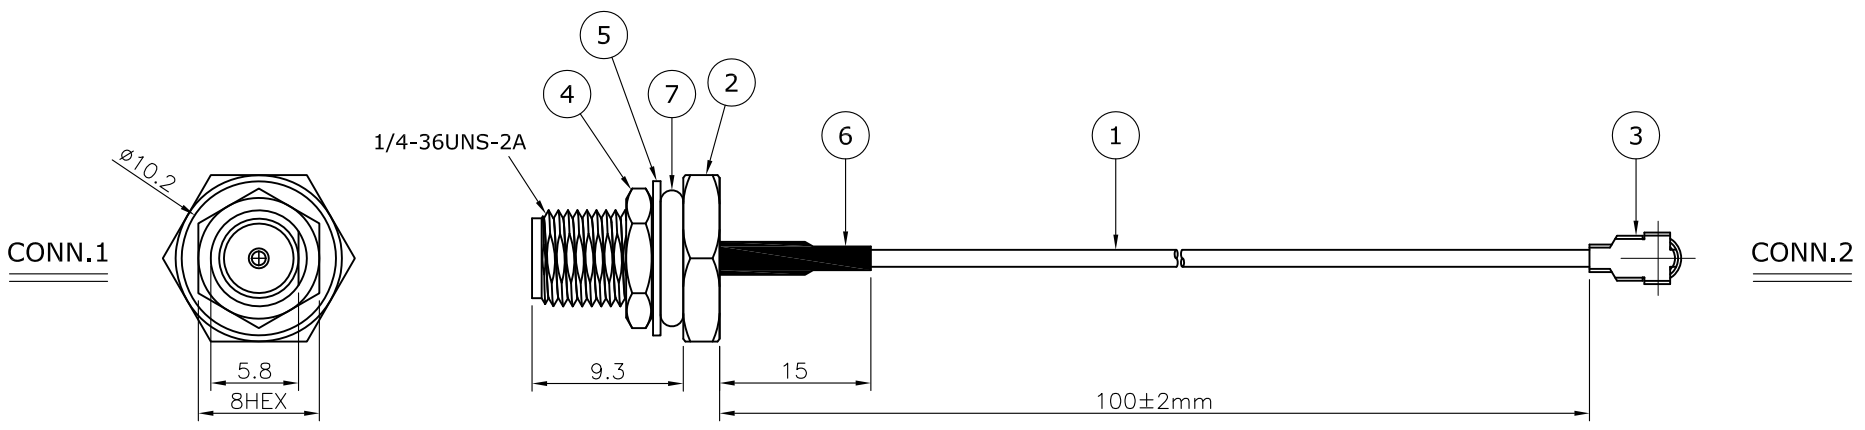

RECOMMENDED MOUNTING HOLE

7	1PC	O-ring, $\phi 6.35 \times 2.0 \times 10.35 \text{mm}$
6	1PC	Heat shrink tube, Black
5	1PC	Washer, Brsaa, Gold plating, T=0.5
4	1PC	NUT, Brsaa, Gold plating, T=1.6
3	1PC	IPEX-I, Gold plating
2	1PC	SMA (F) S/T Bulkhead Jack with O-Ring
1	1PC	Cable, $\phi 1.13 \text{mm}$, Gray

NO.	Q'ty	DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ± 1 11~30 ± 2 31~50 ± 3 51~200 ± 5	>401 ± 10 ANGLE $\pm 5^\circ$
mm		
		www.attend.com.tw
DRAWN	Fros	2020/02/20
CHECKED	Novia	2020/02/20
APPROVED	Jennifer	2020/02/20
		DRAWN NAME: RF Cable, L=100mm, IP67
		CUSTOMER NO.
		PRODUCT NO. SMA-1P1R-2003016

