

- Fully encapsulated low profile plastic casing in chassis mount version
- 2 x MOPP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- IT and industrial safety according to IEC/EN/UL 60950-1 and UL 508
- Ready to meet ErP directive <0.5 W no load power consumption
- -40°C start-up temperature
- Safety class II prepared
- Protection against over-temperature, overload and short circuit
- 3-year product warranty



The TMM 60C Series of fully encapsulated 60 Watt AC/DC power supply modules feature a reinforced/double I/O isolation system according to latest medical safety standards 60601-3 3rd edition for 2 x MOPP (Means Of Patient Protection).

The high efficiency and the use of highest grade components make the units suitable for an operating temperature range of -40°C to +60°C while it goes up to 75°C with 50% load derating. EMI/EMC characteristics and the safety approval package qualify these modules not only for medical devices but also for demanding applications in transportation systems and for equipment in industrial an commercial environment.

### Models

Order Code	Output Power max.	Output Voltage nom.	Output Current max.	Efficiency typ.
TMM 60105C	51 W	5.1 VDC	10'000 mA	84 %
TMM 60112C	60 W	12 VDC	5'000 mA	87 %
TMM 60115C		15 VDC	4'000 mA	87 %
TMM 60124C		24 VDC	2'500 mA	87 %
TMM 60148C		48 VDC	1'250 mA	88 %

### Options

TMP-MK2	- Optional DIN-Rail Mounting Kit: <a href="http://www.tracopower.com/products/tmp-mk2.pdf">www.tracopower.com/products/tmp-mk2.pdf</a>
---------	--

Input Specifications		
Input Voltage	- AC Range	85 - 264 VAC (Full Range)
	- DC Range	120 - 370 VDC (Designed for, no certification)
Input Frequency		47 - 63 Hz (designed to meet: 47 - 440 Hz)
Input Current	- Full Load & Vin = 230 VAC	5.1 VDC model: 530 mA max. 12 VDC model: 600 mA max. 15 VDC model: 600 mA max. 24 VDC model: 600 mA max. 48 VDC model: 600 mA max.
	- Full Load & Vin = 115 VAC	5.1 VDC model: 880 mA max. 12 VDC model: 1'000 mA max. 15 VDC model: 1'000 mA max. 24 VDC model: 1'000 mA max. 48 VDC model: 990 mA max.
Power Consumption	- At no load	500 mW max. (Ready to meet ErP directive)
Input Inrush Current	- At 230 VAC	60 A max.
	- At 115 VAC	30 A max.
Input Protection		T 2 A / 250 VAC (Internal Fuse in L & N)
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)

Output Specifications		
Voltage Set Accuracy		±2% max.
Regulation	- Input Variation (Vmin - Vmax)	1% max.
	- Load Variation (0 - 100%)	1% max.
	dual output models:	1% max. (Output 1) 1% max. (Output 2)
Ripple and Noise (20 MHz Bandwidth)	5.1 VDC model:	160 mVp-p max.
	12 VDC model:	180 mVp-p max.
	15 VDC model:	230 mVp-p max.
	24 VDC model:	360 mVp-p max.
	48 VDC model:	720 mVp-p max.
	5.1 VDC model:	110 mVp-p typ.
Capacitive Load	12 VDC model:	120 mVp-p typ.
	15 VDC model:	150 mVp-p typ.
	24 VDC model:	240 mVp-p typ.
	48 VDC model:	480 mVp-p typ.
	5.1 VDC model:	8'000 µF max.
	12 VDC model:	3'900 µF max.
Minimum Load	15 VDC model:	3'300 µF max.
	24 VDC model:	1'500 µF max.
	48 VDC model:	680 µF max.
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- At 230 VAC	50 ms min.
	- At 115 VAC	10 ms min.
Start-up Overshoot Voltage		5% max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		105% min. of Iout max.
Overvoltage Protection		120% typ. of Vout nom. (By Zener diode)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## Safety Specifications

Safety Standards	- IT / Multimedia Equipment  - Industrial Control Equipment - Medical Equipment  - Certification Documents	EN 60950-1 IEC 60950-1 UL 60950-1 UL 508 EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 CSA-C22.2, No 60601-1 2 x MOPP (Means Of Patient Protection) <a href="http://www.tracopower.com/overview/tmm60c">www.tracopower.com/overview/tmm60c</a>
Protection Class		Class II (Prepared): Reinforced Insulation
Pollution Degree		PD 2
Over Voltage Category		OVC II

## EMC Specifications

EMI Emissions	- Conducted Emissions  - Radiated Emissions	EN 61000-6-3 (Generic Residential) EN 61000-6-4 (Generic Industrial) EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15 class B (internal filter) EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15 class B (internal filter)
EMS Immunity	- Electrostatic Discharge  - RF Electromagnetic Field - EFT (Burst) / Surge  - Conducted RF Disturbances - PF Magnetic Field - Voltage Dips & Interruptions	EN 55024 (IT Equipment) EN 61000-6-1 (Generic Residential) EN 61000-6-2 (Generic Industrial) EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, $\pm 15$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 8$ kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, $\pm 2$ kV, perf. criteria A L to L: EN 61000-4-5, $\pm 1$ kV, perf. criteria A EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 30 A/m, perf. criteria A 230 VAC / 50 Hz: 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 1 period, perf. criteria A >95%, 250 periods, perf. criteria B

## General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Storage Temperature	-40°C to +80°C -40°C to +95°C
Power Derating	- High Temperature	3.8 %/K above 60°C
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		100 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		240 VAC
Isolation Test Voltage	- Input to Output, 60 s	4'000 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M $\Omega$ min.
Leakage Current	- Touch Current	100 $\mu$ A max.
Reliability	- Calculated MTBF	125'000 h (MIL-HDBK-217F, ground benign)
Housing Material		Plastic resin (UL 94 V-0 rated)
Connection Type		Screw Terminal


All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Weight	380 g
Environmental Compliance - Reach	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a>
- RoHS	<a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>

### Supporting Documents

Overview Link (for additional Documents)	<a href="http://www.tracopower.com/overview/tmm60c">www.tracopower.com/overview/tmm60c</a>
--	--

### Outline Dimensions

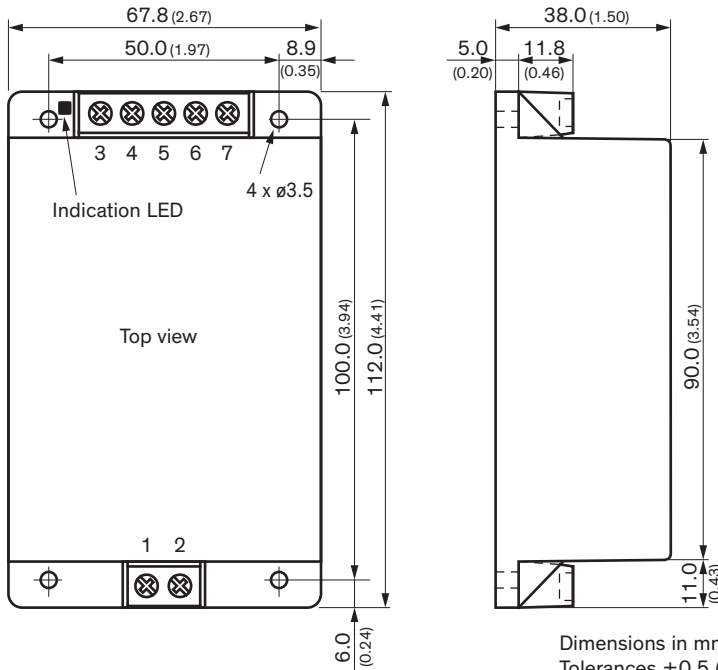

Pinout	
Pin	Single Output
1	AC (N)
2	AC (L)
3	NC
4	+Vout
5	NC
6	-Vout
7	NC

NC: Not connected

Dimensions in mm (inch)  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin  $\varnothing$   $1.0 \pm 0.1$  ( $0.04 \pm 0.004$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )