



Item no.: 294-4043  
 Product description: TERMINAL BLOCK FOR FIELD CONNECTION without ground contact without snap-in mounting feet 3 / 2 / 1 3 POLE

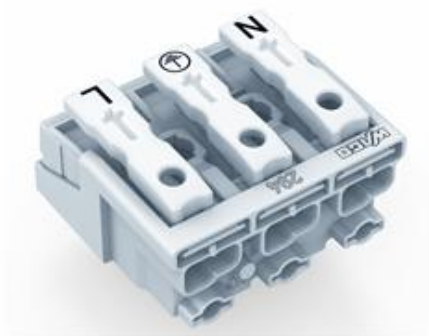

Produkt kann von Bild abweichen / product may differ

Packing unit 500 pieces

RoHS compliant

Color	white
pole count	3
Height	17 mm
Height	0.669 in
Width	30 mm
Width	1.181 in
Depth	27.3 mm
Depth	1.075 in
Pollution degree	2
Measured voltage EN	500 V
Measured shock voltage	4 kV
Current intensity EN	24 A
T Identification	T 85
Pollution degree	2
Measured voltage EN	500 V
Measured shock voltage	4 kV
Current intensity EN	24 A
T Identification	T 85
Connection method	CAGE CLAMP®S Connection

Cross section [mm<sup>2</sup>]  
Cross section [AWG]  
Wiring method

0.5 - 2.5 mm<sup>2</sup>  
18 - 12 AWG  
solid, stranded or fine-stranded



Number of strands	2
Cross section [mm <sup>2</sup> ]	0.5 - 1.5 mm <sup>2</sup>
Cross section [AWG]	18 - 14 AWG
Wiring method	with ferrule
Number of strands	2
Connection method	PUSH WIRE®
Cross section [mm <sup>2</sup> ]	0.5 - 2.5 mm <sup>2</sup>
Cross section to [AWG]	18 - 14 AWG
Wiring method	Solid
Cross section [mm <sup>2</sup> ]	0.5 - 1.5 mm <sup>2</sup>
Cross section to [AWG]	18 - 14 AWG
Wiring method	with ferrule
Cross section from [mm <sup>2</sup> ]	0.5 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Cross section from [AWG]	18 AWG
Cross section to [AWG]	16 AWG
Wiring method	Solid
Cross section from [mm <sup>2</sup> ]	0.5 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1 mm <sup>2</sup>
Cross section from [AWG]	18 AWG
Cross section to [AWG]	16 AWG
Wiring method	with ferrule



Cross section from [mm <sup>2</sup> ]	0.5 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	0.75 mm <sup>2</sup>
Cross section from [AWG]	18 AWG
Wiring method	solid
Strip length from	8 mm
Strip length to	9 mm
Material group	IIIa

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected