

AC axial fans

A-Range, Ø 200

- **Material:** sheet steel (coated in black)
- **Direction of rotation:** direction of air flow "V" counter-clockwise, direction of air flow "A" clockwise
- **Type of protection:** IP 44



ebm-papst • Mulfingen


Nominal data		Characteristic	Voltage	Frequency	Air flow	Speed/rpm	Power input	Current draw	Capacitor	Sound pressure level	Max. back pressure	Perm. amb. temp.	Mass	Selection	Cable exit	Direction of air flow	Dimensions			
Type	Motor	VAC	Hz	m³/h	min⁻¹	W	A	µF/VDB	dB(A)	Pa	°C	kg	Type	S/A/B		c				
*2D 200 ⁽¹⁾	M2D068-CF	①	230/400	50	830	2800	53	0,15	---	67	140	75	1,7	*2D 200	S	"V"	A2D200-AA02 -01	S2D200-BA02 -01	W2D200-CA02 -01	21
			230/400	60	940	3150	70	0,14	---	70	140	75				"A"	A2D200-AA02 -02	S2D200-BA02 -02	W2D200-CA02 -02	21
*2E 200	M2E068-CA	②	230	50	740	2740	50	0,24	1,5/400	65	200	75	1,4	*2E 200	B	"V"	A2E200-AF02 -01	S2E200-BF02 -01	W2E200-CF02 -01	21
			230	60	830	3120	61	0,28	1,5/400	69	200	75				"A"	A2E200-AF02 -02	S2E200-BF02 -02	W2E200-CF02 -02	21
*4D 200 ⁽¹⁾	M4D068-CF	③	230/400	50	390	1450	22	0,09	---	51	70	60	1,5	*4D 200	S	"V"	A4D200-AA04 -01	S4D200-BA04 -01	W4D200-CA04 -01	20
			230/400	60	460	1730	21	0,07	---	55	100	80				"A"	A4D200-AA04 -02	S4D200-BA04 -02	W4D200-CA04 -02	20
*4S 200	M4S068-BF	④	230	50	375	1380	40	0,30	---	52	60	50	1,2	*4S 200	S	"V"	A4S200-AA02 -01	S4S200-BA02 -01	W4S200-CA02 -01	20
			230	60	445	1630	34	0,24	---	53	80	65				"A"	A4S200-AA02 -02	S4S200-BA02 -02	W4S200-CA02 -02	20

subject to alterations

⁽¹⁾ current draw established at 400 VAC (V)

	n [min⁻¹]	P ₁ [W]
① ①	2785	53
① ②	2770	55
② ①	2670	51
② ②	2670	50

Characteristics

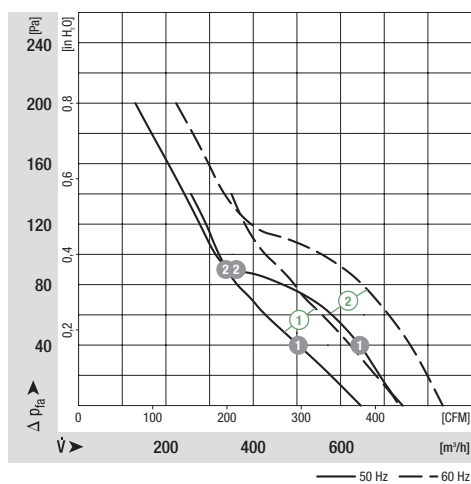

	n [min⁻¹]	P ₁ [W]
③ ①	1460	24
③ ②	1460	24
④ ①	1375	40
④ ②	1380	39

Characteristics

