


DATE	DESCRIPTION	REV.
8.9.99	CHANGE AS PER ECN 99-054	A
6.7.05	CHANGE AS PER ECN 05-030	B


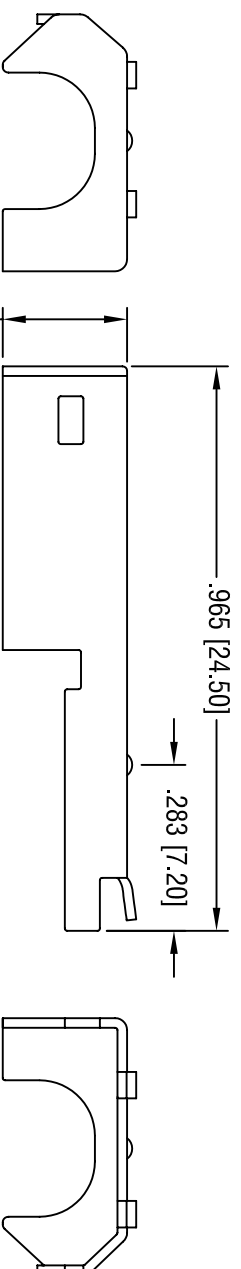


Notes:

Shell: Mat'l: Phosphor Bronze,
Finish: Tin Plate over
Nickel Plate.

Insulator: Mat'l: Thermoplastic
UL 94V-0

Contacts: Mat'l: Phosphor Bronze
Finish: Gold Plate over
Nickel Plate on
Contact Area.
Tin Plate over
Nickel Plate
on Solder Tail.

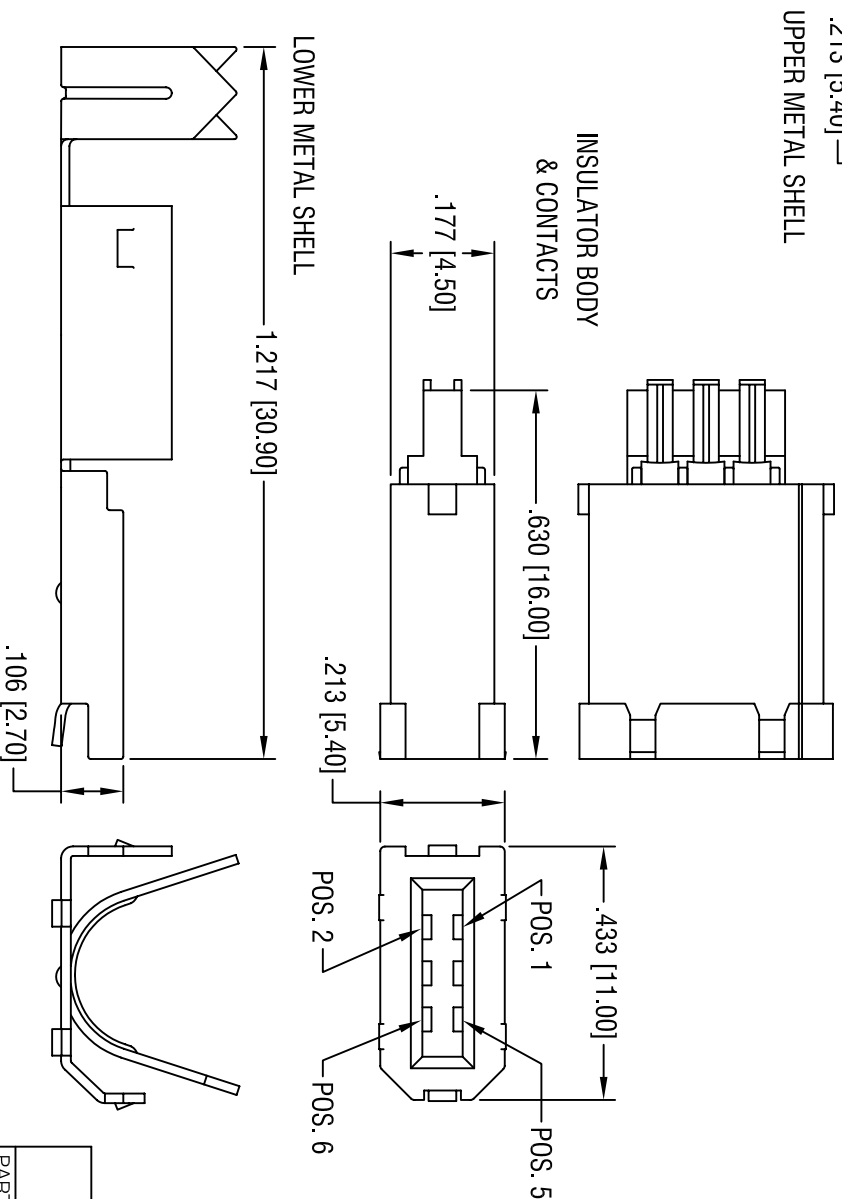

Electrical Specifications
Withstanding Voltage:
500V ±50V DC
Contact Current Rating:
1A Max.
Contact Resistance:
30 milliohms Max.
Insulation Resistance:
1000 Megohms Min.
Dielectric Withstanding:
750V AC
Operating Temperature:
0°C to 40°C

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.			
ASTORIA, N.Y. 11105-2017			
PART NAME		IEEE 1394 FIREWIRE PLUG	
MATERIAL		AS NOTED	
FINISH	AS NOTED	DRN BY	BOONE
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .010 [± 0.25]	C/M	928
ANGULAR	± 1°		
		App'd	LN
		DATE	5.22.98
		SCALE	3X