


## Product information

### 8 ports, 5-15 M - ASBM 8/LED 3-345/5 M

Industrial Connecting Solutions:I/O Modules:Passive distributors:M8 Passive Distributors:fixed control cable:4-12 ports, actuator/sensor distribution box:8 ports, 5-15 M

[https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205060/en/ASBM\\_08LED\\_3\\_345\\_05/ustate](https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205060/en/ASBM_08LED_3_345_05/ustate)

Name	8 ports, 5-15 M
	
	Miniature actuator/sensor distribution box, 8-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 5 meter.
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Type	ASBM 8/LED 3-345/5 M
Order No.	65355
Description	Miniature actuator/sensor distribution box, 8-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 5 meter.
Number of contacts	3 (M8)
Version	8 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
<b>Classification</b>	
Belden brand	Lumberg-Automation
<b>Mechanical data</b>	
Thread	M8
LED display present	✓
<b>Environmental conditions</b>	
Environmental temperature	-25 °C ... 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
<b>Materials</b>	
Housing material / Molded body	PBT
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuSn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
<b>Electrical data</b>	
Contact resistance	≤ 5 mΩ
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
<b>Approvals</b>	
Approvals	cURus
<b>Cable</b>	
Cable length	5 m
Cable number	345
Cable description	Cable for actuator/sensor distribution boxes
Color of jacket	black
Material of outer jacket	PUR
Outer diameter of the cable	6.3 mm
Number of conductors	10


Industrial Connecting Solutions:I/O Modules:Passive distributors:M8 Passive Distributors:fixed control cable:4-12 ports, actuator/sensor distribution box:8 ports, 5-15 M

[https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205060/en/ASBM\\_08LED\\_3\\_345\\_05/ui:state](https://www.e-catalog.beldensolutions.com:443/link/57078-24228-255441-199791-199792-204935-204937-205060/en/ASBM_08LED_3_345_05/ui:state)

<b>Cable design</b>	10 x 0.25 mm <sup>2</sup>
<b>Conductor design</b>	finest stranded, 32 x Ø 0.1 mm
<b>Flame resistant according to standard</b>	IEC 60332-2, CSA FT-2
<b>Scope of delivery and accessories</b>	
<b>Scope of delivery</b>	ZVKM: 2 M8 dust covers for unused sockets ZBR 5/10: attachable labels, 5 pieces

**Picture**

**Drawing**

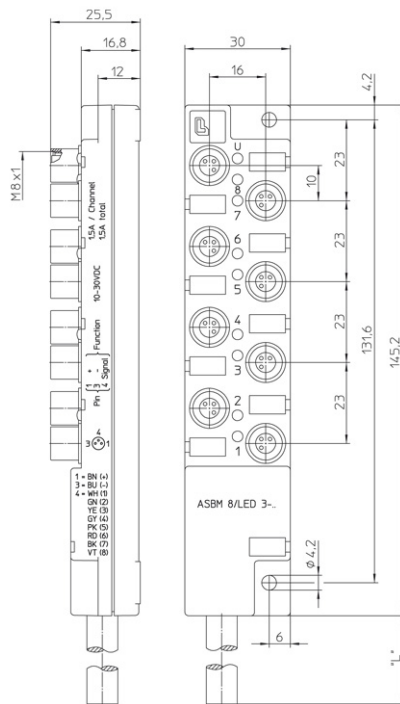

**Belden Deutschland GmbH**

Im Gewerbepark 2  
58579 Schalksmühle  
Germany  
Phone: +49 7127/14-1806  
E-Mail: [icos-sales@belden.com](mailto:icos-sales@belden.com)

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.