


### Features

- ◆ DIP-24 package with industry standard footprint
- ◆ Wide 2:1 input voltage range
- ◆ Input filter meets EN 55022, class A
- ◆ Extended operating temperature range: -40°C to +85°C
- ◆ Remote On/Off
- ◆ Shielded metal casing with insulated baseplate
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty

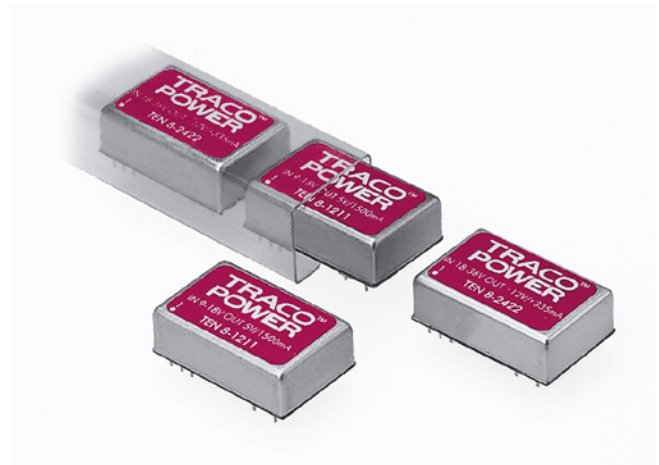

The TEN 8 series is a family of high performance 8 Watt dc/dc-converter modules featuring wide 2:1 input voltage ranges in a DIP-24 package with industry standard footprint. A very high efficiency allows an operating temperature range of -40°C to +85°C. A built-in EMI input filter complies with EN 55022, class A without external components. Further standard features include remote On/Off and short-circuit protection.

Typical applications for these converters are battery operated equipment, instrumentation, communication and industrial electronics, everywhere where isolated, tightly regulated voltages are required and space is limited on the PCB.

Models				
Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 8-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	2'000 mA	80 %
TEN 8-1211		5 VDC	1'500 mA	83 %
TEN 8-1212		12 VDC	665 mA	88 %
TEN 8-1213		15 VDC	535 mA	87 %
TEN 8-1221		± 5 VDC	± 800 mA	83 %
TEN 8-1222		±12 VDC	± 335 mA	87 %
TEN 8-1223		±15 VDC	± 265 mA	85 %
TEN 8-2410	18 – 36 VDC (24 VDC nominal)	3.3 VDC	2'000 mA	80 %
TEN 8-2411		5 VDC	1'500 mA	83 %
TEN 8-2412		12 VDC	665 mA	86 %
TEN 8-2413		15 VDC	535 mA	85 %
TEN 8-2421		± 5 VDC	± 800 mA	82 %
TEN 8-2422		±12 VDC	± 335 mA	86 %
TEN 8-2423		±15 VDC	± 265 mA	85 %
TEN 8-4810	36 – 75 VDC (48 VDC nominal)	3.3 VDC	2'000 mA	80 %
TEN 8-4811		5 VDC	1'500 mA	83 %
TEN 8-4812		12 VDC	665 mA	86 %
TEN 8-4813		15 VDC	535 mA	86 %
TEN 8-4821		± 5 VDC	± 800 mA	85 %
TEN 8-4822		±12 VDC	± 335 mA	87 %
TEN 8-4823		±15 VDC	± 265 mA	87 %

### Input Specifications

Input current (no load)		12 Vin models: 15 mA typ. 24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ.
Input current (full load)	12 Vin; 12 Vin; 24 Vin; 24 Vin; 48 Vin; 48 Vin;	3.3 VDC models: 720 mA typ. other output models: 800 mA typ. 3.3 VDC models: 360 mA typ. other output models: 400 mA typ. 3.3 VDC models: 180 mA typ. other output models: 200 mA typ.
Surge voltage (100 msec. max.)		12 Vin models: 36 V max.. 24 Vin models: 50 V max.. 48 Vin models: 100 V max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A For 12 Vin models with external input capacitor: 4.7 $\mu$ F / 25 V 1210 MLCC
ESD (electrostatic discharge)		EN 61000-4-2, air $\pm$ 8 kV, contact $\pm$ 6 kV, perf. criteria A
Radiated immunity		EN 61000-4-3, 10 V/m, perf. criteria A
Fast transient / Surge		EN 61000-4-4, $\pm$ 2 kV, perf. criteria A EN 61000-4-5, $\pm$ 1 kV perf. criteria A With external input capacitor e.g. Nippon chemi-con KY 220 $\mu$ F, 100 V, ESR 48 mOhm
Conducted immunity		EN 61000-4-6, 10 Vrms, perf. criteria A

### Output Specifications

Voltage set accuracy		$\pm$ 1 %
Regulation	– Input variation Vin min. to Vin max – Load variation 0 – 100 %	0.2 % max. single output models: 1 % max. dual output models: 1 % max. – Load cross variation 25 % / 100 % 5 % max.
Temperature coefficient		0.02 %/K
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk typ.
Start up time (nominal Vin and constant resistive load)		700 ms max.
Transient response (25% load step change)		200 $\mu$ s typ.
Short circuit protection		indefinite (automatic recovery)
Over load protection		150% of Iout max. typ. foldback
Capacitive load		3.3 Vout models: 3300 $\mu$ F max. 5 Vout models / $\pm$ 5 Vout models: 1600 $\mu$ F max. / $\pm$ 1000 $\mu$ F max. 12 Vout models / $\pm$ 12 Vout models: 350 $\mu$ F max. / $\pm$ 160 $\mu$ F max. 15 Vout models / $\pm$ 15 Vout models: 240 $\mu$ F max. / $\pm$ 100 $\mu$ F max.

### General Specifications

Temperature ranges	– Operating – Case temperature – Storage	–40 °C to +85°C +100 °C max. –55 °C to +105°C
Derating		3.3 %/K above 70°C
Humidity (non condensing)		95 % rel H max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**General Specifications**

Reliability, calculated MTTF (MIL-HDBK-217F ground benign, at 25°C)	>1.2 Mio h
Isolation voltage (60sec.) – Input/Output	1'500 VDC
Isolation capacity – Input/Output	300 pF max.
Isolation Resistance – Input/Output	>1'000 MOhm
Switching frequency	300 kHz typ. (pulse width modulation PWM)
Vibration and thermal shock	MIL-STD-810E
Safety standards	UL/cUL 60950-1, IEC/EN 60950-1
Safety approvals – UL/cUL	<a href="http://www.ul.com">www.ul.com</a> -> certifications -> File E188913
Remote On/Off	On: 3.5 ... 12 VDC or open circuit Off: 0 ... 1.2 VDC or short circuit pin 1 and pin 2/3 Off idle current: 2.5 mA
Environmental compliance – Reach – RoHS	<a href="http://www.tracopower.com/products/ten8-reach.pdf">www.tracopower.com/products/ten8-reach.pdf</a> RoHS directive 2002/95/EC

**Physical Specifications**

Case material	copper, nickel plated
Baseplate material	non conductive plastic
Potting material	epoxy (UL94V-0 rated)
Weight	17 g (0.60 oz)
Soldering temperature max.	265 °C / 10 sec.

**Outline Dimensions**

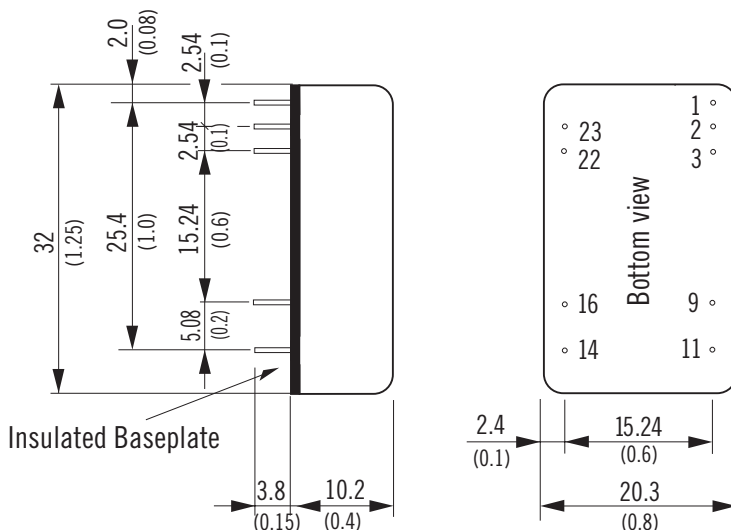

Pin-Out		
Pin	Single	Dual
1	Remote On/Off	Remote On/Off
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No con.	Common
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], ( ) = Inch  
 Pin diameter  $\varnothing 0.5 \pm 0.05$  (0.02  $\pm 0.002$ )  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )

Specifications can be changed any time without notice.